

Cleco®

Pneumatic Assembly Tools





Warranty, Lubrication, Safety	2
Model Number Index	4
Screwdrivers	6
Introduction	6
Clutch Selection Guide	7
Inline – Clutch	8
Pistol – Clutch	10
Pistol – Stall	14
Nomenclature	15
Accessories	16
Balance Arms	19
Introduction	19
Accessories	22
Angle Nutrunners	23
Introduction	23
Angle Nutrunners – Clutch	26
Angle Nutrunners – Stall	30
Reaction Bar & Swingbar Nutrunners	32
Introduction	32
Inline & Pistol Tools	34
Specialty Tools	36
Flush Socket Nutrunners	36
Crowfoot Nutrunners	38
Hold & Drive Nutrunners	40
Tube Nut Wrenches	42
Nutrunner Accessories	44
General	44
Torque Verifier	45
Ratchet Wrenches	48
Introduction	48
Accessories	53
Pulse Nutrunners	56
Introduction	56
Accessories	60
Impact Wrenches	62
Introduction	62
Impact Wrenches	64
General Accessories	66
Balancers	66
Apex Fastener Tools	68
General Information	72
Conversion Tables	72
Sales & Service Centers	74
On-Line Catalogs	75

Warranty

Apex Tool Group, LLC warrants products and parts sold by it, insofar as they are of its own manufacture, against defects of material and workmanship, under normal use and service in accordance with its written instructions, recommendations, and ratings for installation, operation, maintenance, and service of products, for a period of **ONE YEAR**

FROM THE DATE OF INITIAL USE, BUT IN NO EVENT SHALL THE WARRANTY EXCEED 24 MONTHS FROM DATE OF DELIVERY TO DISTRIBUTOR. Proof of Purchase with shipment date must be furnished by the user to validate the warranty. This warranty applies only to products manufactured by Apex Tool Group and specifically excludes products manufactured by others. Products not manufactured by Apex Tool Group are warranted only to the extent and in the manner warranted to Apex Tool Group by the manufacturer

and then only to the extent Apex Tool Group is able to enforce such warranty. Apex Tool Group's warranty with respect to products manufactured by it is limited to the repair or replacement, as Apex Tool Group may elect, of any defective part regarding which the Distributor has given 5 days written notice from the discovery of such defect. Installation and transportation costs are not included. Apex Tool Group shall have the option of requiring the return to it of the defective material, transportation prepaid, for inspection. No allowance will be made for repairs without Apex Tool Group approval. **APEX TOOL GROUP MAKES NO OTHER WARRANTY OF ANY KIND WHATSOEVER, EXPRESSED OR IMPLIED, AND HEREBY DISCLAIMS ALL WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

Lubrication Products

Apex Tool Group products are classified as non-hazardous manufactured items, defined in the OSHA 1910.1200 Hazard Communication Standard as "Articles". These products, under conditions of normal use, do not release or cause exposure to a hazardous chemical.

Under normal conditions of use, lubrication products sold separately for or used within these tools should not cause an exposure hazard. Refer to the Material Safety Data Sheet (M.S.D.S.) for Safety and Disposal Information. M.S.D.S. sheets are available upon request from Apex Tool Group.

Apex Tool Group is also aware of, and complies with, the provisions of section 611 amendments

to the Clean Air Act of 1990. No ozone depleting chemicals have been used in the manufacture of our products.

If you resell or distribute these products, you have the responsibility for ensuring that the Material Safety Data Sheets are provided to the purchaser.

Proper lubrication is essential to the economical operation of pneumatic and electric tools. Apex Tool Group perform better and their life is extended by using the recommended lubricants. All lubricants that are listed in the accessory section of this catalog have undergone extensive testing and are recommended for use with Apex Tool Group products.

Fastener Selection

The suggested fasteners listed in this catalog are determined by matching a tool's maximum rated load to Society of Automotive Engineers (SAE) Grade 5 and International Organization of Standardization (ISO) Grade 9.8 fasteners. The torque capabilities for SAE Grade 5 fasteners are from SAE Manual, SAE J429 (Mechanical and Material Requirement for Externally Threaded Fasteners). The torque capabilities for ISO Grade 9.8 fasteners are from ISO 898-1 (Mechanical Properties of Fasteners). All values selected are based on lubricated fasteners.

The suggested fasteners listed in this catalog are advisory only, and Apex Tool Group recommends that you further consult other technical references before final tool selection. Reliance on the accuracy of this catalog data for any purpose by anyone is at the sole risk of that person. Apex Tool Group is not responsible for any loss, claim, or damage arising from improper tool selection.

The torque values listed under the headings "TORQUE" are tested on an ISO 5393 soft joint rate test fixture unless otherwise stated by a special note.

General Safety Instructions

These Safety Instructions must be accessible to the operator at all times. They must be shown and made available to all people involved in the use of the tool.



The operator must understand the Safety Instructions and the Installation, Operation, and Adjustment Procedures provided in the Technical Manual (included with the tool). These Safety Instructions are not intended to be all inclusive. Study and comply with all applicable Federal, State, and Local Regulations. Contact your local distributor for assistance.



This symbol identifies the potential for a hazardous situation. If this warning is not followed, a serious injury could occur.



Always disconnect the tool from the air hose before adjusting or repairing.



Immediately shut off the tool in the case of unusual sound or vibration. Disconnect the tool from the air hose. Have a qualified person check the tool and repair before using.

When unpacking the tool, closely check for shipping damages and accuracy of the shipping documentation.



Do not wear loose clothing, jewelry, or rings. Injury may result from being caught in tools. Avoid direct contact with lubricants, grease or adhesives.



Safety glasses or face shield must be worn.



Wear gloves, ear protection and other protective equipment when required.

Do not modify the tool, any guard or accessory unless approved in writing by Cooper Power Tools.



We recommend the use of a reaction bar to prevent an uncontrollable reaction of the tool. This use is dependant on the following factors: torque, joint, air pressure, form of the tool and the individual user. Consider the use of reaction bars to prevent possible injury.

Implement and follow a Safety Maintenance Program to provide inspection and maintenance of all phases of tool operation and air supply equipment.



Sockets and bits used with nutrunners and screwdrivers should be of the power tool or industrial type. Do not use hand tool sockets on a power tool. Hand tool sockets can break, resulting in a hazard of flying pieces. Worn sockets or bits reduce the power delivered to the fastener, cause drive wear and increase the chance for breakage. Inspect sockets, bits and drives for wear or damage and replace as necessary.

Noise & Vibration

Refer to test data page included with tool.

Intended Use

Air assembly tools are intended for tightening of threaded joints only. Tools must be used for their designated purpose. Do not use as a hammer, lever or other improper usage that can cause tool damage and lead to operator injury.

Installation & Operation

Only qualified and trained operators should install, adjust or use air assembly tools.

Connect the tool to an air line with a maximum pressure of 6.2 bar (90 psig). Adjust the air line lubrication to a minimum to reduce possible contamination of the environment by the exhaust air. The work area must be well ventilated.



Inspect the air hose and fittings. Do not use damaged, frayed or deteriorated hoses. A hose rupture can cause injury.



When using right angle nutrunners, be sure the throttle is positioned relative to the angle head so the throttle will not become wedged against an adjacent object in the ON position due to torque reaction.

The angle head may be repositioned with respect to the lever to accommodate proper location for the task. If the tool is to be reversed, locate throttle lever in a neutral position that will prevent entrapment.

Keep the tool clean and dry to provide the best possible grip. The tool should be held in such a way to be safe and comfortable. Firmly grasp the handle of the tool and apply the socket to the joint before starting the tool.

Adjusting Torque For Shut-Off Tools



Screwdrivers and nutrunners with clutches can stall rather than shut off if the clutch is adjusted over the maximum power output of the tool, or if there is a drop in the air pressure. Low or fluctuating air pressure can cause tool to fail to shut off! The user must be prepared to resist the torque until the throttle is released.

Expose clutch through movement of the clutch shield. Using the hex wrench supplied, turn clockwise for maximum torque or turn counterclockwise for minimum torque.

NOTE: For best results, start from "MIN" torque and adjust in "MAX" direction.

Maintenance, Assembly & Disassembly

Inspect air assembly tools every 500 operating hours or every six months, whichever comes first. Replace worn parts using only genuine Cooper Power Tools replacement parts.

Model Number Index

Model	Page	Model	Page	Model	Page	Model	Page
200427.....	66	14SCA02Q.....	9	24NRS43H29.....	51	34RAS28AH3.....	31
200428.....	66	14SCA03B.....	9	24NRS52H37.....	51	34RAS30F1.....	36
200429.....	66	14SCA03Q.....	9	24RAA06AL3.....	27	34RAS36AX3.....	31
105PH554.....	59	14SCA04B.....	9	24RAA07AL3.....	27	34RAS40F2.....	36
105PH55Q.....	59	14SCA04Q.....	9	24RAA11AL3.....	27	34RAS52F2.....	36
110PTHD55Q.....	61	14SCA05B.....	9	24RAA12AM3.....	27	34RAS58F3.....	36
11PHL802.....	59	14SCA05Q.....	9	24RAA19AM3.....	27	34RAS58H3.....	40
11PHL80Q.....	59	14SCA06B.....	9	24RAA23AM3.....	27	34RAS73F3.....	36
11PTHD652.....	59	14SCA06Q.....	9	24RAS13AM3.....	31	34RAS73H3.....	40
11PTHD653.....	59	14SPA02B.....	9	24RTA12.....	42	34RCA30D1.....	40
11PTHD65Q.....	59	14SPA02Q.....	9	24RTA20T2.....	42	34RCA30D3.....	40
120PTHD554.....	59	14SPA03B.....	9	24RTA30T3.....	42	34RCS29D1.....	40
140PH45Q.....	59	14SPA03Q.....	9	24RTA40T4.....	42	34RCS29D3.....	40
140PTHC25Q.....	59	14SPA04B.....	9	250PHF406.....	59	35PHL703.....	59
14BPA02Q.....	9	14SPA04Q.....	9	250PTHFC226.....	59	35PTHD653.....	59
14BPA03Q.....	9	14SPA05B.....	9	2RSA-10B.....	9	35PTHD65Q.....	59
14BPA04Q.....	9	14SPA05Q.....	9	2RSA-10SB.....	9	35RSA-10-3.....	9
14BPA05Q.....	9	14SPA06B.....	9	30PHL70Q.....	59	35RSA-10Q.....	9
14BPA06Q.....	9	14SPA06Q.....	9	34NRS29H15.....	51	35RSA-20Q.....	9
14PCA02Q.....	11	14TCA02Q.....	11	34NRS31H16.....	51	35RSA-5-3.....	9
14PCA03Q.....	11	14TCA03Q.....	11	34NRS35H20.....	51	35RSA-5Q.....	9
14PCA04Q.....	11	14TCA04Q.....	11	34NRS36H15.....	51	35RSA-7Q.....	9
14PCA05Q.....	11	14TCA05Q.....	11	34NRS36H18.....	51	35RSAP-10Q.....	13
14PCA06Q.....	11	14TCA06Q.....	11	34NRS38H16.....	51	35RSAP-20Q.....	13
14PTA02Q.....	11	14TTA02Q.....	11	34NRS42H25.....	51	35RSAP-7Q.....	13
14PTA03Q.....	11	14TTA03Q.....	11	34NRS46H18.....	51	35RSAPT-10Q.....	13
14PTA04Q.....	11	14TTA04Q.....	11	34NRS46H20.....	51	35RSAPT-20Q.....	13
14PTA05Q.....	11	14TTA05Q.....	11	34NRS48H29.....	51	35RSAPT-5Q.....	13
14PTA06Q.....	11	14TTA06Q.....	11	34NRS52H25.....	51	35RSAPT-7Q.....	13
14PTA07Q.....	11	14TTA07Q.....	11	34NRS53H37.....	51	35RSATP-10-3.....	13
14PTA10Q.....	11	14TTA10Q.....	11	34NRS63H29.....	51	35RSATP-10Q.....	13
14PTA15Q.....	11	14TTA15Q.....	11	34NRS68H37.....	51	35RSATP-20Q.....	13
14PTS02Q.....	14	14TTS02Q.....	14	34RAA08AL3.....	27	35RSATP-5-3.....	13
14PTS03Q.....	14	14TTS03Q.....	14	34RAA09F1.....	36	35RSATP-5Q.....	13
14PTS04Q.....	14	14TTS04Q.....	14	34RAA11AL3.....	27	35RSATP-7Q.....	13
14PTS05Q.....	14	14TTS05Q.....	14	34RAA15AM3.....	27	35STHFA404.....	59
14RAA02AH2.....	27	15STHC40Q.....	59	34RAA16F1.....	36	35STHFA40Q.....	59
14RAA02AH3.....	27	15STHFC40Q.....	59	34RAA26AH3.....	27	35STHFC404.....	59
14RAA02AM2.....	27	160PH456.....	59	34RAA28AH3.....	27	35STHFC40Q.....	59
14RAA03AH2.....	27	160PTHC256.....	59	34RAA28F1.....	36	400PHF356.....	59
14RAA03AH3.....	27	20PHL703.....	59	34RAA33AX3.....	27	400PTHFC206.....	59
14RAA03AL2.....	27	20PHL70Q.....	59	34RAA33F2.....	36	41NDR130H15.....	52
14RAA03AM2.....	27	20PTHD753.....	59	34RAA37AX3.....	27	41NDR130H16.....	52
14RAA04AM2.....	27	20PTHD75Q.....	59	34RAA47AX3.....	27	41NDR130H18.....	52
14RAA05AM2.....	27	24NRS15A12.....	51	34RAA47F2.....	36	41NDR130H20.....	52
14RAA06AH2.....	27	24NRS15A13.....	51	34RAA53F2.....	36	41NDR130H25.....	52
14RAA06AH3.....	27	24NRS20H15.....	51	34RAA53H3.....	40	41NDR172H15.....	52
14RAA07AH2.....	27	24NRS21H16.....	51	34RAA67F3.....	36	41NDR172H16.....	52
14RAA07AH3.....	27	24NRS23A13.....	51	34RAA67H3.....	40	41NDR172H20.....	52
14RAA09AH2.....	27	24NRS23H15.....	51	34RAA68AZ3.....	27	41NDR172H25.....	52
14RAA09AH3.....	27	24NRS23H20.....	51	34RAA68AZ4.....	27	41NDR236H15.....	52
14RAA11AH2.....	27	24NRS24A12.....	51	34RAA75AZ3.....	27	41NDR236H16.....	52
14RAA11AH3.....	27	24NRS24H16.....	51	34RAA75AZ4.....	27	41NDR236H18.....	52
14RAA12AH2.....	27	24NRS24H18.....	51	34RAA94F3.....	36	45NAB-3P-4.....	29
14RAA12AH3.....	27	24NRS29H18.....	51	34RAA94H3.....	40	45RNAB-2-4.....	35
14RAS03AM2.....	31	24NRS29H25.....	51	34RAS103F3.....	36	45RNAB-2P-4.....	29
14RAS04AH2.....	31	24NRS30H20.....	51	34RAS103H3.....	40	45RNAB-2T-4.....	29
14RAS05AM2.....	31	24NRS33H29.....	51	34RAS10F1.....	36	45RNAB-3-3.....	35
14RAS06AH3.....	31	24NRS34H25.....	51	34RAS11AL3.....	31	45RNAB-3P-4.....	29
14SCA02B.....	9	24NRS39H37.....	51	34RAS18F1.....	36	45RNAB-3T-4.....	29

Model	Page	Model	Page	Model	Page	Model	Page
45RNAB-4-3	35	64TTS1475D8	35	8RNP-10BQ	14	H30NDR08H18	52
45RNAB-4T-4	29	64TTS150D6	35	8RNP-20BQ	14	H30NDR08H20	52
45RNAB-6-3	35	64TTS175D6	35	8RSA-109	H30NDR08H25	52
45RNB-2T-4	31	64TTS1820D8	35	8RSA-10BQ9	PBA-12	21
45RNB-3P-4	31	64TTS1985D8	35	8RSA-209	PBA-12-AH	21
45RNB-3T-4	31	64TTS205D6	35	8RSA-20BQ9	PBA-12-WM	21
45RNB-4T-4	31	64TTS255D6	35	8RSA-309	PBA-18	21
55NAL-2T-4	29	64TTS345D6	35	8RSA-30BQ9	PBA-18-18-AH	21
55NAL-3P-4	29	64TTS34D4	35	8RSA-409	PBA-18-AH	21
55NAL-3T-4	29	64TTS3850D12	35	8RSA-40BQ9	PBA-24	21
55NAL-4P-4	29	64TTS425D6	35	8RSA-5BQ9	PBA-24-AH	21
55NAL-4T-4	29	64TTS44D4	35	8RSA-7BQ9	PBA-30-AH	21
55NL-2T-4	31	64TTS55D4	35	8RSAL-10BQ9	PL-12A	66
55NL-3T-4	31	64TTS570D6	35	8RSAL-209	SBA-12	21
55PHL604	59	64TTS640D8	35	8RSAL-20BQ9	SBA-12-AH	21
55PHL60Q	59	64TTS750D8	35	8RSAP-10BQ	13	SBA-18	21
55PTHD603	59	64TTS75D4	35	8RSAP-20BQ	13	SBA-18-AH	21
55RNAL-2-4	35	64TTS90D4	35	8RSAP-7BQ	13	SBA-24-AH	21
55RNAL-2T-4	29	64TTS930D8	35	8RSAPT-10BQ	13	SBA-30-AH	21
55RNAL-3-4	35	75NAL-2V-4	29	8RSAPT-20BQ	13	SBA-30-WM	21
55RNAL-3P-4	29	75NAL-2X-6	29	8RSAPT-40BQ	13	TVP-110-15-D	46
55RNAL-3T-4	29	75NL-2V-4	31	8RSAPT-5BQ	13	TVP-110-15-P	46
55RNAL-4-4	35	75NL-2X-6	31	8RSAPT-7BQ	13	TVP-110-15-S	46
55RNAL-4P-4	29	75NL-3V-4	31	8RSATP-10BQ	13	TVP-110-30-D	46
55RNAL-4T-4	29	75PHL504	59	8RSATP-20BQ	13	TVP-110-30-P	46
55RNAL-6T-4	29	75PHL50Q	59	8RSATP-30BQ	13	TVP-110-30-S	46
55RNL-2T-4	31	75RNAL-2V-4	29	8RSATP-5BQ	13	TVP-110-30-U	46
55RNL-3T-4	31	75RNAL-2X-6	29	8RSATP-7BQ	13	WL-200-3	65
55RNL-7T-4	31	75RNAL-3V-4	29	8SA-109	WL-200-4	65
60NDR092HD24	52	75RNAL-3X-6	29	8SA-10BQ9	WL-200-BQ	65
60NDR092HD40	52	75RNL-2X-6	31	8SA-20BQ9	WP-2049-6	65
60NDR092HD48	52	75RNL-3V-4	31	8SA-7BQ9	WP-2050-6	65
60NDR092HD56	52	75RNL-3X-6	31	BL-2A	66	WP-2059-6	65
64TTK110D4	35	7PHL90Q	59	BL-4A	66	WP-2059-8	65
64TTK125D4	35	7STHFA55Q	59	BL-6A	66	WP-2059-8-6E	65
64TTK1260D8	35	7STHFC55Q	59	BL-8A	66	WP-2060B-6	65
64TTK140D4	35	80PTHD604	59	BLL-6A	66	WP-2060B-8	65
64TTK1475D8	35	80PTHD60Q	59	BLL-8A	66	WP-2109B-8	65
64TTK150D6	35	88RSA-5C-39	BM-13A	66	WP-2110B-8	65
64TTK175D6	35	88RSA-5CQ9	BM-18A	66	WP-255-3P	65
64TTK1820D8	35	88RSA-7C-39	BM-25A	66	WP-455-4P	65
64TTK1985D8	35	88RSA-7CQ9	BM-35A	66	WP-455-4R	65
64TTK205D6	35	88RSAL-5C-39	BM-45A	66	WPS-2109B	65
64TTK255D6	35	88RSAL-5CQ9	BML-13A	66	WT-2109-8	65
64TTK345D6	35	88RSAPT-2CQ	13	CPBA-12-AH	21	WT-2109-8	65
64TTK34D4	35	88RSAPT-5C-3	13	CPBA-18	21	WT-2109-8	65
64TTK3850D12	35	88RSAPT-5CQ	13	CPBA-18-AH	21	WT-2110-8	65
64TTK425D6	35	88RSAPT-7CQ	13	CPBA-30	21	WT-2110-8	65
64TTK44D4	35	88RSATP-2C-3	13	CPBA-30-AH	21	WT-2119-12	65
64TTK55D4	35	88RSATP-2CQ	13	CPBA-30-WM	21	WT-2119-12	65
64TTK570D6	35	88RSATP-5C-3	13	CSBA-12-AH	21	WT-2120-12	65
64TTK640D8	35	88RSATP-5CQ	13	CSBA18	21	WT-2120-12	65
64TTK750D8	35	88RSATP-7C-3	13	CSBA-18-AH	21	WTS-2109	65
64TTK75D4	35	88RSATP-7CQ	13	CSBA-24	21	WTS-2109	65
64TTK90D4	35	88SA-5C-39	CSBA-30	21	WTS-2119	65
64TTK930D8	35	88SA-5CQ9	CSBA-30-AH	21	WTS-2119	65
64TTS110D4	35	88SA-7CQ9	H16NDR09H15	52	WTS-2120	65
64TTS125D4	35	8RNO-10BQ	14	H16NDR09H20	52	WTS-2120	65
64TTS1260D8	35	8RNO-20BQ	14	H30NDR08H15	52		
64TTS140D4	35	8RNO-7BQ	14	H30NDR08H16	52		



A tradition of quality is built into every screwdriver.

Cleco screwdrivers have long been recognized as the assembly tool standard against which all other brands are measured. With over 100 years of precision manufacturing experience built into each tool, Cleco screwdrivers provide users the ultimate in light and medium duty assembly tool performance.

Cleco's long standing tradition of service to the customer has led us to develop an extensive line of screwdrivers with configurations to suit a broad range of applications. Options including multiple reversing methods, different clutch styles, numerous handle alternatives, and a wide variety of accessories provide the building blocks for tool configurations designed to meet our customers' unique assembly application requirements.

The Cleco 2 series of inline Cleomatic screwdrivers offer dependable repetitive torque accuracy from .5 to 8 in.-lbs., ideal for miniature assemblies often found in extra light-duty electronics assembly using #0 to #5 screws.

In the light to medium duty assembly tool market, the ergonomically designed Cleco 14 series screwdrivers, with a torque range of 1.7 to 130 in.-lbs., are the ultimate tools for an infinite range of applications including computer, electronics, and appliance assembly.

With a torque range of 15 to 180 in.-lbs (1.7 to

60 MONTH WARRANTY

Cleco® 14 & 8 Series Cleomatic® Screwdrivers

Apex Tool Group warrants the 14 and 8 series Cleomatic screwdrivers and parts to be free from defects in workmanship and material of the life of the tool. The clutch assemblies are warranted for SIXTY MONTHS against failure or wear causing malfunction.

Apex Tool Group's obligation under this warranty is to repair or replace, without charge to the original purchaser, any part which does not meet the warranty outlined above during the active commercial production of this tool. This tool is to be returned to the factory with carrying charges prepaid.

This warranty shall not apply to any product that has been fixture mounted or subjected to misuse, negligence or accident; or in which parts not made or supplied by Apex Tool Group shall have been used; or which shall have been altered or repaired by other than Apex Tool Group personnel in a manner which in the determination of Apex Tool Group shall have affected its operation.


THIS WARRANTY CONSTITUTES THE ENTIRE OBLIGATION OF THE COMPANY RELATING TO THE SALE AND USE OF SUCH PRODUCT AND ITS MAXIMUM LIABILITY IS LIMITED TO THE PURCHASE PRICE OF SUCH PRODUCT. IN NO EVENT SHALL THE COMPANY BE LIABLE FOR CONSEQUENTIAL, INDIRECT, INCIDENTAL OR SPECIAL DAMAGES OF ANY NATURE ARISING FROM THE SALE OR USE OF SUCH PRODUCT.

20Nm), the 8 & 88 series Cleco screwdrivers cover the gamut of medium duty assembly applications ranging from lawn and garden equipment to small recreational vehicles, and even automotive.


Capable of running down fasteners as large as 5/16 (M6), the Cleco 35 series screwdrivers are the true workhorses of the medium to heavy-duty screw assembly market.

TORQUE
(Nm)

Inline

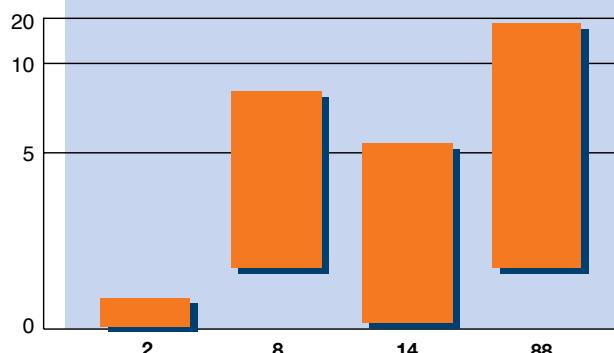


Pistol Grip

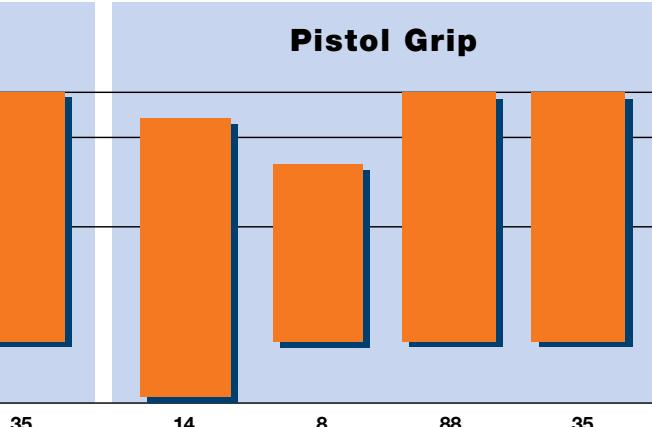




Choose the right tool to match your application.

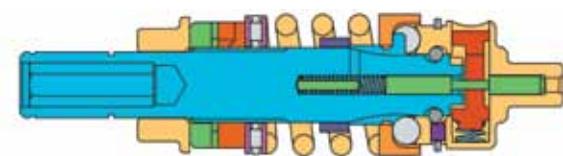

Clecomatic® Clutch

Clecomatic® Clutch

When tightening a fastener, torque is transmitted through the Clecomatic clutch to the fastener until the clutch can no longer transmit the increasing torque. The clutch then “slips”, which allows an internal mechanism to seal off air to the air motor, shutting off the tool at the user-adjusted preset torque level. This type of torque control allows maximum RPM from the tool for increased productivity. Since the tool doesn't dwell on the fastener as with a stall tool, tool wear and fatigue to the operator is reduced. The life of a Clecomatic tool is up to five times longer than that of a lever-operated, ratcheting clutch screwdriver.



Stall Type

Stall Type

The stall tool doesn't use a clutch but rather the output spindle is coupled to the last stage of gearing. Torque output from a stall tool may be controlled within fairly reasonable limits with an air pressure regulator. Stall type tools are also trigger activated.

CLUTCH SELECTION GUIDE FOR COMMON FASTENING APPLICATIONS

CLUTCH TYPE	APPLICATION	STANDARD BOLT & NUT	SHEET METAL SCREW	STANDARD BOLT & NUT	SELF-TAPPING SCREW	SELF-LOCKING NUT
Clecomatic®	EXCELLENT	EXCELLENT	EXCELLENT	EXCELLENT	EXCELLENT Where seating torque exceeds tapping torque	EXCELLENT
Stall Drive	FAIR Under certain conditions	GOOD Under certain conditions	FAIR Under certain conditions	FAIR Under certain conditions	FAIR Under certain conditions	FAIR

Inline Screwdrivers

2, 14, 8, 88, 35 Series Clecomatic Clutch



2 Series

Torque Range: .06 - .9 Nm 0.5 - 8 In. Lbs.

- Push-to-start
- Push button reverse
- External torque adjustment
- 1/4" quick change chuck



14 Series

Torque Range: .5 - 5.1 Nm 4 - 45 In. Lbs.

- Push-to-start and Push & Lever start
- External torque adjustment
- Bit & Finder & 1/4" quick change chuck



8 Series

Torque Range: 1.7 - 8.5 Nm 15.0 - 75 In. Lbs.

- Push button reverse and non-reversible
- Push-to-start and Push & Lever start
- Bit & Finder and Quick change



88 Series

Torque Range: 1.7 - 19 Nm 15 - 170 In. Lbs.

- Push button reverse and non-reversible
- Push-to-start and Push & Lever start
- Quick change & 3/8" square drive



35 Series

Torque Range: 1.7 - 20 Nm 15 - 180 In. Lbs.

- Quick change and square drive
- Short stroke button reverse
- External torque adjustment
(Quick change models)

Model Number		Torque Range		Free Speed	Length*		Weight		Air Consumption		
Bit & Finder*	1/4" Quick Change	in.-lbs.	Nm	RPM	in.	mm	lbs.	kg	Air Inlet NPT	Min. Hose I.D.	SCFM
Push-to-Start - Push Button Reverse											
2RSA-10B	0.5 - 8	.06 - 0.9	1000	7.60	194	0.5	0.20	1/8"	3/16"	6	
2RSA-10SB**	0.5 - 8	.06 - 0.9	1000	6.40	162	0.5	0.20	1/8"	3/16"	6	
14BPA02Q	4 - 14	0.5 - 1.6	2300	9.05	230	1.4	0.63	1/8"	3/16"	11	
14BPA03Q	4 - 19	0.5 - 2.1	1600	9.25	235	1.4	0.64	1/8"	3/16"	11	
14BPA04Q	3 - 33	0.3 - 3.7	920	9.05	230	1.3	0.61	1/8"	3/16"	11	
14BPA05Q	2 - 45	0.2 - 5.1	560	9.45	240	1.5	0.67	1/8"	3/16"	11	
14BPA06Q	2 - 45	0.2 - 5.1	220	9.45	240	1.5	0.68	1/8"	3/16"	11	

Push-to-Start - Collar Reverse

14SPA02B	14SPA02Q	4 - 19	0.5 - 2.1	2800	9.05	230	1.4	0.63	1/8"	3/16"	11
14SPA03B	14SPA03Q	4 - 26	0.5 - 2.9	1900	9.25	235	1.4	0.64	1/8"	3/16"	11
14SPA04B	14SPA04Q	3 - 40	0.4 - 4.5	1100	9.05	230	1.3	0.61	1/8"	3/16"	11
14SPA05B	14SPA05Q	2 - 45	0.2 - 5.1	660	9.45	240	1.5	0.67	1/8"	3/16"	11
14SPA06B	14SPA06Q	2 - 45	0.2 - 5.1	260	9.45	240	1.5	0.68	1/8"	3/16"	11

Lever Push-to-Start - Collar Reverse

14SCA02B	14SCA02Q	4 - 19	0.5 - 2.1	2800	9.80	249	1.5	0.69	1/8"	3/16"	11
14SCA03B	14SCA03Q	4 - 26	0.5 - 2.9	1900	10.00	254	1.5	0.70	1/8"	3/16"	11
14SCA04B	14SCA04Q	3 - 40	0.4 - 4.5	1100	9.80	249	1.5	0.66	1/8"	3/16"	11
14SCA05B	14SCA05Q	2 - 45	0.2 - 5.1	660	10.20	259	1.6	0.73	1/8"	3/16"	11
14SCA06B	14SCA06Q	2 - 45	0.2 - 5.1	260	10.20	259	1.6	0.74	1/8"	3/16"	11

*Add .63" (16mm) for bit & finder models

** Short housing

General:
90 psi (620kPa) required for maximum rated torque.

Standard Equipment:

Operating instructions & service manual.

Suspension bail.

All torque springs required to meet indicated torque.
Lever Push-to-Start models include kit to convert to lever only. (301409)**Optional Equipment:**

Additional accessories: Pages 16-17

Bits & finders: Page 16

Non-Reversible Kit: 207030

Torque Signal Kit: 301106 (lever only)

Overhose: 207019

Model Number		Torque Range		Free Speed	Length*		Weight		Air Consumption			
Bit & Finder	1/4" Hex Quick Change	3/8" Square Drive	in.-lbs.	Nm	RPM	in.	mm	lbs.	kg	Air Inlet NPT	Min. Hose I.D.	SCFM

Push-to-Start - Push Button Reverse

8RSA-40	8RSA-40BQ	15 - 25	1.7 - 2.8	3200	8.9	241	2.1	1.0	1/4"	1/4"	19
8RSA-30	8RSA-30BQ	15 - 30	1.7 - 3.4	2500	8.9	241	2.1	1.0	1/4"	1/4"	19
8RSA-20	8RSA-20BQ	15 - 40	1.7 - 4.5	1800	8.9	241	2.1	1.0	1/4"	1/4"	19
8RSA-10	8RSA-10BQ	15 - 65	1.7 - 7.3	800	9.6	260	2.4	1.1	1/4"	1/4"	19
	8RSA-7BQ	15 - 75	1.7 - 8.5	550	9.6	260	2.4	1.1	1/4"	1/4"	19
	8RSA-5BQ	15 - 75	1.7 - 8.5	400	9.6	260	2.4	1.1	1/4"	1/4"	19
88RSA-7CQ	88RSA-7C-3	15 - 95	1.7 - 10	550	9.5	241	2.6	1.2	1/4"	1/4"	19
88RSA-5CQ	88RSA-5C-3	15 - 160	1.7 - 18	400	9.5	241	2.6	1.2	1/4"	1/4"	19

Push-to-Start - Non-Reversible

	8SA-20BQ	15 - 42	1.7 - 4.7	2000	8.5	232	2.0	0.9	1/4"	1/4"	19
8SA-10	8SA-10BQ	15 - 67	1.7 - 7.6	1000	9.1	251	2.3	1.0	1/4"	1/4"	19
	8SA-7BQ	15 - 75	1.7 - 8.5	650	9.1	251	2.3	1.0	1/4"	1/4"	19
	88SA-7CQ	15 - 100	1.7 - 11	650	9.1	232	2.5	1.1	1/4"	1/4"	19
	88SA-5CQ	15 - 170	1.7 - 19	500	9.1	232	2.5	1.1	1/4"	1/4"	19

Push and Lever Start - Push Button Reverse

8RSAL-20	8RSAL-20BQ	15 - 38	1.7 - 4.3	1800	10.5	282	2.6	1.2	1/4"	1/4"	19
	8RSAL-10BQ	15 - 60	1.7 - 6.8	800	11.3	302	2.9	1.3	1/4"	1/4"	19
	88RSAL-5CQ	88RSAL-5C-3	15 - 160	1.7 - 18	400	11.1	282	3.1	1.4	1/4"	1/4"

Inline - Push-to-Start - Push Button Reverse

35RSA-20Q		15 - 60	1.7 - 7	1250	9.6	244	2.5	1.1	1/4"	5/16"	24
35RSA-10Q	35RSA-10-3	15 - 110	1.7 - 12	620	10.4	264	2.8	1.2	1/4"	5/16"	24
35RSA-7Q		15 - 160	1.7 - 18	410	10.4	264	2.8	1.2	1/4"	5/16"	24
35RSA-5Q	35RSA-5-3	15 - 180	1.7 - 20	300	10.4	264	2.8	1.2	1/4"	5/16"	24

*Add .63" (16mm) for bit & finder models

General:

90 psi (620kPa) required for maximum rated torque.
Length and weight of finder type tools includes standard length bit & finder.
Weight does not include dead handle.

Standard Equipment:

Operating instructions & service manual

Suspension bail

Dead handle on models above 100 in.lbs. torque cap.

All torque springs required to meet indicated torque

Standard Equipment if Specified:

One bit, finder, and finder spring (bit & finder models)

Grip Sleeve (202346; Push-to-Start models only)

Dead handle (861006)

Optional Equipment:

Additional accessories: Pages 18-19

Bits & finders: Page 18

Torque Springs: Page 19

Pistol Grip Screwdrivers

14 Series Clecomatic Clutch



14 Series

Torque Range: .2 – 14.7 Nm 2.0 – 130 In. Lbs.

- Sliding knob reverse
- External torque adjustment
- Quick change drive
- Convenient top, bottom and rear air inlet (T-handle models)
- Torque signal ports provided
- Trigger and Push & Trigger start



14PTA04Q
"T" Handle

The "T" handle is best for applications that are pre-threaded and the grip on the tool is required to simply guide the tool as the fastener is being tightened.



14PTA04Q
"P" Handle

The "P" handle is best suited for thread cutting fasteners where force must be exerted against the ergonomically shaped "P" handle during the process.



Model Number	Torque Range		Free Speed	Length		Weight		Air Consumption		
	1/4" Quick Change	in.-lbs.	Nm	RPM	in.	mm	lbs.	kg	Air Inlet NPT	Min. Hose I.D.

Push and Trigger Start - T Handle - Clecomatic Clutch

14TCA02Q	4 - 19	0.5 - 2.1	2800	8.4	214	1.8	0.8	1/8"	3/16"	11
14TCA03Q	4 - 26	0.5 - 2.9	1900	8.6	219	1.9	0.8	1/8"	3/16"	11
14TCA04Q	3 - 40	0.3 - 4.5	1100	8.4	214	1.9	0.8	1/8"	3/16"	11
14TCA05Q	2 - 45	0.2 - 5.1	660	8.8	224	1.9	0.9	1/8"	3/16"	11
14TCA06Q	2 - 45	0.2 - 5.1	260	8.8	224	1.9	0.9	1/8"	3/16"	11

Trigger Start - T Handle - Clecomatic Clutch

14TTA02Q	4 - 19	0.5 - 2.1	2800	8.3	211	1.8	0.8	1/8"	3/16"	11
14TTA03Q	4 - 26	0.5 - 2.9	1900	8.5	216	1.9	0.8	1/8"	3/16"	11
14TTA04Q	3 - 40	0.3 - 4.5	1100	8.3	211	1.9	0.8	1/8"	3/16"	11
14TTA05Q	2 - 45	0.2 - 5.1	660	8.7	221	1.9	0.9	1/8"	3/16"	11
14TTA06Q	2 - 45	0.2 - 5.1	260	8.7	221	1.9	0.9	1/8"	3/16"	11
14TTA07Q	21 - 60	2.4 - 6.8	660	10.0	255	2.3	1.0	1/8"	3/16"	11
14TTA10Q	30 - 87	3.4 - 9.8	400	10.2	260	2.3	1.1	1/8"	3/16"	11
14TTA15Q	35 - 130	4.0 - 14.7	250	10.0	255	2.3	1.0	1/8"	3/16"	11

General:

Tool performance rated at 90 psi (620kPa) air pressure.

Dead handle on models above 100 in.-lbs. torque cap.

Non-Reverse Kit: 207030

Standard Equipment:

Operating instructions & service manual

All torque springs required to meet

Torque Springs: Page 17

Suspension bail

indicated torque specification

Torque Signal Kit: 301118

(Trigger w/Clecomatic clutch only)

Overhose: 207107

Additional accessories: Pages 16-17

Push-only Conversion Kit: 301121

Model Number	Torque Range		Free Speed	Length		Weight		Air Consumption		
	1/4" Quick Change	in.-lbs.	Nm	RPM	in.	mm	lbs.	kg	Air Inlet NPT	Min. Hose I.D.

Push and Trigger Start - P Handle - Clecomatic Clutch

14PCA02Q	4 - 19	0.5 - 2.1	2800	8.2	208	1.7	0.8	1/8"	3/16"	11
14PCA03Q	4 - 26	0.5 - 2.9	1900	8.4	213	1.8	0.8	1/8"	3/16"	11
14PCA04Q	3 - 40	0.3 - 4.5	1100	8.2	208	1.7	0.8	1/8"	3/16"	11
14PCA05Q	2 - 45	0.2 - 5.1	660	8.6	218	1.8	0.8	1/8"	3/16"	11
14PCA06Q	2 - 45	0.2 - 5.1	260	8.6	218	1.8	0.8	1/8"	3/16"	11

Trigger Start - P Handle - Clecomatic Clutch

14PTA02Q	4 - 19	0.5 - 2.1	2800	8.1	205	1.7	0.8	1/8"	3/16"	11
14PTA03Q	4 - 26	0.5 - 2.9	1900	8.3	210	1.8	0.8	1/8"	3/16"	11
14PTA04Q	3 - 40	0.3 - 4.5	1100	8.1	205	1.7	0.8	1/8"	3/16"	11
14PTA05Q	2 - 45	0.2 - 5.1	660	8.5	215	1.8	0.9	1/8"	3/16"	11
14PTA06Q	2 - 45	0.2 - 5.1	260	8.5	215	1.8	0.9	1/8"	3/16"	11
14PTA07Q	21 - 60	2.4 - 6.8	660	9.8	249	2.2	1.0	1/8"	3/16"	11
14PTA10Q	30 - 87	3.4 - 9.8	400	10.0	254	2.2	1.0	1/8"	3/16"	11
14PTA15Q	35 - 130	4.0 - 14.7	250	9.8	249	2.2	1.0	1/8"	3/16"	11

General:

Tool performance rated at 90 psi (620kPa) air pressure.

Dead handle on models above 100 in.-lbs. torque cap.

Non-Reverse Kit: 301120

Standard Equipment:

Operating instructions & service manual

All torque springs required to meet

Torque Springs: Page 17

Suspension bail

indicated torque specification

Torque Signal Kit: 301119

(Trigger w/Clecomatic clutch only)

Additional accessories: Pages 16-17

(Trigger w/Clecomatic clutch only)

Pistol Grip Screwdrivers

8, 88 & 35 Series Clecomatic Clutch



8 Series

Torque Range: 1.7 – 85 Nm 15 – 75 In. Lbs.

- Bit and finder and quick change
- Reversible
- Trigger, Push-to-Start and Push & Trigger start



88 Series

Torque Range: 1.7 – 20 Nm 15 – 180 In. Lbs.

- Quick change and square drive
- Reversible
- Trigger and Push & Trigger start



35 Series

Torque Range: 1.7 – 20 Nm 15 – 180 In. Lbs.

- Pistol grip
- Quick change and square drive
- Reversible
- Trigger, Push-to-Start and Push & Trigger start



Model Number		Torque Range		Free Speed	Length		Weight		Air Consumption		
1/4" Hex Quick Change	3/8" Square Drive	in.-lbs.	Nm	RPM	in.	mm	lbs.	kg	Air Inlet NPT	Min. Hose I.D.	SCFM

Push-to-Start - Sliding Knob Reverse

8RSAP-20BQ	15 - 40	1.7 - 4.5	1800	8.5	216	2.8	1.3	1/4"	1/4"	19
8RSAP-10BQ	15 - 65	1.7 - 7.3	800	9.3	235	3.0	1.4	1/4"	1/4"	19
8RSAP-7BQ	15 - 75	1.7 - 8.5	550	9.3	235	3.0	1.4	1/4"	1/4"	19

Push and Trigger Start - Sliding Knob Reverse

8RSAPT-40BQ	15 - 25	1.7 - 2.8	3200	8.5	216	2.8	1.3	1/4"	1/4"	19	
8RSAPT-20BQ	15 - 40	1.7 - 4.5	1800	8.5	216	2.8	1.3	1/4"	1/4"	19	
8RSAPT-10BQ	15 - 65	1.7 - 7.3	800	9.3	235	3.0	1.4	1/4"	1/4"	19	
8RSAPT-7BQ	15 - 75	1.7 - 8.5	550	9.3	235	3.0	1.4	1/4"	1/4"	19	
8RSAPT-5BQ	15 - 75	1.7 - 8.5	400	9.3	235	3.0	1.4	1/4"	1/4"	19	
88RSAPT-7CQ		15 - 95	1.7 - 10	550	9.0	229	3.1	1.4	1/4"	1/4"	19
88RSAPT-5CQ	88RSAPT-5C-3	15 - 160	1.7 - 18	400	9.0	229	3.1	1.4	1/4"	1/4"	19
88RSAPT-2CQ		15 - 180	1.7 - 20	200	9.8	248	3.4	1.5	1/4"	1/4"	19

Trigger Start - Sliding Knob Reverse

8RSATP-30BQ	15 - 30	1.7 - 3.4	2500	8.4	213	2.8	1.3	1/4"	1/4"	19	
8RSATP-20BQ	15 - 40	1.7 - 4.5	1800	8.4	213	2.8	1.3	1/4"	1/4"	19	
8RSATP-10BQ	15 - 65	1.7 - 7.3	800	9.1	232	3.0	1.4	1/4"	1/4"	19	
8RSATP-7BQ	15 - 75	1.7 - 8.5	550	9.1	232	3.0	1.4	1/4"	1/4"	19	
8RSATP-5BQ	15 - 75	1.7 - 8.5	400	9.1	232	3.0	1.4	1/4"	1/4"	19	
88RSATP-7CQ	88RSATP-7C-3	15 - 95	1.7 - 10	550	8.9	225	3.1	1.4	1/4"	1/4"	19
88RSATP-5CQ	88RSATP-5C-3	15 - 160	1.7 - 18	400	8.9	225	3.1	1.4	1/4"	1/4"	19
88RSATP-2CQ	88RSATP-2C-3	15 - 180	1.7 - 20	200	9.6	245	3.4	1.5	1/4"	1/4"	19

General:

Tool performance rated at 90 psi (620kPa).
Weight does not include dead handle

Standard Equipment:

Operating instructions & service manual
Dead handle on all models above 100 in.lbs. torque
All torque springs required to meet indicated torque

Optional Equipment:

Additional accessories: Pages 16-17
Bits & finders: Page 16
Torque Springs: Page 17

Standard Equipment if Specified:

Dead handle (861006)

Model Number		Torque Range		Free Speed	Length		Weight		Air Consumption		
1/4" Hex Quick Change	3/8" Square Drive	in.-lbs.	Nm	RPM	in.	mm	lbs.	kg	Air Inlet NPT	Min. Hose I.D.	SCFM

Push-to-Start - Sliding Knob Reverse

35RSAP-20Q	15 - 60	2 - 7	1550	9.1	232	3.1	1.4	1/4"	5/16"	24
35RSAP-10Q	15 - 110	2 - 12	770	9.9	251	3.4	1.5	1/4"	5/16"	24
35RSAP-7Q	15 - 160	2 - 18	510	9.9	251	3.4	1.5	1/4"	5/16"	24

Push and Trigger Start - Sliding Knob Reverse

35RSAPT-20Q	15 - 60	2 - 7	1500	9.1	232	3.1	1.4	1/4"	5/16"	24
35RSAPT-10Q	15 - 110	2 - 12	750	9.9	251	3.4	1.5	1/4"	5/16"	24
35RSAPT-7Q	15 - 160	2 - 18	500	9.9	251	3.4	1.5	1/4"	5/16"	24
35RSAPT-5Q	15 - 180	2 - 20	350	9.9	251	3.4	1.5	1/4"	5/16"	24

Trigger Start - Sliding Knob Reverse

35RSATP-20Q	15 - 60	2 - 7	1500	9.0	229	3.1	1.4	1/4"	5/16"	24	
35RSATP-10Q	15 - 110	2 - 12	750	9.8	248	3.4	1.5	1/4"	5/16"	24	
35RSATP-7Q	15 - 160	2 - 18	500	9.8	248	3.4	1.5	1/4"	5/16"	24	
35RSATP-5Q	35RSATP-5-3	15 - 180	2 - 20	350	9.8	248	3.4	1.5	1/4"	5/16"	24

General:

Tool performance rated at 90 psi (620kPa).
Weight does not include dead handle

Standard Equipment:

Operating instructions & service manual
Dead handle on all models above 100 in.lbs. torque
All torque springs required to meet indicated torque

Standard Equipment if Specified:

Dead handle (861006)

Optional Equipment:
Additional accessories: Pages 16-17
Torque Springs: Page 17

Screwdrivers

14 & 8 Series Stall



14 & 8 Series Stall

Torque Range: 2.1 – 12.4 Nm 19 – 110 In. Lbs.

- Pistol
- 1/4" hex quick change drive
- Trigger start
- Convenient top, bottom and rear air inlet (14 Series T-handle models)
- "P" and "T" style handles (14 series)
- Sliding knob reverse (8 & 14 series)
- Push button reverse (8 series)



Model Number	Torque Range		Free Speed	Length		Weight		Air Consumption		
	in.-lbs.	Nm		RPM	in.	mm	lbs.	kg	Air Inlet NPT	Min. Hose I.D.
Trigger Start - T Handle - Sliding Knob Reverse										
14TTS02Q	19	2.1	2800	6.5	166	1.6	0.7	1/8"	3/16"	11
14TTS03Q	27	3.1	1900	6.8	171	1.6	0.7	1/8"	3/16"	11
14TTS04Q	40	4.5	1100	6.5	166	1.6	0.7	1/8"	3/16"	11
14TTS05Q	45	5.1	660	6.9	175	1.8	0.8	1/8"	3/16"	11
8RNP-20BQ	44	5.0	1800	5.4	137	2.1	1.0	1/4"	1/4"	19
8RNP-10BQ	70	7.9	800	6.1	156	2.4	1.1	1/4"	1/4"	19
Trigger Start - P Handle - Sliding Knob Reverse										
14PTSO2Q	19	2.1	2800	6.3	161	1.5	0.7	1/8"	3/16"	11
14PTSO3Q	27	3.1	1900	6.5	166	1.5	0.7	1/8"	3/16"	11
14PTSO4Q	40	4.5	1100	6.3	161	1.5	0.7	1/8"	3/16"	11
14PTSO5Q	45	5.1	660	6.7	170	1.7	0.8	1/8"	3/16"	11
Trigger Start - Pistol Grip - Push Button Reverse										
8RNO-20BQ	44	5.0	1800	6.0	152	2.0	0.9	1/4"	1/4"	19
8RNO-10BQ	70	7.9	800	6.8	171	2.3	1.0	1/4"	1/4"	19
8RNO-7BQ	110	12.4	550	6.8	171	2.3	1.0	1/4"	1/4"	19

General:

Tool performance rated at 90 psi (620kPa).

Standard Equipment:

Operating instructions & service manual

Suspension bail

All torque springs required to meet indicated torque

Dead handle on all models above 100 in.lbs. torque

Standard Equipment if Specified:

Dead handle (861006; 8 series models)

Optional Equipment:

Additional accessories: Pages 22-24

Bits: Page 22

Non-Reverse Kit:


14 series T Handle: 207030

14 series P Handle: 301120


Overhose:

14 series T Handle: 207107


Cleco 2 Series

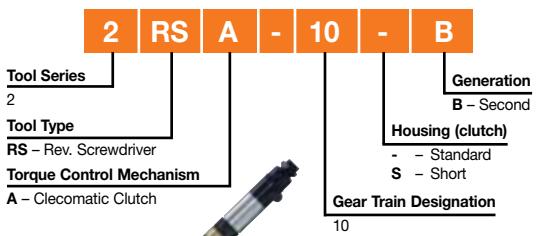


Cleco 14 Series

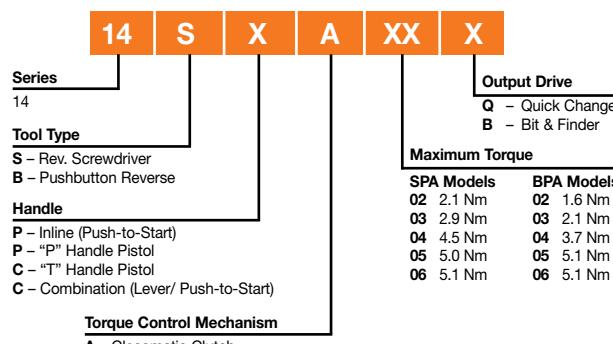


Cleco 8 Series

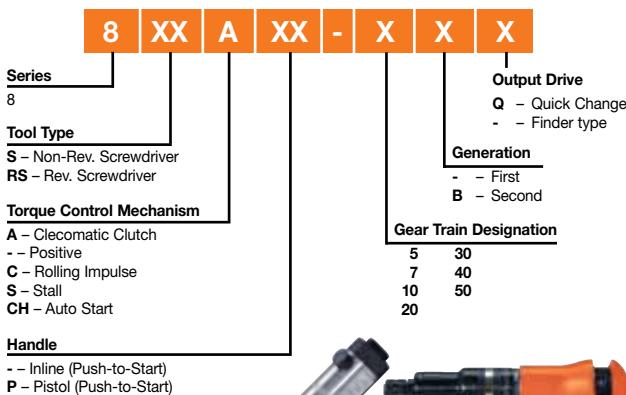

Cleco 88 Series

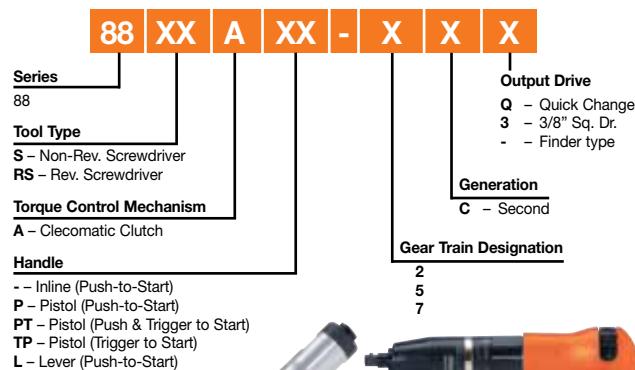


Cleco 35 Series

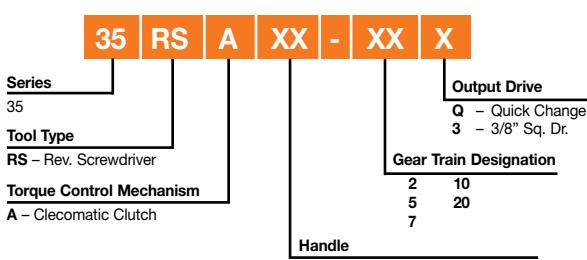

Screwdriver Accessories

Standard and Extended Flat Bits and Finders

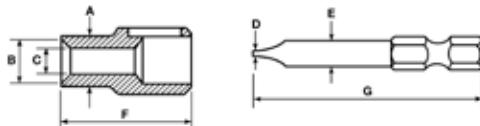

Screw Size	Standard Length (F=1 3/16 in.; G= 1 15/16 in.)		Finder Dimensions (in.)			Bit Dimensions (in.)		Extended Length (F=2 1/4 in.; G= 3 in.)	
	Bit No.	Finder No.	A	B	C	D	E	Bit No.	Finder No.
1F- 2R	849617	847299	.22	.169	.128	.026	.122	849891	847481
2F- 3R	849843	863242	.250	.196	.140	.028	.134	849879	847480
3F- 4R	849618	847300	.285	.228	.160	.032	.154	849892	847482
4F- 5R	849153	847301	.315	.259	.193	.034	.187	849893	847483
5F- 6R	849619	847302	.345	.291	.221	.036	.215	849894	847484
6F- 8R	849154	847303	.380	.323	.256	.038	.250	849895	847485
8F-10R	849620	847294	.445	.386	.281	.042	.275	849896	847486
10F-12R	849155	847304	.530	.431	.318	.046	.312	849897	847487
12F-14R	849156	847305	.590	.513	.366	.050	.360	849898	847488

Phillips Bits and Support Bushings



Phillips Bit Point Size	Bit Body Diameter (in.)	Phillips Bit Part No.	Support Bushing* Part No.
1	3/16	809451	847301
2	1/4	809470	847303
3	5/16	809471	847304

Standard: 1/4 in. Hex Shank Bit – 2 3/4 in. O.A. Length;
Bushing – 1 3/16 in. O.A. Length

1	3/16	809451	847301
2	1/4	809470	847303
3	5/16	809471	847304

Extended: 1/4 in. Hex Shank Bit – 3 1/2 in. O.A. Length;
Bushing – 2 1/4 in. O.A. Length

1	3/16	809453	847483
2	1/4	809473	847485
3	5/16	809474	847487

*Bushing not required on Quick Change models.

Screw Sizes & Types



Screw Size	Approximate Thread Body Diameter (inches)	Maximum Head Diameter (inches)							Width of Slot Max. - Min. (inches)
		Round Head	Flat Head	Oval Head	Fillister Head	Pan Head	Binding Head	Truss Head	
0	.058	.113	.119	.119	.096	.116	–	.131	.023 - .016
1	.071	.138	.146	.146	.118	.142	–	.164	.026 - .019
2	.084	.162	.172	.172	.140	.167	.181	.194	.031 - .023
3	.096	.187	.199	.199	.161	.193	.208	.226	.035 - .027
4	.109	.211	.225	.225	.183	.219	.235	.257	.039 - .031
5	.122	.236	.252	.252	.205	.245	.263	.289	.043 - .035
6	.135	.260	.279	.279	.226	.270	.290	.321	.048 - .039
8	.161	.309	.332	.332	.270	.322	.344	.384	.054 - .045
10	.187	.359	.385	.385	.313	.373	.399	.448	.060 - .050
12	.213	.408	.438	.438	.357	.425	.454	.511	.067 - .056
1/4	.247	.472	.507	.507	.414	.492	.513	.573	.075 - .064
5/16	.309	.590	.635	.635	.518	.615	.641	.698	.084 - .072

Finder Springs

Light Force

844000

Medium Force

865728

Bit Holders and Support Bushings



1/4" Hex Drive Magnetic Bit Holder

Part No. 849325 (2 3/8" O.A. Length)

Magnetic Support Bushing* Part No. 849621

Nomagnetic Support Bushing* Part No. 847245

Quick-Change Bushing Part No. 201203

Fits all finder type tools except No. 2 Screwdriver

*Bushing not required on Quick Change models.

Inline Screwdriver Clutch Torque Springs

Spring Color	Torque Range		Ordering No.
	In. Lbs.	Nm	
2 Series			
Blue	1.5-5	17-.06	202870
Green	8-1	.9-.1	202869
14 Series			
Blue	8-2	.9-.23	203580
Purple	11-2	1.2-.23	204322
Green	19-5	2.1-.6	203579
White	38-10	4.3-1.1	203575
Yellow	45-15	5.1-1.7	203578
8 Series			
Blue	17-7	1.9-.8	869203
Green	55-15	6.2-1.7	867938
Red	75-35	8.5-4	867931
88, 35 Series			
Green	55-15	6-2	202822
Yellow	160-35	18-4	869306
Red	180-60	20-7	869305

Note: Torque listed is immediately after the clutch and does not take into consideration torque multiplication after the clutch, such as additional planetary gears or right angle heads.

207019

Exhaust Overhose & Adapter



Order No.	Description	Used On
207019	Overhose	14 series inline & right angle
207107	Overhose	14 series "T" handle pistol
869204	Adapter	8, 88, 35 series inline, push-to-start

Piped Away Exhaust Hose Adapter



Order No.	Used On
203632	5 series inline
203808	8, 88, 35 series inline p-t-start

Portable Tool Balancers

Part Number	Capacity		Net Weight	Min. Distance Hook to Hook	Length of Working Cable
	Max.	Min.			
200427	2 lbs.	0 lbs.	1.25 lbs.	10.8 in.	5.0 ft.
200428	4 lbs.	2 lbs.	1.25 lbs.	10.8 in.	5.0 ft.
200429	5 lbs.	3 lbs.	1.25 lbs.	10.8 in.	5.0 ft.
PL-12A	12 lbs.	1 lbs.	-	6.8 in.	4.6 ft.
BL-2A	2 lbs.	1 lbs.	1.1 lbs.	10.4 in.	5.2 ft.
BL-4A	4 lbs.	2 lbs.	1.1 lbs.	10.4 in.	5.2 ft.

Dead Handle

Ordering No.	Used On
201770	5 series, 14 series
861006	8, 88, 35 series



861006

Handle Grips

Order No.	Grip Type	Used On
202464	Round inline	2 series
869734	Round inline	5 series
203621	Tri-roundular inline	5 series
202346	Round inline	8 series p-t-start
203762	Pistol grip	5 series
203833	Pistol grip	8, 88, 35 series



Suspension Bails

Order No.	Used On
931962	14 series
869168	2 series
865777	5 series inline & 8, 88 series inline push-to-start
412603	5 series pistol grip & 8, 88 series inline lever start



Torque Signal Kits

Part No.	Tool Used On
301106	14SCA and 14RAA series
301118	14TTA series
301119	14PTA series



PL-12A



Notes



Cleco®

Screwdriver balance arms absorb torque, support weight and improve productivity.

Cleco balance arms are engineered to deliver longer service life using durable components, rugged design and operator-sensitive features.

These arms absorb the torque produced by the screwdriver, eliminating torque reaction to the operator. Balanced by springs or air cylinders, the arm and not the operator supports the weight of the tool. By reducing the fatigue factors, the operator productivity is improved.

Tool movement and placement over the fastener is virtually effortless since most moving parts of the balance arm are mounted on ball bearings. Access to the tool is easily changeable by adjusting the springs or cylinder supporting the forearm.

Arm components and materials are selected for strength and rigidity. Precision aluminum sand castings used in the articulating arm section are light but sturdy.

Over 25 models of the Cleco screwdriver balance arms are available. Air cylinder models are capable of supporting tools weighing up to 10 lbs. (4.5 kg.). Spring models will support tools weighing up to 5 lbs. (2.3 kg.). Both styles have torque capacities of 10 ft. lbs. (13.5 Nm). Arms can be post mounted, wall mounted or mounted on an adjustable height post. Tool holders for all models will accommodate most major brands of air tools...straight and pistol.

Tool Holders

Selecting the proper tool holder for the tool used on Cleco balance arms enhances the ergonomic benefits of the arm. Tool holders allow the tool to swing, swivel and rotate, enabling the operator to work more comfortably and productively.

Standard and extended tool holders are available for parallel balance arms. Both models hold the tool perpendicular to the work, and are ideal for self-tapping and thread forming applications. Tool diameter capacity is up to 1 3/4 inch (45mm).



Manifold tool holders used on SBA and CSBA balance arms suspend the tool from the air inlet. They allow the tool to swing (or swivel when equipped with the optional swivel assembly) for ease of tool movement.

Balance Arms

Air Cylinder & Spring

Cleco®

- Ball bearing construction
- Supports tools weighing up to 5 lbs. (spring models) or up to 10 lbs. (air cylinder models).
- Post, wall, or adjustable height post mounting
- Single or parallel arms

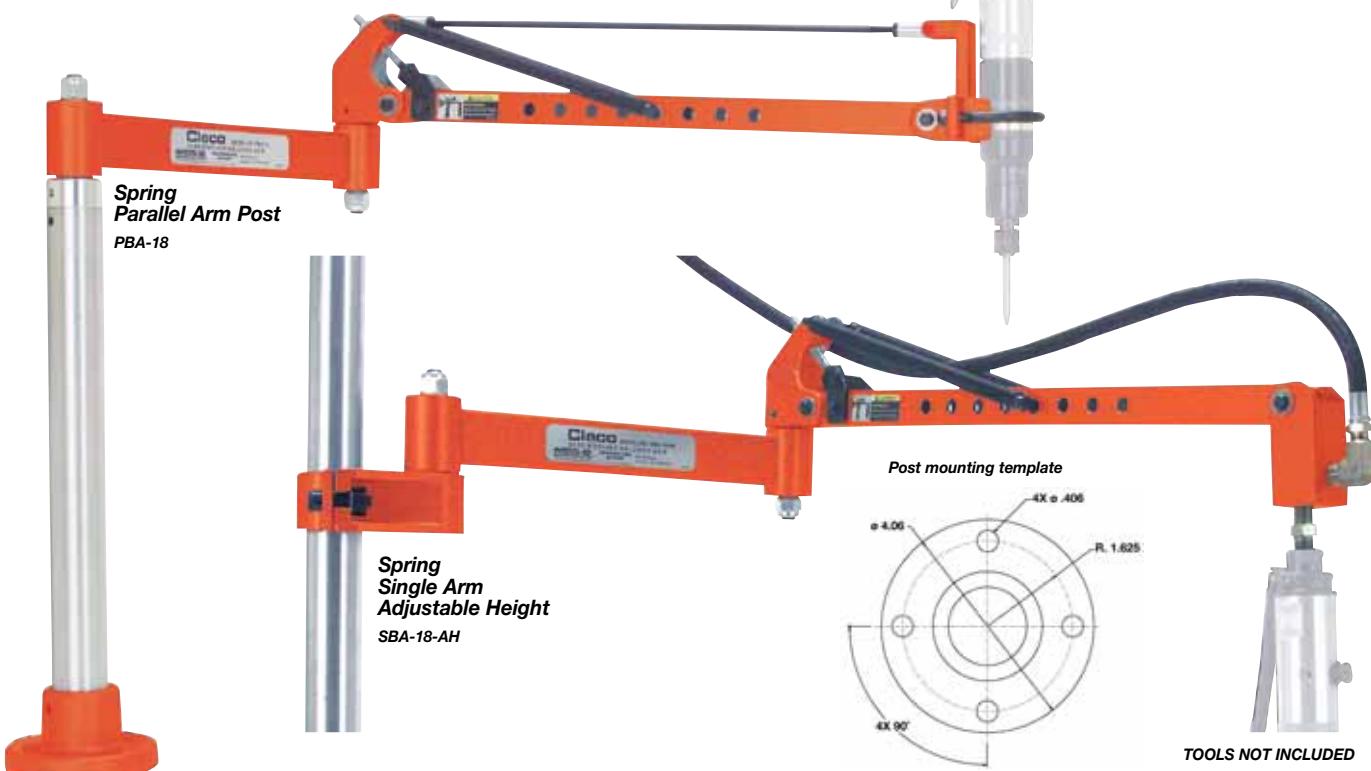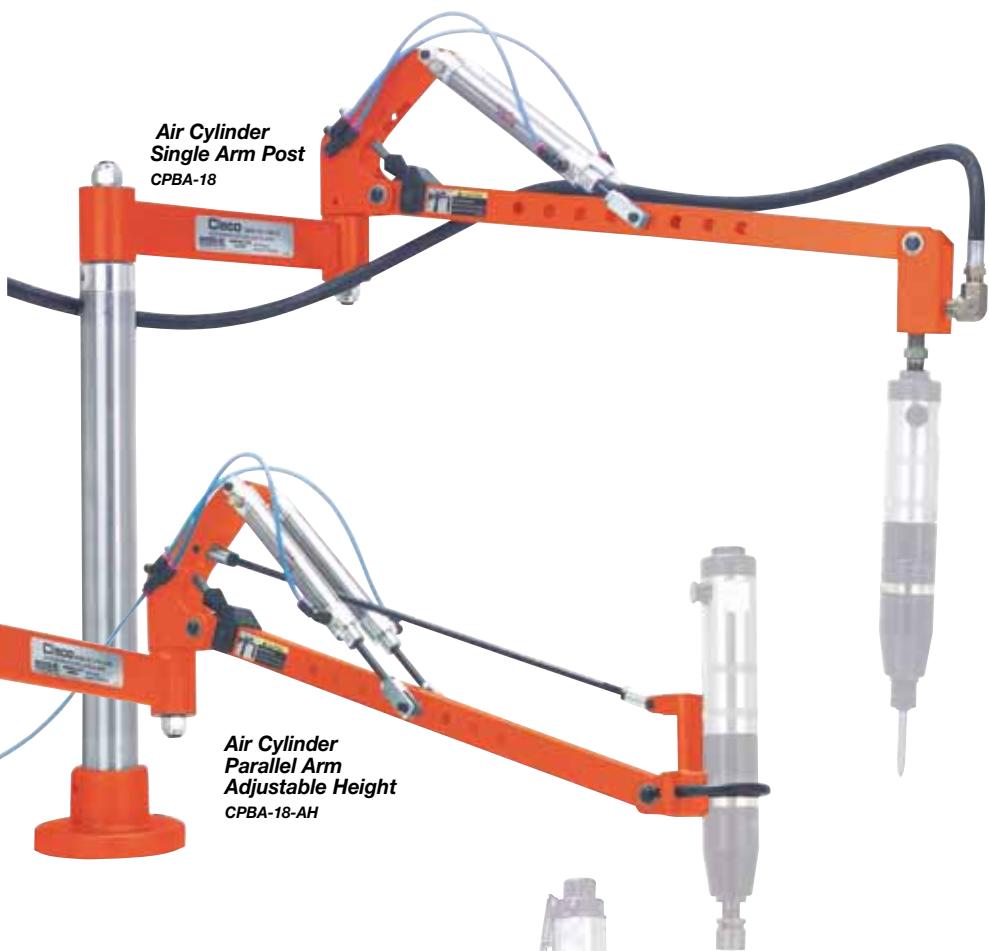

Single Arms		Parallel Arms		Dimensions									
Model No.	Ordering No.	Model No.	Ordering No.	A		B		C		D			
				in.	mm	in.	mm	in.	mm	in.	mm		
Air Cylinder Models													
CSBA18	520160	CPBA-18	520170	12	305	18	457	18	457	-	-		
CSBA-24	520200			12	305	24	610	18	457	-	-		
CSBA-30	520201	CPBA-30	520203	12	305	30	762	18	457	-	-		
CSBA-12-AH	520165	CPBA-12-AH	520178	12	305	12	305	-	-	30	762		
CSBA-18-AH	520162	CPBA-18-AH	520172	12	305	18	457	-	-	30	762		
CSBA-30-AH	520167	CPBA-30-AH	520175	12	305	30	762	-	-	30	762		
		CPBA-30-WM	520207	12	305	30	762	-	-	-	-		

AH = Adjustable Height
WM = Wall Mounted
Tool weight capacity: 10 lbs. (4.6 kg)
Torque capacity: 10 ft. lbs. (13.5 Nm)

Standard Equipment
Operating Instructions and Service Manual.
Regulator for Air Cylinders.
Threaded Nipples for CSBA Models
1/4 NPT Hex Nipple: 204032
1/4 NPT x 1/8 NPT Hex Reducer
Nipple: 204137


Optional Equipment
Additional accessories: See page 28.

Single Arms		Parallel Arms		Dimensions									
Model No.	Ordering No.	Model No.	Ordering No.	A		B		C		D			
				in.	mm	in.	mm	in.	mm	in.	mm		
Spring Models													
SBA-12	520001	PBA-12	520007	12	305	12	305	18	457	-	-		
SBA-18	520004	PBA-18	520010	12	305	18	457	18	457	-	-		
		PBA-24	520045	12	305	24	610	18	457	-	-		
SBA-12-AH	520003	PBA-12-AH	520009	12	305	12	305	-	-	30	762		
SBA-18-AH	520006	PBA-18-AH	520012	12	305	18	457	-	-	30	762		
SBA-24-AH	520110	PBA-24-AH	520047	12	305	24	610	-	-	30	762		
SBA-30-AH	520044	PBA-30-AH	520050	12	305	30	762	-	-	30	762		
		PBA-18-18-AH	520036	18	457	18	305	-	-	30	762		
		PBA-12-WM	520008	12	305	12	305	-	-	-	-		
SBA-30-WM	520043			12	305	30	762	-	-	-	-		

AH = Adjustable Height
WM = Wall Mounted
Tool weight capacity: 5 lbs. (2.3 kg)
Torque capacity: 10 ft. lbs. (13.5 Nm)

Standard Equipment
Operating Instructions and Service Manual.
Threaded Nipples for SBA Models
1/4 NPT Hex Nipple: 204032
1/4 NPT x 1/8 NPT Hex Reducer
Nipple: 204137

Optional Equipment
Additional accessories: See page 22.

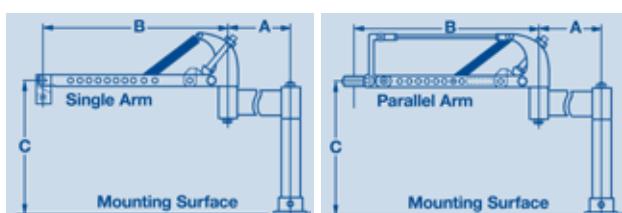


Balance Arm Operating Envelope										
MODEL	R1 MAX	R1 MIN	R2 MAX	R2 MIN	H MAX	H MIN				
	in.	mm	in.	mm	in.	mm	in.	mm	in.	
SBA-12	24	610	2	51	18	457	8	203	15	381
SBA-18	30	762	6	152	20	508	7	178	15	381
PBA-12	26	660	3	76	20	508	7	178	17	432
PBA-18	32	813	8	203	22	559	6	152	17	432
									2	51

XX BA - XX - XX - XX
Series
CS – Air cylinder, single arm
S – Spring, single arm
CP – Air cylinder, parallel arm
P – Spring, parallel arm
Tool Type
BA – Balance Arm

Arm Extension
12" 24"
18" 30"
(12" unless specified)

Mount
- Post
AH – Adjustable Height
WM – Wall Mount

Adjustable Arm Extension
12" 24"
18" 30"

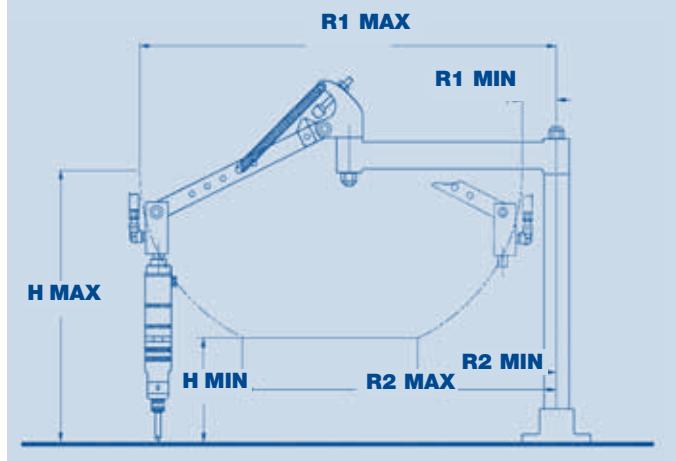


Balance Arms

Accessories

Single Arm Tool Holders

Part Number	Description
201690*	Manifold tool holder
201601*	Swivel manifold tool holder



*Use of 201601 requires 201690.

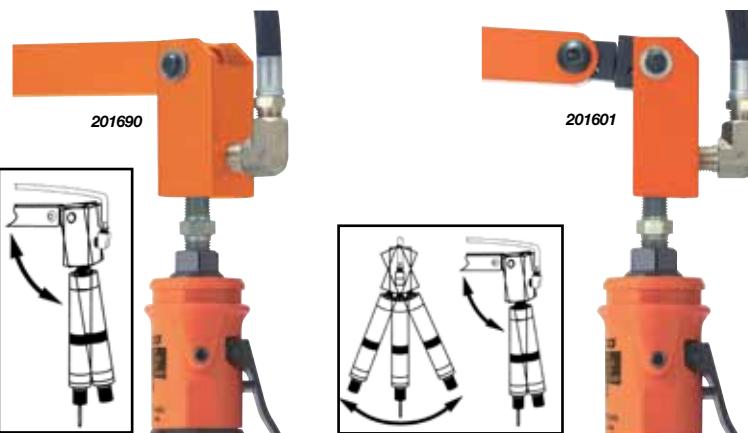

TOOLS NOT INCLUDED.

Parallel Arm Tool Holders

Part Number	Description
201675	Parallel tool holder
204167	Extended parallel tool holder
201607	Swivel tool holder (small)
201608	Swivel tool holder (large)

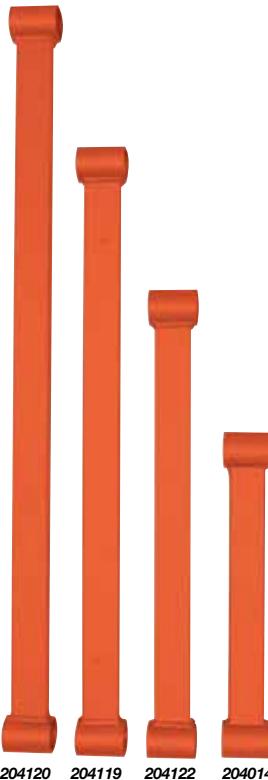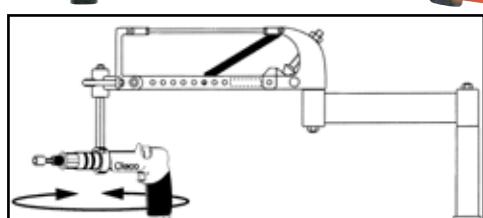

Articulating Arm Extensions


Part Number	Length (inches)
204014	12
204122	18
204119	24
204120	30

Conversion Kits for Cleco Screwdriver Balance Arms

To Convert Balance Arms From	To	Part No.
SBA-12	PBA-12*	521041
SBA-18	PBA-18*	521042
Spring	Cylinder	201606
SBA or PBA Standard Duty	SBA or PBA Heavy Duty**	521060

* Conversion kits for -24 and -30 models are available upon request.

** Has four springs to support heavier tools or longer arms.

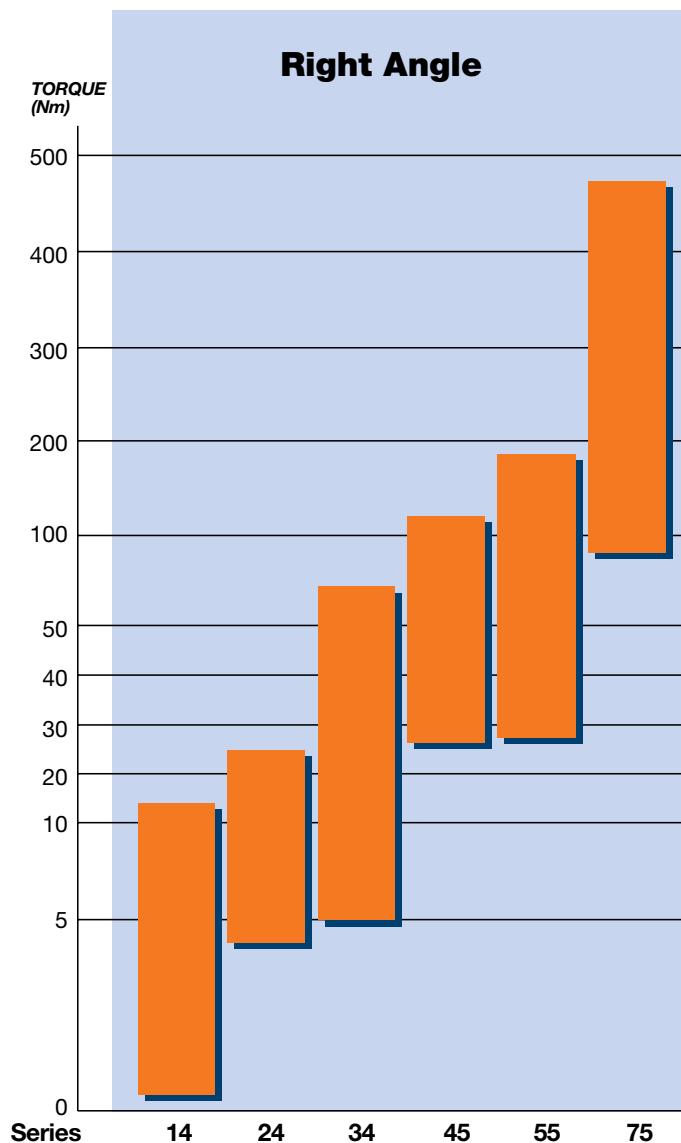

Cleco®

Selecting Your Cleco Nutrunner

Cleco offers over 500 nutrunners, most of which can be equipped with a wide variety of drive options. This generates over 3,000 different nutrunner combinations, allowing the exact tool with precise features to be chosen for specific job applications.

The following items should be considered before selecting the tool: ergonomic factors associated with the man/tool/task relationship, torque and speed requirements, tool and fastener accessibility, fastener joint variations, operator skill level and air supply.

Tool performance can be affected by air supply. Plant air line pressure to the tool will vary widely due to several factors: distance of tool from compressor; size of transmission lines, air drops, manifolds, hose length and diameter, and fittings. All power tool specifications are based on the tool receiving air at 90 p.s.i.g. (6.2 bar) with adequate air flow volume while the tool is running.

Clean Operation



Many Cleco angle nutrunners are equipped with oilless blades. This is a very important feature where a clean assembly operation is critical.



Angle Nutrunners

Clecomatic Nutrunners

Clecomatic nutrunners shut off the instant the clutch reaches its adjustable preset torque. This action provides an accurate method of controlling torque without sacrificing tool speed.

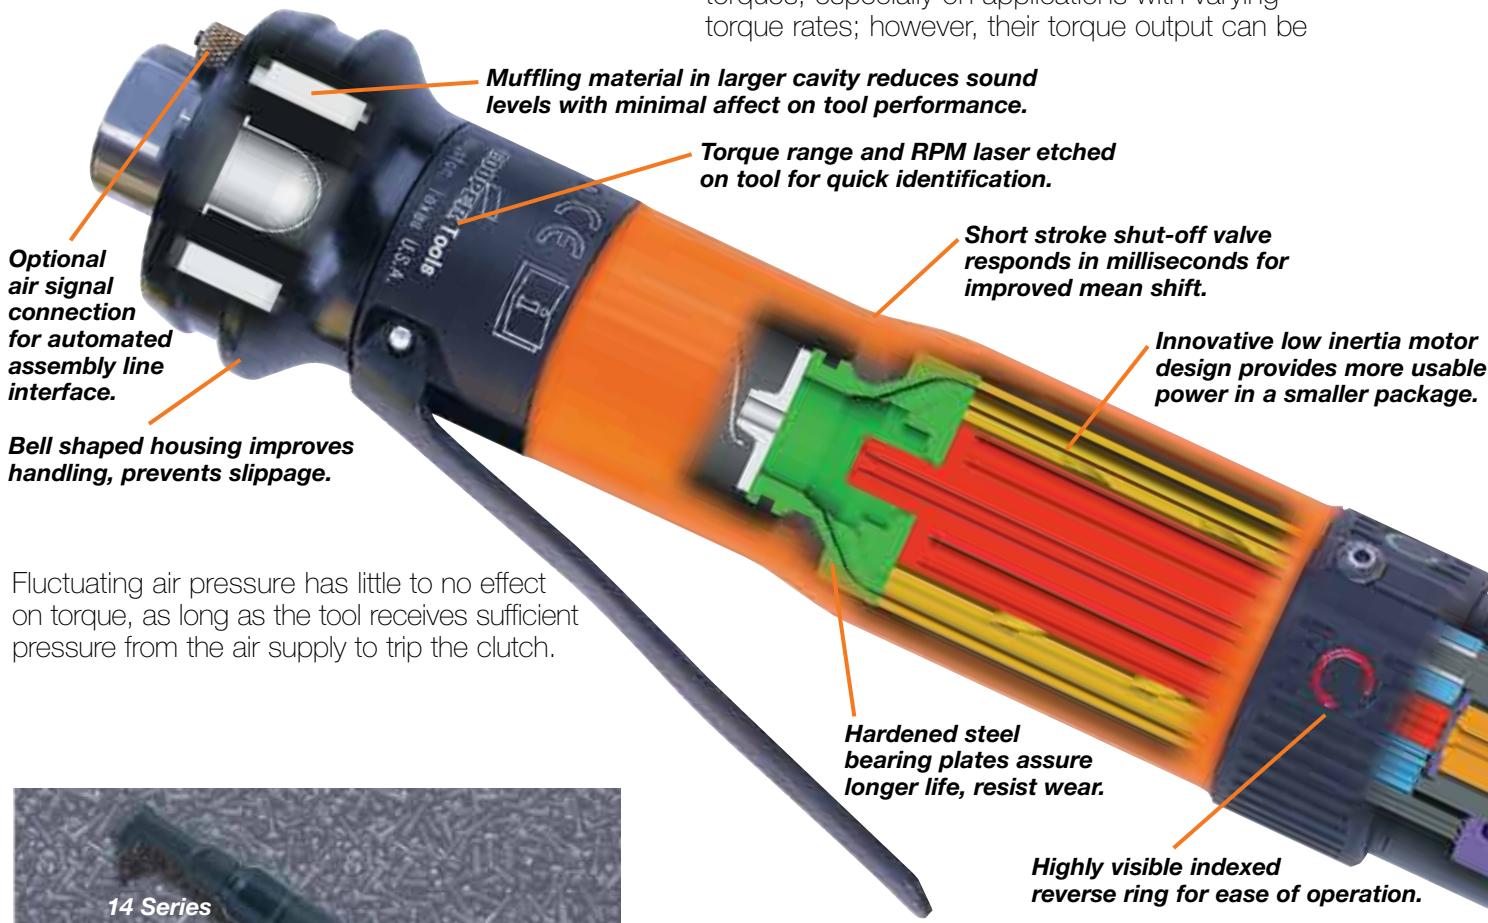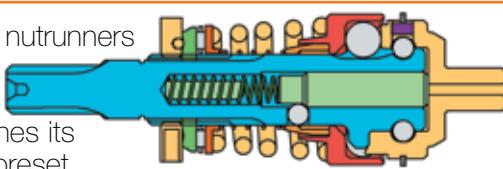

Stall Nutrunners

Stall-type nutrunners consist of an air motor connected to the output spindle by planetary gearing and angle heads. In operation, the tool runs down the fastener until the torque resistance in the fastener causes the tool to stall. When the tool stalls, the throttle is released by the operator and the tool is removed. Stall-type tools can produce accurate torques, especially on applications with varying torque rates; however, their torque output can be

easily influenced by the operator and by fluctuations in the air line pressure. Operators should be instructed to allow the tool to stall before releasing the throttle and to avoid pulling or wrenching the tool after it stalls.

The Cleco Right Angle Solution

The Cleco 14, 24 and 34 series pneumatic nutrunners are the most recent additions to our line of smaller, lighter and faster tools. These powerful right angle clutch tools cover a wide torque range from .5 to 68 NM. We continue to drive our line into the best power to weight ratio of any other tool in the market, in a relentless effort to offer the most performance, the highest level of accuracy and the greatest flexibility in its class of pneumatic tools.

We also design our tools to offer you reduced energy costs, longer operating life, fewer replacement parts and lower service costs.


Performance

The Cleco 24 and 34 series right angle nutrunners incorporate an innovative motor design that provides more usable power in a smaller package. This design contributes greatly to our smaller, lighter, faster goals and provides the highest power to weight ratio in its class to date.



Flexibility

Cleco nutrunners come with an externally adjusted and indicated clutch and offer improved ergonomics with a very comfortable handle area. The polymer coated angle heads on the 24 and 34 series reduce in-system damage. These durable heads are splined to allow indexing for better position. The operator will appreciate a quieter tool thanks to the composite exhaust deflector which also allows the exhaust to be efficiently piped away for even further reduced noise levels. These noted improvements are geared towards enhancing the tools positive operational features while reducing operator fatigue.

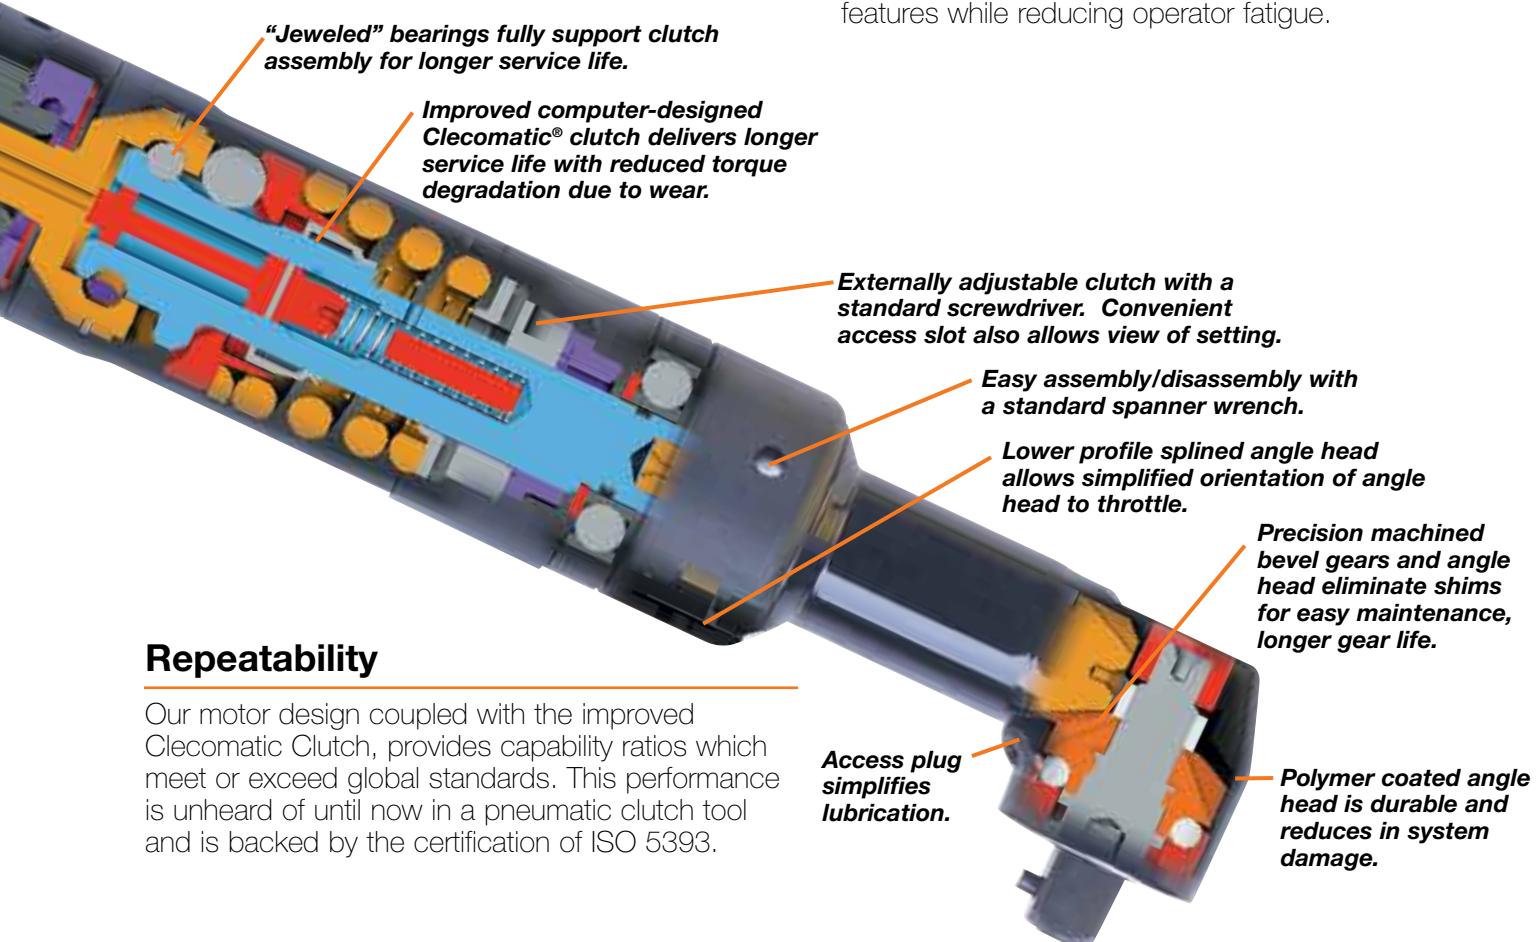

Repeatability

Our motor design coupled with the improved Clecomatic Clutch, provides capability ratios which meet or exceed global standards. This performance is unheard of until now in a pneumatic clutch tool and is backed by the certification of ISO 5393.

Angle Nutrunners

14, 24 & 34 Series Clecomatic Clutch



14 Series

Torque Range:

0.5 – 11 Nm 4.0 – 100 In. Lbs.

- External torque adjustment
- Sliding knob reverse
- 1/4" & 3/8" square drive



24 Series

Torque Range:

4.0 – 23 Nm 3.0 – 17 Ft. Lbs.

- External torque adjustment
- 3/8" square drive
- Indexable anglehead
- One torque spring to meet specified torque
- Oilless blades 🔥

34 Series

Torque Range:

8.0 – 75 Nm 4.0 – 55 Ft. Lbs.

- External torque adjustment
- 3/8" and 1/2" square drive
- Indexable anglehead
- One torque spring to meet specified torque
- Oilless blades 🔥

Model Number Example

24	R	A	A	23	A	M	3
Series							
14							
24							
34							
Rotation							
R-Reversible							
Tool Style							
A - Right Angle							
Torque Control							
A - Clecomatic							
S - Stall							
Maximum Torque Nm							
(Rounded to the nearest Nm)							
Angle Head Size							
L - Light Duty							
M - Medium Duty							
H - Heavy Duty							
X - Extra Heavy Duty							
Z - Super Heavy Duty							
Tool Termination							
A Angle head							

Model Number		Torque Range*		Free Speed	Length		Weight		Head Height		Side to Center		Air Consumption		
3/8" Sq. Dr.	1/2" Sq. Dr.	ft.-lbs.	Nm	RPM	in.	mm	lbs.	kg	in.	mm	in.	mm	Air Inlet NPT	Min. Hose I.D.	SCFM

14 Series - Reversible - Clecomatic Clutch

14RAA02AM2		4 - 19	.5 - 2.1	2400	11.68	297	1.7	0.77	1.06	27	0.36	9	1/8"	3/16"	11
14RAA02AH2	14RAA02AH3	4 - 21	.5 - 2.4	2100	12.11	308	1.8	0.82	1.19	30	0.50	13	1/8"	3/16"	11
14RAA03AL2		4 - 25	.5 - 2.8	570	12.04	306	1.8	0.82	0.94	24	0.31	8	1/8"	3/16"	11
14RAA03AM2		4 - 27	.5 - 3.0	1650	11.88	302	1.8	0.82	1.06	27	0.36	9	1/8"	3/16"	11
14RAA03AH2	14RAA03AH3	4 - 30	.5 - 3.4	1450	12.31	313	1.9	0.86	1.19	30	0.50	13	1/8"	3/16"	11
14RAA04AM2		4 - 43	.5 - 4.8	950	11.68	297	1.7	0.77	1.06	27	0.36	9	1/8"	3/16"	11
14RAA05AM2		4 - 50	.5 - 5.7	570	12.08	307	1.8	0.82	1.06	27	0.36	9	1/8"	3/16"	11
14RAA06AH2*	14RAA06AH3	4 - 53	.5 - 6.0	850	12.11	308	1.8	0.82	1.19	30	0.50	13	1/8"	3/16"	11
14RAA07AH2*	14RAA07AH3	4 - 60	.5 - 6.8	500	12.51	318	1.9	0.86	1.19	30	0.50	13	1/8"	3/16"	11
14RAA09AH2*	14RAA09AH3	10 - 75	1.1 - 8.5	500	13.39	340	2.1	0.95	1.19	30	0.50	13	1/8"	3/16"	11
14RAA11AH2*	14RAA11AH3	10 - 100	1.1 - 11	340	13.59	345	2.2	1.00	1.19	30	0.50	13	1/8"	3/16"	11
14RAA12AH2*	14RAA12AH3	10 - 100	1.1 - 11	200	13.39	340	2.1	0.95	1.19	30	0.50	13	1/8"	3/16"	11

*AH2 head max torque 50 in. lbs.

General:

Tool performance rated at 90 psi (620kPa) air pressure.

Standard Equipment:Operating instructions & service manual.
Suspension bail.

All torque springs required to meet indicated torque specification.

Optional Equipment:

Additional accessories: Page 44

Non-Reverse Kit: 207030

Torque Signal Kit: 301106 (Clecomatic clutch only)

Overhose: 207019

Quick Change and 1/4" magnetic hex outputs available on AH3 models only.

Quick Change: Change AH3 to AHQ

1/4" Magnetic Hex: Change AH3 to AHM

Model Number		Torque Range		Free Speed	Length		Weight		Head Height		Side to Center		Air Consumption		
3/8" Sq. Dr.	1/2" Sq. Dr.	ft.-lbs.	Nm	RPM	in.	mm	lbs.	kg	in.	mm	in.	mm	Air Inlet NPT	Min. Hose I.D.	SCFM

24 Series - Reversible - Clecomatic Clutch

24RAA06AL3		3-4	4-5.5	2200	14.1	358	2.6	1.2	1.08	27.5	.47	12.0	3/8"	5/16"	24
24RAA07AL3		3-5	5-7	1770	14.1	358	2.6	1.2	1.08	27.5	.47	12.0	3/8"	5/16"	24
24RAA11AL3		5-8	7-11	1260	14.1	358	2.6	1.2	1.08	27.5	.47	12.0	3/8"	5/16"	24
24RAA12AM3		5-9	6-12	1200	14.2	360	2.8	1.3	1.16	29.5	.52	13.2	3/8"	5/16"	24
24RAA19AM3		7-14	10-19	700	15.0	380	3.2	1.4	1.16	29.5	.52	13.2	3/8"	5/16"	24
24RAA23AM3		9-17	12-23	600	15.0	380	3.2	1.4	1.16	29.5	.52	13.2	3/8"	5/16"	24

34 Series - Reversible - Clecomatic Clutch

34RAA08AL3		4-6	8-5	2060	14.5	368	2.7	1.2	1.08	27.5	.47	12.0	3/8"	5/16"	34
34RAA11AL3		5-8	7-11	1675	14.5	368	2.7	1.2	1.08	27.5	.47	12.0	3/8"	5/16"	34
34RAA15AM3		7-11	9-15	1185	14.6	370	2.9	1.3	1.16	29.5	.52	13.2	3/8"	5/16"	34
34RAA26AH3		10-19	13-26	710	15.4	390	3.2	1.5	1.22	31.0	.57	14.4	3/8"	5/16"	34
34RAA28AH3		10-20	14-28	580	15.4	390	3.3	1.5	1.22	31.0	.57	14.4	3/8"	5/16"	34
34RAA33AX3		12-24	17-33	545	15.5	393	3.5	1.6	1.36	34.5	.67	17.1	3/8"	5/16"	34
34RAA37AX3		14-27	18-37	480	15.6	397	3.4	1.5	1.36	34.5	.67	17.1	3/8"	5/16"	34
34RAA47AX3		17-35	24-47	385	15.6	397	3.4	1.5	1.36	34.5	.67	17.1	3/8"	5/16"	34
34RAA68AZ3		25-50	34-68	255	16.2	411	3.7	1.7	1.60	41.0	.70	18.0	3/8"	5/16"	34
34RAA75AZ3		28-55	38-75	155	17.0	431	3.9	1.8	1.60	41.0	.70	18.0	3/8"	5/16"	34
34RAA68AZ4	34RAA75AZ4	25-50	34-68	255	16.2	411	3.7	1.7	1.60	41.0	.70	18.0	3/8"	5/16"	34
34RAA75AZ4		28-55	38-75	155	17.0	431	3.9	1.8	1.60	41.0	.70	18.0	3/8"	5/16"	34

General:

Tool performance rated at 90 psi (620kPa) air pressure.

Standard Equipment:

Operating instructions & service manual

Suspension bail

Clutch adjustment tool

Optional Equipment:

Assembly wrench: 201898

Torque signal kit: 301937PT

Non-reversible kit: 204999

Exhaust Overhose: 204978

Additional accessories: Page 44

Angle Nutrunners

45, 55 & 75 Series Clecomatic Clutch



45 Series

Torque Range:
28 – 115 Nm 21 – 85 Ft. Lbs.

- Button start
- Reversible & non-reversible
- External torque adjustment
- 1/2" square drive



55 Series

Torque Range:
32 – 176 Nm 24 – 130 Ft. Lbs.

- Lever start
- Reversible & non-reversible
- External torque adjustment
- Rotating exhaust deflector
- 1/2" square drive



75 Series

Torque Range:
95 – 430 Nm 70 – 320 Ft. Lbs.

- Lever start
- Reversible & non-reversible
- External torque adjustment
- Rotating exhaust deflector
- 1/2" & 3/4" square drive



45, 55 & 75 Model Number Example

55	R	N	A	L	-	XX	X	-	X
Series									
45, 55, 75									
Rotation							Sq. Drive		
N-Non Reversible						3 – 3/8"			
R-Reversible						4 – 1/2"			
Nutrunner						6 – 3/4"			
Torque Control							Angle Head		
A – Cleomatic							P, T, V, X		
-- Stall							Gear Train		
							2, 3, 4, 6, 7, 10		

Model Number	Torque Range		Free Speed	Length		Weight		Head Height		Side to Center		Angle Head	Air Consumption		
	1/2" Sq. Dr.	ft.-lbs.	Nm	RPM	in.	mm	lbs.	kg	in.	mm	in.	mm	Air Inlet NPT	Min. Hose I.D.	SCFM

45 Series – Clecomatic Clutch – Button Start – Reversible

45RNAB-4T-4	21 - 42	28 - 57	300	17.6	448	6.8	3.1	2.0	50	0.9	22	T	3/8"	3/8"	33
45RNAB-3P-4	26 - 52	35 - 71	240	17.5	445	6.4	2.9	1.6	41	0.7	18	P	3/8"	3/8"	33
45RNAB-3T-4	31 - 62	42 - 84	200	17.6	448	6.8	3.1	2.0	50	0.9	22	T	3/8"	3/8"	33
45RNAB-2P-4	34 - 71*	46 - 96*	180	17.5	445	6.4	2.9	1.6	41	0.7	18	P	3/8"	3/8"	33
45RNAB-2T-4	37 - 85	50 - 115	150	17.6	448	6.8	3.1	2.0	50	0.9	22	T	3/8"	3/8"	33

45 Series Clecomatic Clutch – Button Start – Non-Reversible

45NAB-3P-4	28 - 57	38 - 77	300	17.5	445	6.3	2.8	1.6	41	0.7	18	P	3/8"	3/8"	33
------------	---------	---------	-----	------	-----	-----	-----	-----	----	-----	----	---	------	------	----

* Maximum torque of tool exceeds the maximum torque rating for the head, high maintenance should be expected when operated at the upper torque capacity range.

General:
Tool performance rated at 90 psi (620kPa) air pressure.

Standard Equipment:
Operating instructions & service manual.
All torque springs required to meet indicated torque

Optional Equipment:
Additional accessories: Page 44

Model Number	Torque Range		Free Speed	Length		Weight		Head Height		Side to Center		Angle Head	Air Consumption		
	1/2" Sq. Dr.	3/4" Sq. Dr.	ft.-lbs.	Nm	RPM	in.	mm	lbs.	kg	in.	mm		Air Inlet NPT	Min. Hose I.D.	SCFM

55 & 75 Series – Lever Start – Reversible

55RNAL-6T-4	24 - 48	32 - 65	370	19.3	489	7.8	3.5	2.0	50	0.9	22	T	1/2"	1/2"	55
55RNAL-4P-4	26 - 54	35 - 73	330	19.1	486	7.4	3.3	1.6	41	0.7	18	P	1/2"	1/2"	55
55RNAL-4T-4	29 - 64	39 - 87	280	19.3	489	7.8	3.5	2.0	50	0.9	22	T	1/2"	1/2"	55
55RNAL-3P-4	36 - 80*	49 - 109*	220	19.1	486	7.4	3.3	1.6	41	0.7	18	P	1/2"	1/2"	55
55RNAL-3T-4	43 - 95	58 - 129	190	19.3	489	7.8	3.5	2.0	50	0.9	22	T	1/2"	1/2"	55
55RNAL-2T-4	50 - 125*	81 - 170*	140	19.3	489	7.8	3.5	2.0	50	0.9	22	T	1/2"	1/2"	55
75RNAL-3V-4	70 - 140	95 - 190	175	21.9	556	13.3	6.0	2.5	64	1.1	28	V	1/2"	1/2"	70
75RNAL-2V-4	90 - 190*	122 - 255*	130	21.9	556	13.3	6.0	2.5	64	1.1	28	V	1/2"	1/2"	70
75RNAL-3X-6	110 - 225	150 - 305	110	22.6	575	15.0	6.8	2.8	70	1.4	37	X	1/2"	1/2"	70
75RNAL-2X-6	150 - 305	203 - 410	80	22.6	575	15.0	6.8	2.8	70	1.4	37	X	1/2"	1/2"	70

55 & 75 Series – Lever Start – Non-Reversible

55NAL-4P-4	28 - 57	38 - 77	480	19.1	486	7.3	3.3	1.6	41	72.0	18	P	1/2"	1/2"	55
55NAL-4T-4	33 - 69	39 - 93	400	19.3	489	7.6	3.5	2.0	50	0.9	22	T	1/2"	1/2"	55
55NAL-3P-4	39 - 84*	49 - 114*	320	19.1	486	7.3	3.3	1.6	41	72.0	18	P	1/2"	1/2"	55
55NAL-3T-4	45 - 100	58 - 136	270	19.3	489	7.6	3.5	2.0	50	0.9	22	T	1/2"	1/2"	55
55NAL-2T-4	55 - 130*	68 - 176*	200	19.3	489	7.6	3.5	2.0	50	0.9	22	T	1/2"	1/2"	55
75NAL-2V-4	100 - 200	135 - 271	210	21.9	556	13.0	5.9	2.5	64	1.1	28	V	1/2"	1/2"	70
75NAL-2X-6	160 - 320	215 - 430	130	22.6	575	14.8	6.7	2.8	70	1.4	37	X	1/2"	1/2"	70

* Maximum torque of tool exceeds the maximum torque rating for the head, high maintenance should be expected when operated at the upper torque capacity range.

Standard Equipment:
Operating instructions & service manual
Torque Reaction Mounting Plate (75 series)
All torque springs required to meet indicated torque

Optional Equipment:
Additional accessories: Page 44

General:
Tool performance rated at 90 psi (620kPa) air pressure.

Angle Nutrunners

14, 24, 34, 45, 55 & 75 Series Stall – Reversible & Non-Reversible



14 Series Reversible

Torque Range:

3.2 – 6.2 Nm 2.3 – 4.6 Ft. Lbs.

- Lever start
- Sliding knob reverse



24 Series Reversible

Torque Range:

13 Nm 9.6 Ft. Lbs.

- Lever start
- Twist ring reverse



34 Series Reversible

Torque Range:

11 - 36 Nm 8.1 - 26 Ft. Lbs.

- Lever start
- Twist ring reverse



45 Series Reversible & Non-Reversible

Torque Range:

62 - 125 Nm 46 - 92 Ft. Lbs.

- Button start
- Twist ring reverse



55 Series Reversible & Non-Reversible

Torque Range:

56 - 203 Nm 41 - 150 Ft. Lbs.

- Lever start
- Reversible & non-reversible

Torque Range:

210 - 475 Nm 155 - 350 Ft. Lbs.

- Lever start
- Reversible & non-reversible

Model Number	Max. Torque		Square Drive	Free Speed	Length		Weight		Head Height		Side to Center		Air Consumption		
	ft.-lbs.	Nm	in.	RPM	in.	mm	lbs.	kg	in.	mm	in.	mm	Air Inlet NPT	Min. Hose I.D.	SCFM

14 Series – Reversible – Stall

14RAS03AM2	2.3	3.2	1/4	1700	11.4	289	1.3	0.6	1.1	27	0.4	9	1/8"	3/16"	11
14RAS04AH2	2.7*	3.6*	1/4	1250	11.2	284	1.4	0.6	1.2	30	0.5	13	1/8"	3/16"	11
14RAS05AM2	3.8	5.2	1/4	850	10.6	268	1.2	0.5	1.1	27	0.4	9	1/8"	3/16"	11
14RAS06AH3	4.6	6.2	3/8	880	11.0	279	1.3	0.6	1.2	30	0.5	13	1/8"	3/16"	11

45 Series – Reversible – Stall

45RNB-4T-4	46	62	1/2	310	15.1	384	5.5	2.5	2.0	50	0.9	22	3/8"	3/8"	33
45RNB-3P-4	58	79	1/2	250	15.0	381	5.1	2.3	1.6	41	0.7	18	3/8"	3/8"	33
45RNB-3T-4	69	94	1/2	210	15.1	384	5.5	2.5	2.0	50	0.9	22	3/8"	3/8"	33
45RNB-2T-4	92	125	1/2	160	15.1	384	5.5	2.5	2.0	50	0.9	22	3/8"	3/8"	33

24, 34, 55 & 75 Series – Reversible – Stall

34RAS11AL3	8.1	11	3/8	1675	12.0	305	2.1	1.0	1.1	28	0.5	12	3/8"	5/16"	34
24RAS13AM3	9.6	13	3/8	1200	11.7	297	2.2	1.0	1.2	30	0.5	13	3/8"	5/16"	24
34RAS28AH3	20	28	3/8	710	12.9	328	2.6	1.2	1.2	31	0.6	14	3/8"	5/16"	34
34RAS36AX3	26	36	3/8	545	13.0	330	2.8	1.3	1.4	35	0.7	17	3/8"	5/16"	34
55RNL-7T-4	41	56	1/2	490	16.1	410	6.1	2.8	2.0	50	0.9	22	1/2"	1/2"	55
55RNL-3T-4	100*	136*	1/2	195	16.8	425	6.5	2.9	2.0	50	0.9	22	1/2"	1/2"	55
55RNL-2T-4	130*	176*	1/2	145	16.8	425	6.5	2.9	2.0	50	0.9	22	1/2"	1/2"	55
75RNL-3V-4	155	210	1/2	190	19.4	492	11.4	5.2	2.5	64	1.1	28	1/2"	1/2"	70
75RNL-3X-6	245	330	3/4	120	20.1	511	13.1	6.0	2.8	70	1.4	37	1/2"	1/2"	70
75RNL-2X-6	325	440	3/4	90	20.1	511	13.1	6.0	2.8	70	1.4	37	1/2"	1/2"	70

* Maximum torque of tool exceeds the maximum torque rating for the head, high maintenance should be expected when operated at the upper torque capacity range.

Standard Equipment:
Operating instructions & service manual
Suspension bail (14 series)
Torque reaction mounting plate (75 series)

Quick Change and 1/4" magnetic hex outputs available on AH3 models only.
Quick Change: Change AH3 to AHQ
1/4" Magnetic Hex: Change AH3 to AHM

General:
Tool performance rated at 90 psi (620kPa) air pressure.

Optional Equipment:
14 Series: Non-Reverse Kit:
Overhose:

24/34 Series: Assembly wrench: 201898
Non-reverse kit 204999
Additional accessories: Page 44

Model Number	Max. Torque		Square Drive	Free Speed	Length		Weight		Head Height		Side to Center		Air Consumption		
	ft.-lbs.	Nm	in.	RPM	in.	mm	lbs.	kg	in.	mm	in.	mm	Air Inlet NPT	Min. Hose I.D.	SCFM

55 & 75 Series Non-Reversible – Stall

55NL-3T-4	110*	149*	1/2	290	16.8	425	6.4	2.9	2.0	50	0.9	22	1/2"	1/2"	55
55NL-2T-4	150*	203*	1/2	210	16.8	425	6.4	2.9	2.0	50	0.9	22	1/2"	1/2"	55
75NL-3V-4	165	225	1/2	300	19.4	492	11.1	5.0	2.5	64	1.1	28	1/2"	1/2"	70
75NL-2V-4	220*	298*	1/2	230	19.4	492	11.1	5.0	2.5	64	1.1	28	1/2"	1/2"	70
75NL-2X-6	350	475	3/4	140	20.1	511	12.9	5.8	2.8	70	1.4	37	1/2"	1/2"	70

* Maximum torque of tool exceeds the maximum torque rating for the head, high maintenance should be expected when operated at the upper torque capacity range.

General:
Tool performance rated at 90 psi (620kPa) air pressure

Standard Equipment:
Operating instructions & service manual
Torque Reaction Mounting Plate (75 series)

Optional Equipment:
Additional accessories: Page 44
Safety Lever: 201638

14, 24, & 34 Model Number Example

24	R	A	A	23	A	M	3	Square Drive	2 – 1/4" (AL only)	Angle Head Size	L – Light Duty	Air Inlet NPT
Series	14, 24, 34	Rotation	R-Reversible	Tool Style	A – Right Angle	Torque Control	A – Clecomatic	S – Stall	3 – 3/8"	P, T, V, X	Gear Train	2, 3, 4, 6, 7, 10
Maximum Torque Nm	(Rounded to the nearest Nm)	Tool Termination	A Angle head						4 – 1/2"			
									6 – 3/4"			

45, 55 & 75 Model Number Example

55	R	N	A	L	-	XX	X	-	X	Sq. Drive
Series	45, 55, 75	Rotation	N-Non Reversible	R-Reversible	Nutrunner	Torque Control	A – Clecomatic	B – Button		
Start Type	L – Lever									

Swingbar Nutrunners



Smaller, Faster, Lighter

For high torque applications where a small tool is necessary, for consistency in clamp load across joint types or for simply eliminating the maintenance needs of an angle tool, the Cleco 64 Series provides the best solution for today's heavy assembly environment.

Benefits of a Swingbar Tool


A swingbar tool includes a reaction bar that freely swings 360°. This allows the reaction bar to be moved to an appropriate bracing point without any disassembly or repositioning of a spline. Once positioned, the reaction bar absorbs the reaction forces of the tool.

Selectork

Output torque from a stall tool is achieved by adjusting the air pressure to the tool. If the tool is

moved from location to location or if other tools requiring full line pressure use the same air line, the tool will require a dedicated air pressure regulator.

The Cleco Selectork feature in the 64 Series tools is a small pressure regulator that takes the place of the standard air inlet bushing and eliminates the need to have a separate pressure regulator installed in the plant floor system. Because of the small size of the Selectork there is a limited pressure adjustment range of from 60 to 90 psi. To order this option on the Cleco 64TTS Swingbar tools replace the "S" in the model number with a "K" (64TTS....to a 64TTK....).

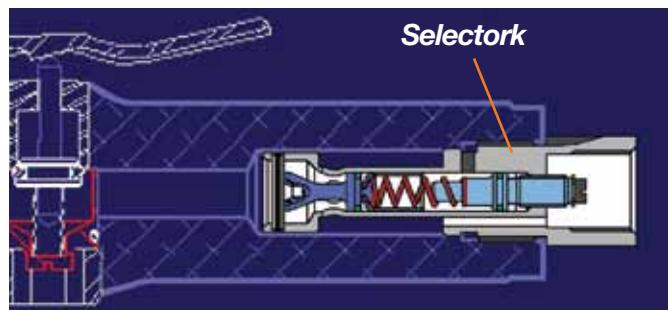



Speed and Torque Tests for the Cleco 64 Series Swingbar Nutrunners



The goal of any fastening application is to maintain a high degree of accuracy while minimizing the length of time required to perform the rundown. The Cleco 64 Series Swingbar Nutrunners utilize a single powerful motor that limits speed shifts and offers a fast and accurate rundown regardless of joint type.

Competitive units with high RPM's quickly drop their speed at threshold resulting in an overall longer rundown period. This gap is multiplied when prevailing torque is present.



To read the graphs below, the orange line represents the tool speed while the blue line represents the torque generated throughout a rundown. Notice the correlation between speed and torque and its overall effect on rundown time.

The swingbar can instantly be positioned to absorb the torque reaction of the tool while maintaining a comfortable position with the trigger hand.

Random Comparison on 120° Joint

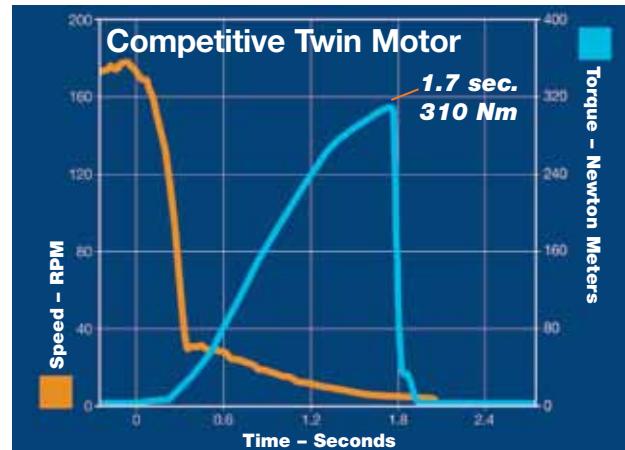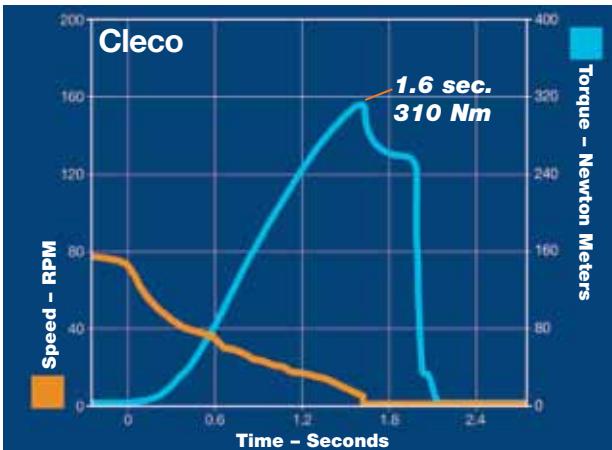

Random Comparison on 720° Joint

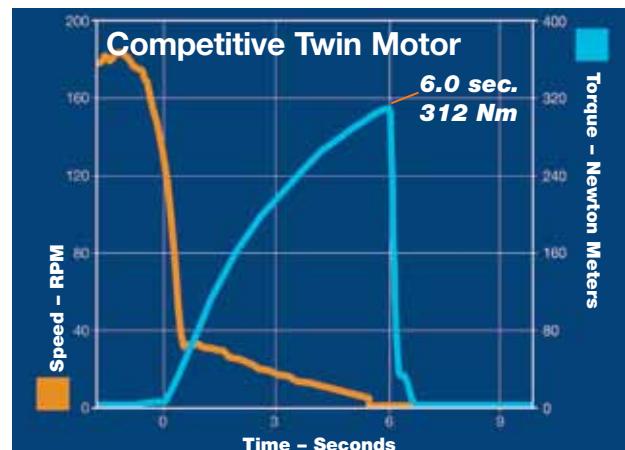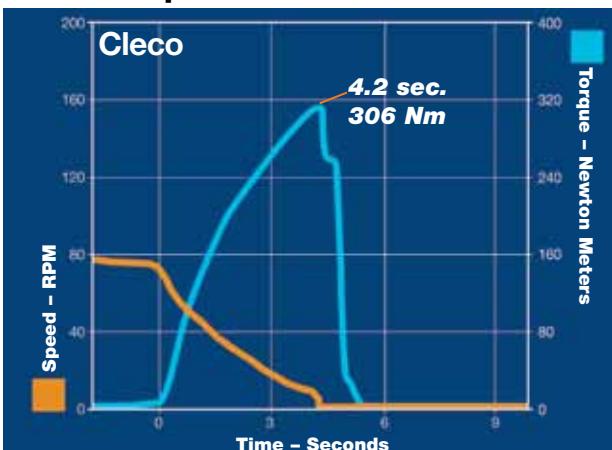

Again the free speed of the Cleco tool is slower, however with its faster tightening speed the overall time is almost 2 seconds faster.

Reaction Bar & Swingbar Nutrunners

Cleco®

45 Series Inline

Torque Range:

14 - 62 Nm 10 - 46 Ft. Lbs.

- Button start
- Twist ring reverse



55 Series Inline

Torque Range:

27 - 91 Nm 20 - 67 Ft. Lbs.

- Lever start
- Twist ring reverse



64 Series Pistol

Torque Range:

34 - 3850 Nm 25 - 2837 Ft. Lbs.

- Trigger start
- Sliding knob reverse
- Swingbar



Selectork 64 Series

Torque Range:

26 - 3850 Nm 19 - 2837 Ft. Lbs.

- Pistol grip
- Reversible
- Swingbar
- Selectork adjustment allows air pressure regulation at the tool for individual performance from a common air line

45 & 55 Model Number Example

55	R	N	A	L	-	X	-	X
Series	45, 55							
Rotation	N-Non Reversible							
	R-Reversible							
Nutrunner								
Torque Control	A - Clecomatic							
	- - Stall							
Start Type	L - Lever							
	B - Button							

64 Model Number Example

64	T	T	S	XX	D	X
Series	64					
Tool Style	T - T-Handle					
	Pistol					
Tool Type	T - "T" Handle Pistol					
Options	S - Stall					
	K - Selectork					
Output Drive	4-1/2"	8	-1"			
	6-3/4"	12	-1 1/2"			
Tool Termination	D - Direct Drive					
Maximum Torque (Nm)						

Model Number	Torque Range		Drive Size	Free Speed RPM	Length		Weight*		Air Consumption		
	ft.-lbs.	Nm			in.	mm	lbs.	kg	Air Inlet NPT	Min. Hose I.D.	SCFM

45 Series – Inline – Clecomatic – Button Start – Twist Ring Reverse

45RNAB-6-3	10 - 16	14 - 22	3/8	740	14.5	368	5.4	2.4	3/8"	3/8"	33
45RNAB-4-3	14 - 22	19 - 30	3/8	560	14.5	368	5.4	2.4	3/8"	3/8"	33
45RNAB-3-3	18 - 33	24 - 45	3/8	370	14.5	368	5.4	2.4	3/8"	3/8"	33
45RNAB-2-4	23 - 46	31 - 62	1/2	270	14.5	368	5.4	2.4	3/8"	3/8"	33

55 Series – Inline – Clecomatic – Lever Start – Twist Ring Reverse

55RNAL-4-4	20 - 34	27 - 46	1/2	560	16.1	410	6.5	3.0	1/2"	1/2"	55
55RNAL-3-4	25 - 51	34 - 69	1/2	370	16.1	410	6.5	3.0	1/2"	1/2"	55
55RNAL-2-4	30 - 67	46 - 91	1/2	270	16.1	410	6.5	3.0	1/2"	1/2"	55

* Weight without reaction bar.

General:

Tool performance rated at 90 psi (620kPa) air pressure

Standard Equipment:Operating instructions & service manual
Aluminum Torque Reaction Bar**Optional Equipment:**Steel Torque Reaction Bar: 869770
Additional accessories: Page 44

Model Number	Torque Range		Drive Size	Free Speed RPM	Length		Weight*		Air Consumption		
	Non-Selectork	Selectork			ft.-lbs.	Nm	in.	mm	lbs.	kg	Air Inlet NPT
									Min. Hose I.D.	SCFM	

Pistol – Trigger Start – Reversible

64TTS34D4	64TTK34D4	19 - 25	26 - 34	1/2"	725	11.5	290.8	6.3	2.9	3/8"	1/2"	60
64TTS44D4	64TTK44D4	24 - 32	33 - 44	1/2"	570	11.5	290.8	6.3	2.9	3/8"	1/2"	60
64TTS55D4	64TTK55D4	30 - 41	41 - 55	1/2"	445	11.5	290.8	6.3	2.9	3/8"	1/2"	60
64TTS75D4	64TTK75D4	41 - 55	56 - 75	1/2"	340	11.5	290.8	6.3	2.9	3/8"	1/2"	60
64TTS90D4	64TTK90D4	50 - 66	68 - 90	1/2"	270	11.5	290.8	6.3	2.9	3/8"	1/2"	60
64TTS110D4	64TTK110D4	61 - 81	83 - 110	1/2"	225	11.5	290.8	6.3	2.9	3/8"	1/2"	60
64TTS125D4	64TTK125D4	69 - 92	94 - 125	1/2"	200	11.5	290.8	6.3	2.9	3/8"	1/2"	60
64TTS140D4	64TTK140D4	77 - 103	105 - 140	1/2"	180	11.5	290.8	6.3	2.9	3/8"	1/2"	60
64TTS150D6	64TTK150D6	83 - 111	113 - 150	3/4"	160	12.5	316.2	8.2	3.7	3/8"	1/2"	60
64TTS175D6	64TTK175D6	97 - 129	131 - 175	3/4"	135	12.5	316.2	8.2	3.7	3/8"	1/2"	60
64TTS205D6	64TTK205D6	113 - 151	154 - 205	3/4"	115	12.5	316.2	8.2	3.7	3/8"	1/2"	60
64TTS255D6	64TTK255D6	141 - 188	191 - 255	3/4"	95	12.5	316.2	8.2	3.7	3/8"	1/2"	60
64TTS345D6	64TTK345D6	191 - 254	259 - 345	3/4"	70	12.5	316.2	8.2	3.7	3/8"	1/2"	60
64TTS425D6	64TTK425D6	235 - 313	319 - 425	3/4"	55	12.5	316.2	8.2	3.7	3/8"	1/2"	60
64TTS570D6	64TTK570D6	315 - 420	428 - 570	3/4"	42	13.0	328.9	8.6	3.9	3/8"	1/2"	60
64TTS640D8	64TTK640D8	354 - 472	480 - 640	1"	32	15.9	404.1	14.5	6.6	3/8"	1/2"	60
64TTS750D8	64TTK750D8	415 - 553	563 - 750	1"	27	15.9	404.1	14.5	6.6	3/8"	1/2"	60
64TTS930D8	64TTK930D8	514 - 686	698 - 930	1"	22	15.9	404.1	14.5	6.6	3/8"	1/2"	60
64TTS1260D8	64TTK1260D8	697 - 929	945 - 1260	1"	16	15.9	404.1	14.5	6.6	3/8"	1/2"	60
64TTS1475D8	64TTK1475D8	816 - 1088	1106 - 1475	1"	14	15.9	404.1	14.5	6.6	3/8"	1/2"	60
64TTS1820D8	64TTK1820D8	1007 - 1342	1365 - 1820	1"	11	15.9	404.1	14.5	6.6	3/8"	1/2"	60
64TTS1985D8	64TTK1985D8	1098 - 1464	1489 - 1985	1"	10	15.9	404.1	14.5	6.6	3/8"	1/2"	60
64TTS3850D12	64TTK3850D12	2128 - 2837	2888 - 3850	1 1/2"	5	21.5	546.1	32.2	14.6	3/8"	1/2"	60

* Weight without reaction bar.

General:

Tool performance rated at 90 psi (620kPa) air pressure.

Standard Equipment:Operating instructions & service manual
Aluminum Torque Reaction Bar**Optional Equipment:**Steel Torque Reaction Bar: 64.....D4 series: 48047128
Additional accessories: Page 44

Flush Socket Nutrunners

Cleomatic Clutch & StallStall

Cleco®

34 Series

Torque Range:
5 – 103 Nm 4 – 76 Ft. Lbs

- External torque adjustment (Cleomatic models)
- Indexable anglehead
- One torque spring to meet specified range
- Oilless blades
- Reversible



X Dimension For Flush Socket

Head	Inches	Millimeters	Socket Size Range
F1	1.54	39	8–15mm
F2	1.69	43	10–15mm
F3	2.32	59	13–21mm

NOTE: Models listed are examples. Use chart on bottom of facing page for specific model required but not listed.

Model Number	Free Speed	Torque		Length		Weight		Anglehead				Air Consumption		
		RPM	ft.-lbs.	Nm	in.	mm	lbs.	kg	Height	Side to Center	Air Inlet	Min. Hose I.D.	SCFM	

Cleomatic - Lever Start - Reversible

34RAA09F1	1825	4-7	5-9	17.0	432	3.7	1.7	1.54	39	0.55	14	3/8"	5/16"	34
34RAA16F1	1055	7-12	9-16	17.0	432	3.7	1.7	1.54	39	0.55	14	3/8"	5/16"	34
34RAA28F1	645	10-20*	14-28*	17.8	452	3.9	1.8	1.54	39	0.55	14	3/8"	5/16"	34
34RAA33F2	540	12-24	17-33	18.8	478	4.7	2.1	1.69	43	0.67	17	3/8"	5/16"	34
34RAA47F2	380	17-35	24-47	19.0	483	5.1	2.3	1.69	43	0.67	17	3/8"	5/16"	34
34RAA53F2	265	17-39	24-53	19.0	483	5.1	2.3	1.69	43	0.67	17	3/8"	5/16"	34
34RAA67F3	265	24-49	33-67	20.5	521	5.8	2.6	2.32	59	0.87	22	3/8"	5/16"	34
34RAA94F3	185	35-69	47-94	20.5	521	5.8	2.6	2.32	59	0.87	22	3/8"	5/16"	34

Stall - Lever Start - Reversible

34RAS10F1	1825	7	10	17.0	432	3.4	1.5	1.54	39	0.55	14	3/8"	5/16"	34
34RAS18F1	1055	13	18	17.0	432	3.4	1.5	1.54	39	0.55	14	3/8"	5/16"	34
34RAS30F1	645	22*	30*	17.8	452	3.5	1.6	1.54	39	0.55	14	3/8"	5/16"	34
34RAS40F2	480	29	40	19.0	483	4.4	2.0	1.69	43	0.67	17	3/8"	5/16"	34
34RAS52F2	380	38	52	19.0	483	4.4	2.0	1.69	43	0.67	17	3/8"	5/16"	34
34RAS58F3	335	43	58	20.5	521	5.5	2.5	2.32	59	0.87	22	3/8"	5/16"	34
34RAS73F3	265	54	73	20.5	521	5.5	2.5	2.32	59	0.87	22	3/8"	5/16"	34
34RAS103F3	185	76	103	20.5	521	5.5	2.5	2.32	59	0.87	22	3/8"	5/16"	34


* Maximum torque of tool exceeds the maximum torque rating for the head, high maintenance should be expected when operated at the upper torque capacity range.

General:
Tool performance rated at 90 psi (620kPa) air pressure.


Standard Equipment:
Operating instructions & service manual
Suspension bail
Exhaust Overhose
Clutch adjustment tool (Cleomatic tools)
Mounting plate (F3 tools)

Optional Equipment:
Assembly wrench: 201898
Torque signal kit: 301937PT
Non-reversible kit: 204999
Mounting plates: F1 tools 57217101 57218103
 F2 tools 43287131


Additional accessories: Page 44

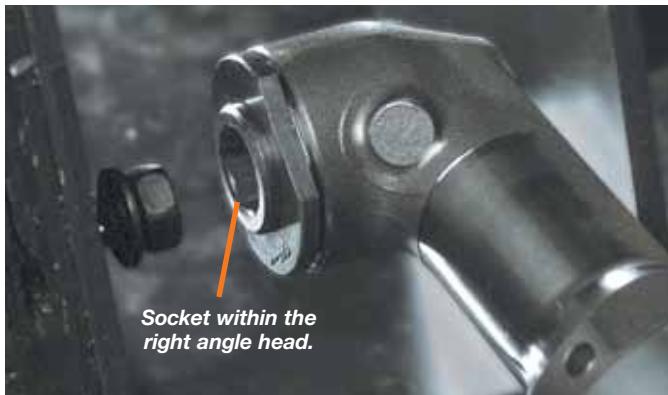

Tight clearance applications, once only accessible by the use of hand tools or crowfoot attachments, can now be tightened by the family of Cleco Flush Socket Pneumatic Tools at a speed that maximizes productivity. Tools equipped with a Clecomatic clutch assure good torque repeatability.

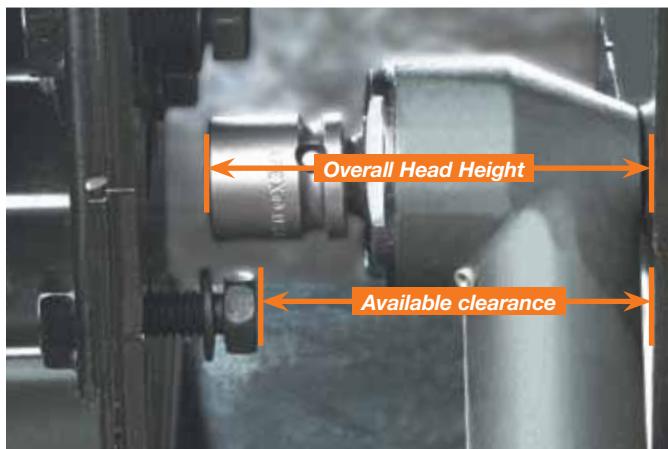

Standard right angle head with square drive and separate socket will not fit on tight clearance applications. The overall head height is greater than the available clearance.

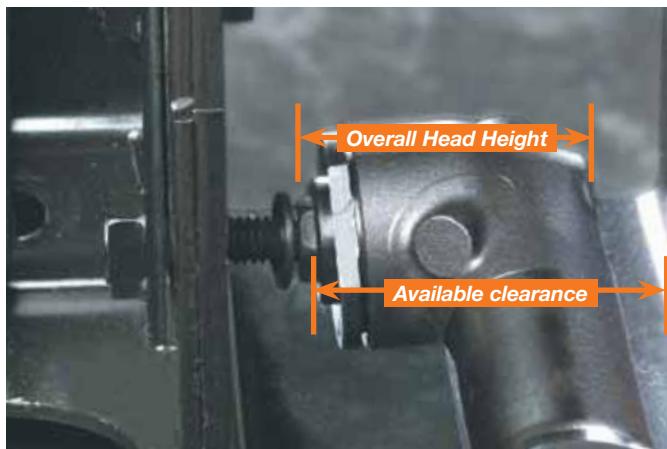

Flush socket tools have plenty of clearance to fit on the same application. Clecomatic flush socket tools tighten with much higher accuracy than tools with crowfoot attachment. The overall head height is less than the available clearance.

Model Number Example

Base Tool

34	R	A	A	16	F1			
Motor	Reversible							
	Tool Style							
	A - Angle							

Control
A - Clutch
S - Stall

Maximum Torque Output

F1 Clutch: 9, 16, 28 Nm
Stall: 10, 18, 30 Nm

F2 Clutch: 33, 47, 53 Nm
Stall: 40, 52 Nm

F3 Clutch: 67, 94 Nm
Stall: 58, 73, 103 Nm

Flush Socket Head

F1 Head: 8-15 mm socket capacity
F2 Head: 10-15 mm socket capacity
F3 Head: 13-21 mm socket capacity

Socket No. (ordered with base tool)

FS	1	MG	0	0		
					Output Type	
					1-Thru Hex	2-Magnetic

Extension Length
0 - Flush 2 - 1/4" 4 - 1/2" 6 - 3/4"

Socket Sizes

Flush Socket Head	EC - 3/8"	MA - 7mm
1 - F1 Head	ED - 7/16"	MB - 8mm
2 - F2 Head	EE - 1/2"	MC - 9mm
3 - F3 Head	EF - 9/16"	MD - 10mm
		ME - 11mm
		MF - 12mm
		MG - 13mm
		MH - 14mm
		MI - 15mm
		MM - 19mm

Socket Type

FS - Flush

Note: When ordering, specify the base tool and order the socket separately. The socket will be installed in the tool before shipment.

Crowfoot Nutrunners

Clecomatic Clutch & Stall



34 Series

Torque Range:

14 – 30 Nm 10 – 22 Ft. Lbs

- External torque adjustment
(Clecomatic models)
- Indexable anglehead
- One torque spring to meet specified range
- Oilless blades
- Reversible



NOTE: Models listed are examples. Use chart on bottom of facing page for specific model required but not listed.

Model Number		Free Speed	Torque Range		Socket Size		Length		Weight		Air Consumption		
15 Degree Head	30 Degree Head	RPM	ft.-lbs.	Nm	in.	mm	in.	mm	lbs.	kg	NPT	I.D.	SCFM

Clecomatic - Lever Start - Reversible

34RCA30D1	34RCA30D3	425	11-22	15-30	5/16	8	20.0	507	4.7	2.2	3/8"	5/16"	34
-----------	-----------	-----	-------	-------	------	---	------	-----	-----	-----	------	-------	----

Stall - Lever Start - Reversible

34RCS29D1	34RCS29D3	490	21	29	5/16	8	19.6	497	4.5	2.1	3/8"	5/16"	34
-----------	-----------	-----	----	----	------	---	------	-----	-----	-----	------	-------	----

General:

Tool performance rated at 90 psi (620kPa) air pressure.

Standard Equipment:

Operating instructions & service manual
Suspension bail
Exhaust Overhose
Clutch adjustment tool (Clecomatic tools)

Extra Equipment:

Specify socket from page 39.


Optional Equipment:

Assembly wrench: 201898
Torque signal kit: 301937PT
Non-reversible kit: 204999

Additional accessories: Page 44

15° Head

Part Number: 301071

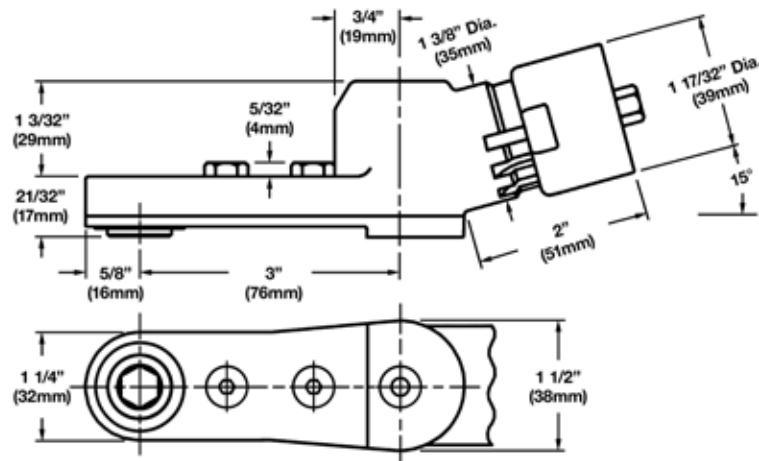
**30° Head**

Part Number: 301072

Maximum Recommended

Torque: 22 ft. lbs. (30 Nm)

Standard Length Socket

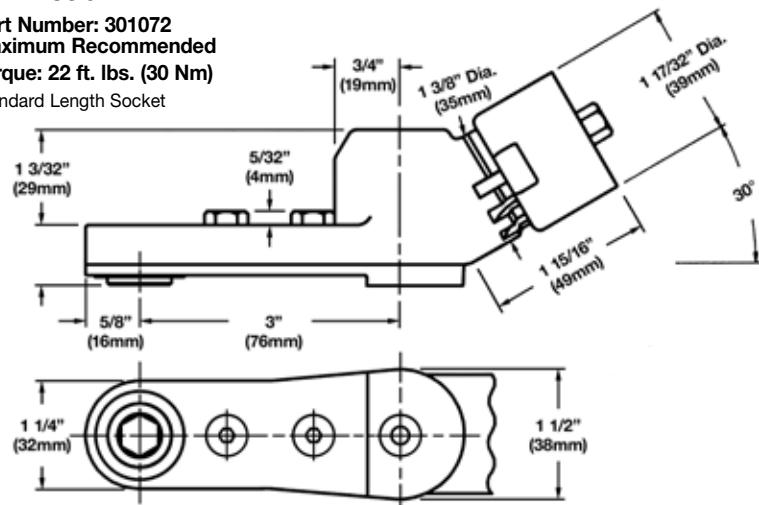**Model Number Example****Base Tool**

34 | R | C | A | 30 | D1

Motor
34 Rotation
R - ReversibleTool Style
C - Crowfoot**Control**A - Cleromatic
S - Stall**Max Output Torque**Cleromatic: 30
Stall: 14, 29**Tool Termination**D1 15° Head
D3 30° Head**Socket No. (ordered with base tool)**

CS | XX | X | X

Crowfoot
Socket**Output Type**

1 - Thru Hex

Extension Length

0 - Flush 4 - 1/2" 6 - 3/4"

Sockets

Flush	1/2" Extended	3/4" Extended
EA - 1/4"	MD - 10mm	EE - 1/2"
EC - 3/8"	ME - 11mm	EC - 3/8"
ED - 7/16"	MF - 12mm	ED - 7/16"
EE - 1/2"	MG - 13mm	EE - 1/2"
EF - 9/16"	MH - 14mm	EF - 9/16"
MB - 8mm	MI - 15mm	MB - 8mm
EH - 11/16"		MD - 10mm
		ME - 11mm
		MF - 12mm
		MG - 13mm

Hold & Drive Nutrunners

Clecomatic Clutch & Stall



34 Series

Torque Range:

24 - 103 Nm 17 - 76 Ft. Lbs

- External torque adjustment (Clecomatic models)
- Indexable anglehead
- One torque spring to meet specified range
- 1" retraction of hold spindle
- Oilless blades
- Reversible



34RAA67



NOTE: Models listed are examples. Use chart on bottom of facing page for specific model required but not listed.

Model Number	Hold Size	Free Speed	Torque		Length		Weight		Anglehead				Air Consumption		
			RPM	ft.-lbs.	Nm	in.	mm	lbs.	kg	in.	mm	in.	mm	NPT	Hose I.D.

Clecomatic - Lever Start - Reversible

34RAA53H3	5mm Female Hex	335	17-39	24-53	20.7	526	8.0	3.5	2.4	61	1.06	27	3/8"	5/16"	34
34RAA67H3	7mm Female Hex	265	24-49	33-67	20.7	526	8.0	3.5	2.4	61	1.06	27	3/8"	5/16"	34
34RAA94H3	8mm Female Hex	185	35-69	47-94	20.7	526	8.0	3.5	2.4	61	1.06	27	3/8"	5/16"	34

Stall - Lever Start - Reversible

34RAS58H3	5mm Female Hex	335	43	58	20.7	526	7.7	3.5	2.4	61	1.06	27	3/8"	5/16"	34
34RAS73H3	T30 Torx	265	54	73	20.7	526	7.7	3.5	2.4	61	1.06	27	3/8"	5/16"	34
34RAS103H3	10mm Female Hex	185	76	103	20.7	526	7.7	3.5	2.4	61	1.06	27	3/8"	5/16"	34

General:



Tool performance rated at 90 psi (620kPa) air pressure.

Standard Equipment:

Operating instructions & service manual
Suspension bail
Exhaust Overhose
Clutch adjustment tool (Clecomatic tools)
Mounting Plate

Optional Equipment:

Assembly wrench: 201898
Torque signal kit: 301937PT
Non-reversible kit: 204999
Additional accessories: Page 44

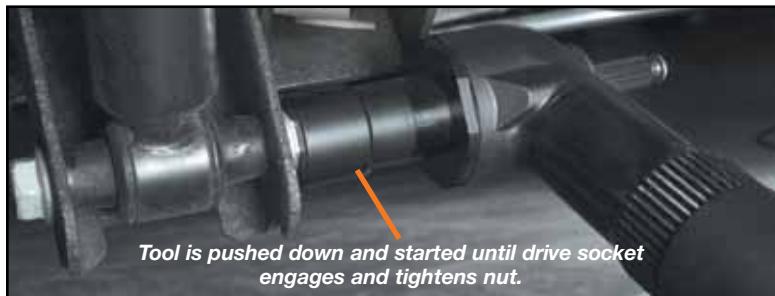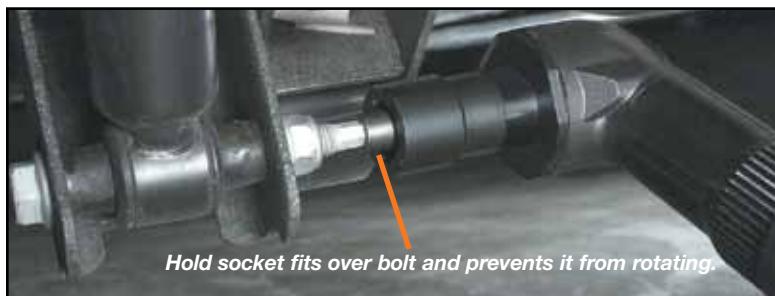

"Hold & Drive" bolts are used with these tools in automotive and truck frame applications. They reduce assembly handling to one person working from one side of the workpiece. The bolt is held stationary by the tool while the nut is tightened from the same side.

Model Number Example

Base Tool						Drive Socket		Hold Socket		
34	R	A	A	53	H	H3	ML	O	M6	B
Motor	Reversible									
Control		Tool Style								
A – Clutch		A – Angle								
S – Stall										
Maximum Torque Output						Oval Length (for oval only)				
Clutch: 53, 67, 94 Nm						(Example: For a 6mm x 8mm oval, this dimension would be MB, but drop the "M" as in M6B.)				
Stall: 58, 73, 103 Nm						Hold Socket (dimension across flats, oval also)				
Tool Termination						EA – 1/4" M6 – 6mm MH – 14mm				
H – Hold & Drive						EB – 5/16" MA – 7mm 15 – T15				
Retainer Shaft Length						EC – 3/8" MB – 8mm 20 – T20				
3 – 3 1/2"						ED – 7/16" MC – 9mm 25 – T25				
4 – 4"						EE – 1/2" MD – 10mm 30 – T30				
5 – 5 3/8"						EF – 9/16" ME – 11mm 40 – T40				
6 – 5 7/8"						EG – 5/8" MF – 12mm 45 – T45				
9 – 9"						M5 – 5mm MG – 13mm				
						(Example: On a 6mm x 8mm oval, this dimension would be M6.)				
						Hold Socket Style				
						F – Female Hex T – Torx				
						M – Male Hex O – Female oval				
						EE – 1/2" EK – 7/8" EQ – 1 1/4" ML – 18mm MR – 24mm				
						EF – 9/16" EL – 15/16" MG – 13mm MM – 19mm MS – 25mm				
						EG – 5/8" EM – 1" MH – 14mm MN – 20mm MT – 26mm				
						EH – 11/16" EN – 1 1/16" MI – 15mm MO – 21mm MU – 27mm				
						EI – 3/4" EO – 1 1/8" MJ – 16mm MP – 22mm XX – Special				
						EJ – 13/16" EP – 1 3/16" MK – 17mm MQ – 23mm				

Note: When ordering, specify the base tool and order the socket separately. The socket will be installed in the tool before shipment.

Tube Nut Wrenches

Cleomatic Clutch

Cleco®

24 Series

Torque Range:

14 - 40 Nm
19 - 54 Ft. Lbs

- One hand, two position throttle
- External torque adjustment
- Auto alignment socket

24 Series (T2)




24 Series (T3)




24 Series (T4)




Termination




T2 Head

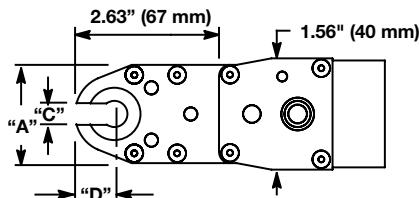

T3 Head

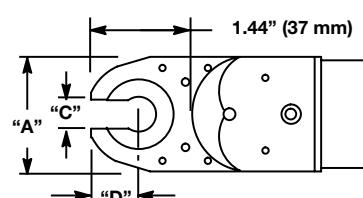

T4 Head

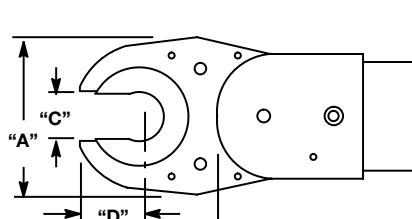

NOTE: Models listed are examples. Use chart on bottom of facing page for specific model required but not listed.

Model Number	Free Speed RPM	Torque Range		Weight		Length		Socket Size		"A"		"B"		"C"		"D"	
		Ft. Lbs. Min - Max	Nm Min - Max	Ibs.	kg	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm

Power Unit Only

24RTA12	670	3.6 - 8.9	5 - 12	2.7	1.2	12	305	NA									
---------	-----	-----------	--------	-----	-----	----	-----	----	----	----	----	----	----	----	----	----	----

Self Aligning

24RTA20T2	240	10.4 - 14.7	14 - 20	4.3	2.0	16.8	426	7/16	—	1.42	36	0.55	14	0.28	7.0	0.53	13.5
24RTA30T3	175	14.7 - 22.1	20 - 30	4.5	2.0	16.7	426	9/16	—	1.65	42	0.59	15	0.47	11.9	0.73	18.5
24RTA40T4	130	19.2 - 29.5	26 - 40	5.1	2.3	17.7	449	7/8	—	2.36	60	0.59	15	0.67	17.0	0.93	23.5

* Varies by socket dimension.

Extra Equipment:

Specify socket from page 43

General:
Air Inlet: 1/4" NPT
Tool performance rated at 90 psi (620kPa) air pressure.

Optional Equipment:

Torque signal kit: 301937PT (see page 47)



Auto Alignment Head

Tube and hose applications, once only accessible by the use of hand tools, can now be tightened by the Cleco family of Tube Nut Wrenches at a speed that maximizes productivity.

Torque repeatability is assured by the proven Clecomatic clutch and low inertia motor. These models use a single lever for the tightening of the fastener and the return of the socket to the open position. The flexibility coupled with the proven capabilities greatly increases the productivity rate of the assembly line.



Make sure that the socket is set to the open position. If not, push the throttle lever down half way to release the socket back to the open position.



Slide the tool on the fastener and push the throttle lever down fully to run the fastener down.



To free the tool, slide the tool off the tightened fastener and operate the throttle lever halfway to release the socket back to the open position.

Model Number Example


Base Tool						Socket (Order Separately)			
24 R T A 20 T2						KS2	ED	0	0
Motor						Head Type			
24						KS2 - T2			
Tool Style						KS3 - T3			
R – Reversing mechanism for socket orientation						KS4 - T4			
Tool Type									
T – Tube Nut									
Torque Control									
A – Clecomatic Clutch									
Max Torque (Nm)									
T2 - 20 Nm						MG, 1/2"	T2 Head Type		
T3 - 30 Nm						MM, 3/4"	T3 Head Type		
T4 - 40 Nm						MU, 1 1/16"	T4 Head Type		
Head Size						00, ## (specials)	T3 Head Type		
T2 - 20 Nm Max.									
T3 - 30 Nm Max.									
T4 - 40 Nm Max.									
Output Type									
0 Partial Thru Hex					2 Double Thru Hex				
1 Thru Hex					3 Partial Thru Double Hex				
Extension Length									
0 Flush					4 1/2"				
2 1/4"					6 3/4"				
Maximum Hex Socket Sizes									
EA - 1/4"					M5 - 5mm				
EC - 3/8"					M6 - 6mm				
ED - 7/16"					MA - 7mm				
EE - 1/2"					MB - 8mm				
EF - 9/16"					MD - 10mm				
EH - 11/16"					ME - 11mm				
EJ - 13/16"					MF - 12mm				
EK - 7/8"					MG - 13mm				
EL - 15/16"					MH - 14mm				
EM - 1"					MI - 15mm				
EO - 1 1/8"					MJ - 16mm (5/8")				
EP - 1 3/16"					MU - 27mm (1 1/16")				
EQ - 1 1/4"									

Note: When ordering, specify the base tool and order the socket separately. The socket will be installed in the tool before shipment.

Nutrunner Accessories

Torque Reaction Bars & Slave Square Drives

Part No.	Description	Used On
869770	Steel Bar	45, 55 series inline
48047128	Steel Bar	64...D4 series
46037081	Slave Square Drive	64...D4 series
46177030	Slave Square Drive	64...D6 series
46607058	Slave Square Drive	64...D8 series

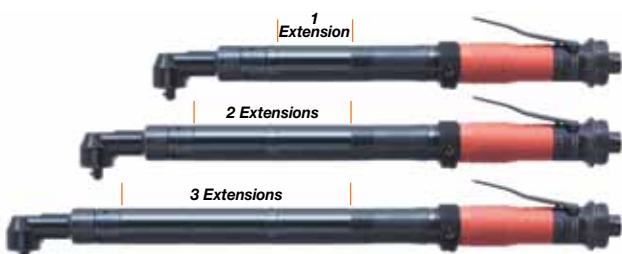

Extension Kit (3.5")

Part No.	Used On
301081	34 series (37 Nm or higher)
301108	24/34 series (36 Nm or lower)

Anglehead Covers

Part No.	Used On	
	Tool Series	Anglehead
205831	24/34	AH, AM
205833	24/34	AX
205834	24/34	AZ
205837	14	AH
205839	45/55	T
205835	45/55	P
205838	75	V




Joint Simulator

Description	Torque Range		Width		Height		Length		Part No.
	ft-lbs.	Nm	in.	mm	in.	mm	in.	mm	
Joint Simulator	220-12	300-15	10.4	264	16	406	26	667	550006

Mounting Brackets (right angle tools)

Part No.	Description	Used On
201012	Torque reaction bracket	45, 55 series
201039	Fixed tooling bracket	45, 55 series
201510	Torque reaction bracket	75 series
201034	Torque reaction bracket	75 series (standard)

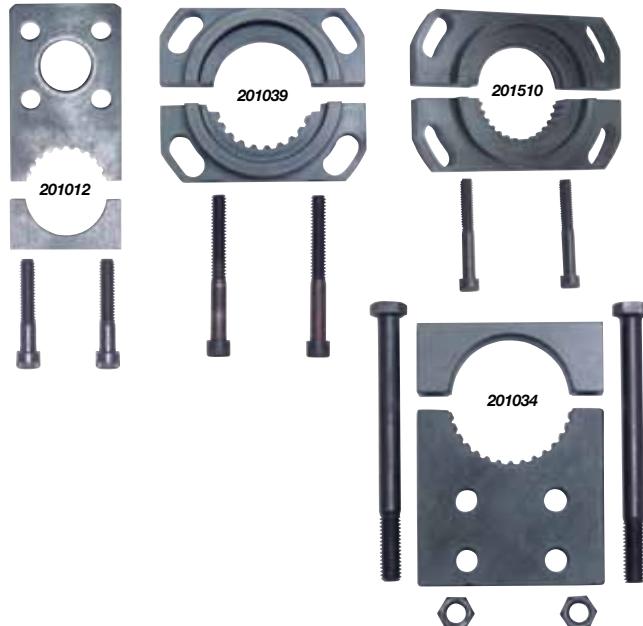

Suspension Bail

Part No.	Used On
867711	8, 35, 45, 55 series
204987	24, 34 wire bail



Swivel Suspension Bail

Part No.	Used On
541715-5	24, 34 series
54397004	64...D4 series
46437006	64...D6 series
46607016	64...D8 series
46037036	64...D12 series



Torque Signal Kit

Air signal to indicate clutch shut-off.

Part No.	Used On
201900	24/34 Clecomatic (old style)
301937PT	24/34 Clecomatic (new style)
301106	14 Clecomatic



Assembly Wrench

Part No.	Used On
201898	Two required





The TVP-100 Series Torque Verifier provides low-cost assembly assurance for pneumatic screwdrivers, nutrunners and pulse tools.

The Cleco TVP-100 verifier improves your assembly process by eliminating operator error caused by early trigger release, fastener cross-threading or re-hits.

The TVP-100 is designed for use with pneumatic clutch screwdrivers/nutrunners and Cleco shut-off pulse tools equipped with torque signal kits.

The TVP-100 provides visual and audio feedback

for both individual fastener and batch parameters, assuring that every fastener has been rundown to the capability of the tool.

Based on existing Cleco TME controller technology, the TVP-100 navigational screen allows for simple set-up and operation.

The TVP-100 works by reading the signature of a ported pneumatic assembly tool through its fastening cycle. Any deviation from the normal signature caused by re-hits, cross threads, early trigger release or a number of variables will elicit a **NOK** visual and audio signal from the verifier, notifying the operator of an error. Whereas a Cleco DC controller controls the tool and the fastening process, the TVP-100 is a cost-effective way of verifying torque by following the torque signature of a tool.



Accessories

Cleco TVP-100 Series Torque Verifier

Features

- Verifies fastener installation with **OK/NOK** audio and visual indicators
- On screen verification of individual fastener assembly status with batch count
- VGA screen displays graph for each rundown
- Stores 1,000 rundowns
- Sequencing capability
- 8 parameter sets available for multiple applications
- "Auto Cal" permits fast and easy tool set up for any joint type
- Password protected
- Multiple languages



TVP-100 Series Torque Verifiers

Model Number		Language	Weight		Width		Height		Depth	
115VAC*	230VAC*		lbs.	kg	in.	mm	in.	mm	in.	mm
TVP-110-15-U	TVP-110-30-U	English	6	2.72	8.75	222	9.13	232	4.13	105
TVP-110-15-D	TVP-110-30-D	German	6	2.72	8.75	222	9.13	232	4.13	105
TVP-110-15-S	TVP-110-30-S	Spanish	6	2.72	8.75	222	9.13	232	4.13	105
TVP-110-15-P	TVP-110-30-P	Portuguese	6	2.72	8.75	222	9.13	232	4.13	105

** 230V units are CE compliant.

All model numbers include power cable, air signal transducer, 25 foot cable to connect TVP to air signal transducer, and 8 foot air line to connect transducer to tool.
NOTE: Tool must be equipped with torque signal kit.

24 Volt Inputs/Outputs:

Inputs: Up to 8 Applications Outputs: Cycle Accept
Reset Batch Accept
Suspend Reject

Accessories

Cleco TVP-100 Series Torque Verifier

Cleco®

Accessories

Torque Signal Kits

Part No.	Tool Used On
301106	14SCA and 14RAA series
301118	14TTA series
301119	14PTA series
201900	24RAA and 34RAA (<i>old style</i>)
301937PT	24RAA and 34RAA (<i>new style</i>)
934918	PTH series pulse tools ("C" & "D" vintage only)

Phoenix Connector

Part No.	Description
542892	24 Volt Input/Output Phoenix connector
939348	Strain relief for above connector

Cables

Part No.	Description
207237	115V Transducer and cable
207238	230V Transducer and cable


*115V and 230V transducer and cable assemblies have different connectors at the TVP end of the cable.



Ratchet Wrenches

Stall Type

Cleco Ratchet Wrenches. For Applications That Are “Impossible” To Get To.

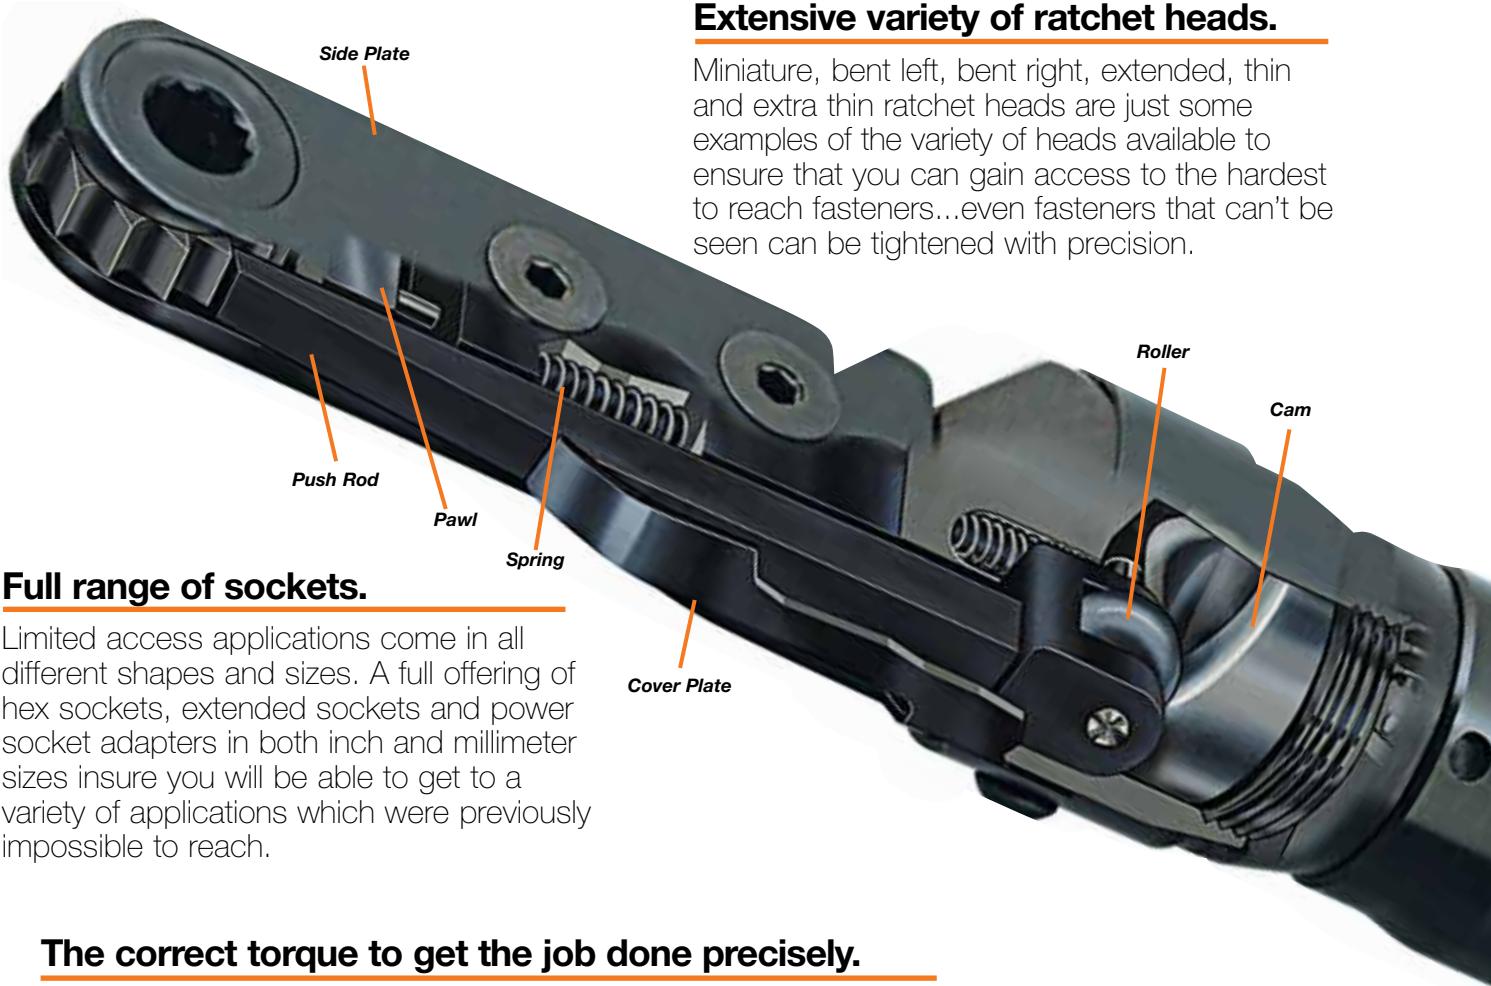

Full range of sockets.

Limited access applications come in all different shapes and sizes. A full offering of hex sockets, extended sockets and power socket adapters in both inch and millimeter sizes insure you will be able to get to a variety of applications which were previously impossible to reach.

The correct torque to get the job done precisely.

Cleco 24 and 34 series ratchet wrenches are available in sizes up to 50 Ft.Lbs. Several sizes of side plate widths and thicknesses are available to provide a wide range of torques without sacrificing size or durability

Success in simplicity.

By using a single direction stall motor the Cleco 24 and 34 series ratchet wrenches eliminate components that traditionally add cost and decrease service life. With this tool you truly get what you pay for. A very economical and dependable solution for the hardest to reach fasteners. Need a reversible tool? No problem, simply flip the tool over.

Gears that have stood up to the test of time.

The key wear items in the ratchet head (gears, cams, and push rods) have remained unchanged from the previous H16 and H30 tools. Not only can you have confidence in their durability, you won't have to buy new replacement parts.



Improved motor for better performance.

Innovative low inertia motor design provides more usable power in a smaller package size. The end result is a more ergonomic handle for a more productive tool. The same successful motor is used on Cleco flush socket, crowfoot, hold-and-drive and standard Clecomatic clutch shut-off nutrunners.

Ergonomic grip for operator comfort.

Rubber coated motor housing helps isolate the operator from temperature changes.

Cleco®

Easy assembly/disassembly with a standard spanner wrench.

Hardened steel bearing plates resist wear and assures longer life.

Ratchet Wrenches

Stall Type

Cleco®

24 & 34 Series

Torque Range:
up to 68.3 Nm
up to 50.4 Ft. Lbs

- Stall type
- Non-Reversible



Cleco 24/34 Series Model Number Nomenclature

24 | N | R | S | XX | H | XX

Tool Series

24
34

Tool Style

N – Non-reversible

Tool Type

R – Lever throttle ratchet wrench

Torque Control

S – Stall

Maximum Torque

(rounded to the nearest Nm)

Ratchet Head Size
(*"A"* dimension shown on next page)

12	16	25
13	18	29
15	20	37

Ratchet Head Style*


A – Miniature Straight	P – 20° Angled Right
H – Standard	R – 20° Angled Left
K – Thin	Q – 40° Angled Right
J – Extra Thin	T – 40° Angled Left
L – 3" Extended	

*For a complete list of attachments refer to Parts Manual #PL17-RA


Ratchet Wrenches

Stall Type

Cleco®

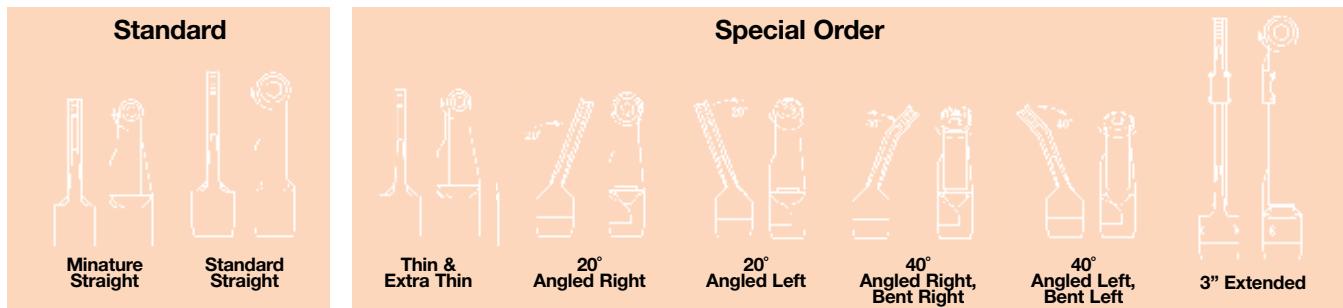

Other head types are available. Contact your Cooper Power Tools sales representative.

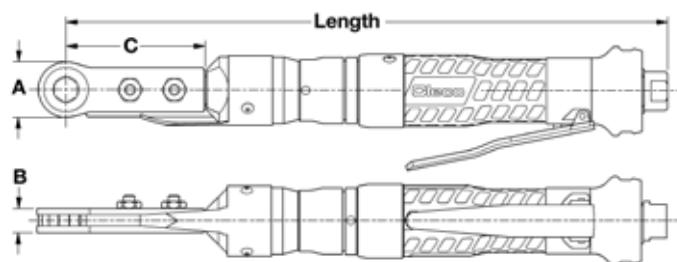

Model Number	Free Speed	Maximum Torque		Maximum Socket Size		"A"		"B"		"C"		Length		Weight	
		RPM	Ft. Lbs.	Nm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.

24 Series

24NRS15A13	265	11.0	14.9	7/16	11	13/16	20.6	1/2	12.7	2.88	73.2	13.4	340	2.7	1.2
24NRS15A12	285	11.1	15.0	3/8	10	3/4	19.0	1/2	12.7	2.88	73.2	13.4	340	2.7	1.2
24NRS20H15	305	14.8	20.1	1/2	13	15/16	23.8	9/16	14.2	3.13	79.5	14.0	356	2.9	1.3
24NRS21H16	285	15.4	20.9	9/16	16	1	25.4	9/16	14.2	3.13	79.5	14.0	356	3.0	1.3
24NRS23A13	145	17.2	23.3	7/16	11	13/16	20.6	1/2	12.7	2.88	73.2	14.2	361	2.9	1.3
24NRS23H15	170	17.3	23.5	1/2	13	15/16	23.8	9/16	14.2	3.13	79.5	14.8	376	3.1	1.4
24NRS23H20	250	17.5	23.7	3/4	19	1 1/4	31.8	9/16	14.2	3.13	79.5	14.2	361	3.0	1.4
24NRS24H16	155	17.7	24.0	9/16	16	1	25.4	9/16	14.2	3.13	79.5	14.8	376	3.2	1.4
24NRS24H18	265	18.0	24.4	5/8	16	1 1/8	28.6	9/16	14.2	3.13	79.5	14.1	358	3.0	1.4
24NRS24A12	155	18.3	24.8	3/8	10	3/4	19.0	1/2	12.7	2.88	73.2	14.2	361	2.9	1.3
24NRS29H18	145	21.4	29.0	5/8	16	1 1/8	28.6	9/16	14.2	3.13	79.5	14.9	378	3.2	1.5
24NRS29H25	180	21.5	29.1	15/16	24	1 9/16	39.7	9/16	14.2	3.25	82.5	14.4	366	3.1	1.4
24NRS30H20	135	22.0	29.8	3/4	19	1 1/4	31.8	9/16	14.2	3.13	79.5	14.9	378	3.2	1.5
24NRS33H29	165	24.6	33.4	1 1/8	29	1 13/16	46.0	5/8	15.9	3.50	88.9	14.9	378	3.3	1.5
24NRS34H25	100	25.6	34.7	15/16	24	1 9/16	39.7	9/16	14.2	3.25	82.5	15.2	386	3.3	1.5

34 Series

34NRS29H15	255	21.6	29.3	1/2	13	15/16	23.8	9/16	14.2	3.13	79.5	16.0	406	3.7	1.7
34NRS31H16	240	22.9	31.0	9/16	16	1	25.4	9/16	14.2	3.13	79.5	16.0	406	3.7	1.7
34NRS35H20	210	25.9	35.1	3/4	19	1 1/4	31.8	9/16	14.2	3.13	79.5	16.2	411	3.7	1.7
34NRS36H18	225	26.7	36.2	5/8	16	1 1/8	28.6	9/16	14.2	3.13	79.5	16.1	409	3.7	1.7
34NRS36H15	155	26.8	36.3	1/2	13	15/16	23.8	9/16	14.2	3.13	79.5	16.8	427	3.9	1.8
34NRS38H16	145	28.1	38.1	9/16	16	1	25.4	9/16	14.2	3.13	79.5	16.8	427	3.9	1.8
34NRS42H25	150	30.9	41.9	15/16	24	1 9/16	39.7	9/16	14.2	3.25	82.5	16.4	417	3.8	1.7
34NRS46H20	125	33.9	46.0	3/4	19	1 1/4	31.8	9/16	14.2	3.13	79.5	17.0	432	4.0	1.8
34NRS46H18	135	34.1	46.2	5/8	16	1 1/8	28.6	9/16	14.2	3.13	79.5	16.9	429	4.0	1.8
34NRS48H29	140	35.1	47.6	1 1/8	29	1 13/16	46.0	5/8	15.9	3.50	88.9	16.9	429	4.0	1.8
34NRS52H25	90	38.4	52.1	15/16	24	1 9/16	39.7	9/16	14.2	3.25	82.5	17.2	437	4.1	1.8
34NRS53H37	120	38.9	52.7	1 5/8	41	2 11/32	59.5	5/8	15.9	3.75	95.3	17.3	439	4.4	2.0
34NRS63H29	85	46.7	63.3	1 1/8	29	1 13/16	46.0	5/8	15.9	3.50	88.9	17.7	450	4.2	1.9
34NRS68H37	70	50.4	68.3	1 5/8	41	2 11/32	59.5	5/8	15.9	3.75	95.3	18.1	460	4.6	2.1

General:

Air Inlet: 1/4" NPT

Tool performance rated at 90 psi (620kPa) air pressure.

Standard Equipment:

Suspension bail, hex socket

Socket Selection:

See pages 53-55

Ratchet Wrenches

Clutch Type

Cleco®

H16, H30, 41 & 60 Series

Torque Range:

up to 415 Nm
up to 306 Ft. Lbs

- Clutch activated air shut-off (H16, H30 & 60 series)
Air shut-off (41 series)
- Non-Reversible



Model Number	Free Speed		Maximum Torque		Maximum Socket Size		"A"		"B"		"C"		Weight		Length	
	RPM	Ft. Lbs.	Nm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kg	in.	mm	
H16NDR09H15	130	10.0	13.5	1/2	13	15/16	23.8	9/16	14.2	3.13	79.5	4.3	2.0	18.9	480	
H30NDR08H15	120	12.0	16.2	1/2	13	15/16	23.8	9/16	14.2	3.13	79.5	4.9	2.2	20.6	523	
41NDR236H15	360	23.0	31.1	1/2	13	15/16	23.8	9/16	14.2	3.13	79.5	5.7	2.6	17.7	449	
41NDR172H15	265	32.0	43.3	1/2	13	15/16	23.8	9/16	14.2	3.13	79.5	5.7	2.6	17.7	449	
41NDR130H15	200	42.0	56.9	1/2	13	15/16	23.8	9/16	14.2	3.13	79.5	6.1	2.8	18.8	478	
H30NDR08H16	110	13.0	17.6	5/8	16	1	25.4	9/16	14.2	3.13	79.5	4.9	2.2	20.6	523	
41NDR236H16	335	25.0	33.8	5/8	16	1	25.4	9/16	14.2	3.13	79.5	5.7	2.6	17.7	449	
41NDR172H16	245	34.0	46.0	5/8	16	1	25.4	9/16	14.2	3.13	79.5	5.7	2.6	17.7	449	
41NDR130H16	185	45.0	60.9	5/8	16	1	25.4	9/16	14.2	3.13	79.5	6.1	2.8	18.8	478	
H30NDR08H18	105	18.0	24.3	5/8	16	1 1/8	28.6	9/16	14.2	3.13	79.5	4.9	2.2	20.7	526	
41NDR236H18	315	29.0	39.2	5/8	16	1 1/8	28.6	9/16	14.2	3.13	79.5	5.8	2.6	17.7	449	
41NDR130H18	170	52.0*	70.4	5/8	16	1 1/8	28.6	9/16	14.2	3.13	79.5	6.1	2.8	18.8	478	
H16NDR09H20	110	16.0	21.6	3/4	19	1 1/4	31.8	9/16	14.2	3.13	79.5	4.4	2.0	19.1	485	
H30NDR08H20	100	19.0	25.7	3/4	19	1 1/4	31.8	9/16	14.2	3.13	79.5	4.9	2.2	20.8	528	
41NDR172H20	215	42.0	56.9	3/4	19	1 1/4	31.8	9/16	14.2	3.13	79.5	5.8	2.6	17.7	449	
41NDR130H20	160	56.0*	75.8	3/4	19	1 1/4	31.8	9/16	14.2	3.13	79.5	6.1	2.8	18.8	478	
60NDR092HD24	95	122.0	165.3	3/4	19	1 1/2	38.1	7/8	22.4	6.19	157.2	16.9	7.7	27.4	697	
H30NDR08H25	70	22.0	29.8	15/16	24	1 9/16	39.7	9/16	14.2	3.25	82.5	5.0	2.3	21.0	533	
41NDR172H25	155	53.0*	71.8	15/16	24	1 9/16	39.7	9/16	14.2	3.25	82.5	5.8	2.6	17.8	452	
41NDR130H25	115	70.0*	94.8	15/16	24	1 9/16	39.7	9/16	14.2	3.25	82.5	6.1	2.8	18.9	481	
60NDR092HD40	60	212.0	287.2	1 1/2	38	2 1/2	63.5	7/8	22.4	6.69	169.9	17.2	7.8	28.4	722	
60NDR092HD48	50	252.0	341.4	1 15/16	49	3	76.2	1	25.4	6.94	176.3	17.7	8.0	28.9	735	
60NDR092HD56	40	306.0	415.0	2-3/8	60	3 1/2	88.9	1	25.4	7.25	184.2	18.0	8.2	29.5	749	

General:

Air Inlet: 1/4" NPT (H16, H30),
3/8" NPT (41), 1/2" NPT (60)
Tool performance rated at 90 psi (620kPa) air pressure.

Standard Equipment:

H16, H30: Suspension bail, hex socket
41: Hex socket
60: Hex socket, reaction bar collar
(1/2" hex opening for reaction bar)


Socket Selection:

See pages 53-55

*WARNING: these terminations are not recommended for applications over 50 Ft. Lbs. (68 Nm) torque.

Standard Length

24, 34, H16, H30, 41 Series



(No additional cost)

Termination		12	13	15	16	18	20	25	29	37	
"A"		3/4	13/16	15/16	1	1 1/8	1 1/4	1 9/16	1 13/16	2 11/32	
"B"		1/2	1/2	9/16	9/16	9/16	9/16	9/16	5/8	5/8	
"C"	Hex*	Socket Part Numbers									
1/4"	S.H.	28000	28020	28048	28075						
1/4"	D.H.	28001	28021	28051							
9/32"	S.H.	28012									
5/16"	S.H.	28002	28022	28040	28056		28101	28135			
5/16"	D.H.	28003	28023	28052	28078		28124			30434	
11/32"	S.H.	28004	28024		28074	28097	28102				
11/32"	D.H.	28005									
3/8"	S.H.	28006	28026	28041	28057	28094	28160				
3/8"	D.H.	28007	28027	28042	28058		28123	28166			
7/16"	S.H.	28009†	28029	28043	28060	28081	28105	28136	28192	30418	
7/16"	D.H.	28010†	28030	28044	28061	28082	28106	28137		30435	
1/2"	S.H.	28031†		28046	28063	28083	28108	28139	28170	30423	
1/2"	D.H.	28032†		28047	28064	28084	28109	28140			
9/16"	S.H.				28066	28087	28111	28141	28171	30432	
9/16"	D.H.				28067	28088	28112	28142	28189		
5/8"	S.H.				28069†	28090	28115	28144	28172		
5/8"	D.H.				28070†	28091	28116	28145	28190	30431	
11/16"	S.H.					28118	28146	28173	28173	30433	
11/16"	D.H.					28119	28147				
3/4"	S.H.					28121	28148	28174	30429		
3/4"	D.H.					28122	28149	28191			
13/16"	S.H.					28150	28150	28175			
13/16"	D.H.					28151					
7/8"	S.H.					28154	28176	30427			
7/8"	D.H.					28155	28177				
15/16"	S.H.					28156	28179	30430			
15/16"	D.H.					28157	28180	30434			
1"	S.H.					28181	30428				
1"	D.H.					28182					
1-1/16"	S.H.						28183	30436			
1-1/16"	D.H.						28184				
1-1/8"	S.H.						28185	30417			
1-1/8"	D.H.						28187				
1-3/16"	S.H.							30425			
1-1/4"	S.H.							30419			
1-5/16"	S.H.							30426			
1-7/16"	S.H.							30420			
1-1/2"	S.H.							30421			
1-1/2"	D.H.							30437			
1-5/8"	S.H.							30422			
6 mm	S.H.	28016	28033	28055							
7 mm	S.H.	28017	28034	530440			28126	28163			
8 mm	S.H.	28002	28022	28040	28056						
8 mm	D.H.	28003	28023		28078						
9 mm	S.H.				28071						
9 mm	D.H.		28037								
10 mm	S.H.	28008	28028	28054	28059	28093	28104	28164			
11 mm	S.H.	28009†	28029	28043	28060	28081		28136	530460		
12 mm	S.H.			28045	28062		28107	28138			
13 mm	S.H.		28036	28053	28077	28096	28125	28161	530461		
14 mm	S.H.			530441	28065	28086	28110	28159			
15 mm	S.H.				28068	28089	28113	28143	530462	532431	
15 mm	D.H.				28080	28095					
16 mm	S.H.				28100	28099		28167			
17 mm	S.H.				543126	28092	28117	28158	28193		
18 mm	S.H.						28120	28165	30439		
19 mm	S.H.						28121	28148	28174	30429	
19 mm	D.H.						28122	28149	28191		
21 mm	S.H.							28152			
22 mm	S.H.							28162			
23 mm	S.H.								28178		
24 mm	S.H.							28168			
29 mm	S.H.								28188		

*S.H. = Single Hex; D.H. = Double Hex

† FRAGILE: For light duty operations only.


Ratchet Wrenches

Hex Socket Selection Charts

Standard Length

60 Series (No additional cost)

Termination		24	32	40	48	56		
"A"		1 1/2	2	2 1/2	3	3 1/2		
"B"		7/8	7/8	7/8	1	1		
"C"	Hex*	Socket Part Numbers						
1/2"	S.H.	29015	29053			29121		
1/2"	D.H.	29016						
9/16"	S.H.	29017						
9/16"	D.H.	29018						
5/8"	S.H.	29019	29035					
5/8"	D.H.	29020	29036					
11/16"	S.H.	29021	29037	507159				
11/16"	D.H.	29038						
3/4"	S.H.	29023	29039	507157	29115	523737		
3/4"	D.H.	29024	29040					
13/16"	S.H.	29041	29055					
13/16"	D.H.	29042						
7/8"	S.H.	29043	29057		29150			
7/8"	D.H.	29044	29058					
15/16"	S.H.	29045	29059	29111	29122			
15/16"	D.H.	29046	29060	29112				
1"	S.H.	29047	29061	29116	29147			
1"	D.H.	29048	29062					
1 1/16"	S.H.	29049	29063	29114	29146			
1 1/16"	D.H.	29050	29064					
1 1/8"	S.H.	29051 [†]	29065	29090	29148			
1 1/8"	D.H.	29052 [†]	29066	29091				
1 3/16"	S.H.		29075	29118	29153			
1 1/4"	S.H.		29067	29092	29149			
1 1/4"	D.H.		29068	29093				
1 5/16"	S.H.		29069	29094	523736			
1 5/16"	D.H.		29070	29095				
1 3/8"	S.H.			29117	29145			
1 7/16"	S.H.		29071	29096	29123			
1 7/16"	D.H.		29072					
1 1/2"	S.H.		29073	29098	29125			
1 1/2"	D.H.		29074					
1 9/16"	S.H.			29152				
1 5/8"	S.H.			29100	29127			
1 5/8"	D.H.			29101	29128			
1 11/16"	S.H.				29129			
1 11/16"	D.H.							
1 3/4"	S.H.			29103				
1 3/4"	D.H.			29108				
1 13/16"	S.H.			29104	29131			
1 13/16"	D.H.				29132			
1 7/8"	S.H.			29106	29133			
1 15/16"	S.H.			29110 [†]				
2"	S.H.				29135			
2 1/16"	S.H.				29137			
2 1/16"	D.H.				29138			
2 3/16	S.H.				29139			
2 1/4"	S.H.				29141			
2 3/8"	S.H.				29143 [†]			
15 mm	S.H.	29028	507135		507161			
18 mm	S.H.	29027						
21 mm	S.H.	29029	507136					
22 mm	S.H.	507134						
24 mm	S.H.	507132	507160	29119				
26 mm	S.H.	507133	507157					
29 mm	S.H.	507134						
30 mm	S.H.	507137	507162					
36 mm	S.H.		29079		523738			




Power Socket Adapters



Adapts grooved sockets to square drive. Use with conventional square drive socket. (additional cost)

Part Number	Hex Size	Square Drive	Overall Length
A-312	3/8"	3/8"	0.94"
A-314	7/16"	3/8"	0.94"
A-514	7/16"	1/2"	1.09"
A-516	1/2"	1/2"	1.16"
A-518	9/16"	1/2"	1.16"
A-520	5/8"	1/2"	1.13"
A-524	3/4"	1/2"	1.13"


Extended Length 24, 34, H16, H30, 41 Series



(Additional cost. Provides CCW tightening.)

Termination	12	13	15	16	18	20	25	29
"A"	3/4	13/16	15/16	1	1 1/8	1 1/4	1 9/16	1 13/16
"B"	1/2	1/2	9/16	9/16	9/16	9/16	9/16	5/8
Socket Part Numbers								
5/16"	S.H.	1/2"				501060		
3/8"	S.H.	1/4"	20966					
3/8"	D.H.	1/4"			28652			
7/16"	S.H.	1/4"			28650			
7/16"	S.H.	1/2"			501056			
1/2"	S.H.	1/4"			28645			
1/2"	S.H.	1/2"			501059			
1/2"	S.H.	5/8"				501061		
1/2"	S.H.	3/4"			501054			
9/16"	S.H.	3/8"			501051			
9/16"	S.H.	1/2"			501053			
9/16"	S.H.	7/8"			28649			
5/8"	S.H.	3/8"			28648†			
1 3/16"	S.H.	3/4"				501062		
13 mm	S.H.	1/2"				501063		

Double Extended 24, 34, H16, H30, 41 Series



(Additional cost)

Termination	12	13	15	16	18	20	29
"A"	3/4	13/16	15/16	1	1 1/8	1 1/4	1 13/16
"B"	1/2	1/2	9/16	9/16	9/16	9/16	5/8
Socket Part Numbers							
5/16"	S.H.	1/4"	10642				
5/16"	D.H.	1/2"			501222		
3/8"	S.H.	3/8"			501225		
7/16"	S.H.	1/4"		18950			
7/16"	S.H.	1/2"				28787	
1/2"	D.H.	1/8"			28654		
1/2"	S.H.	1/4"			28663	28789	
1/2"	S.H.	7/16"			501221		
1/2"	D.H.	1/2"			28660		
9/16"	S.H.	1/8"			28659		
9/16"	D.H.	1/8"			28655		
9/16"	S.H.	1/4"			28656		
9/16"	D.H.	3/8"			28657		
9/16"	S.H.	1/2"				28791	501230
9/16"	D.H.	1/2"					501231
11/16"	S.H.	1/2"				28793	
3/4"	D.H.	3/8"				28797†	
3/4"	S.H.	3/4"					28661
13 mm	S.H.	1/4"			501229	530024	
13 mm	S.H.	3/8"			501226		
13 mm	S.H.	1/2"			530741	530028	
13 mm	S.H.	3/4"			530742	531201	
15 mm	S.H.	1/4"			501227	530025	530002
15 mm	S.H.	3/8"			501228	530001	501233
15 mm	S.H.	1/2"			530026	530003	501234
15 mm	S.H.	3/4"			531200	530004	

Ratchet Wrenches


Hex Socket Selection Charts

Cleco®

Extended Length H16, H30, 41 Series

(Additional cost. Provides CW tightening.)

Termination		12	13	15	16	18	20	25	29
"A"		3/4	13/16	15/16	1	1 1/8	1 1/4	1 9/16	1 13/16
"B"		1/2	1/2	9/16	9/16	9/16	9/16	9/16	5/8
Socket Part Numbers									
1/4"	S.H.	1/4"	28300						
1/4"	D.H.	3.8"		508406					
1.4"	D.H.	1/2"	28314						
5/16"	S.H.	1/4"	28301	28331	28353				
5/16"	D.H.	1/4"	28316		28387				
5/16"	S.H.	3/8"	28302	28333	28338				
5/16"	D.H.	3/8"		28335	28352				
5/16"	S.H.	1/2"	28320		28350	516546			
5/16"	S.H.	3/4"			28392				
5/16"	S.H.	7/8"	28313						
11/32"	S.H.	1/4"	28303						
11/32"	S.H.	1/2"		28336					
11/32"	S.H.	3/4"	29304						
3/8"	D.H.	1/8"		28347	28384				
3/8"	S.H.	1/4"	28305	29323	28339	28354			
3/8"	D.H.	1/4"	28317		28386				
3/8"	S.H.	3/8"	28306	28324	28385		28407		
3/8"	S.H.	1/2"	28307		28355	28441			
3/8"	D.H.	1/2"	28308						
3/8"	S.H.	5/8"	28319						
3/8"	D.H.	5.8"		28325					
3/8"	S.H.	3/4"	28309		28356	28408			
3/8"	D.H.	3/4"			28389				
3/8"	S.H.	7/8"		28326					
3/8"	S.H.	1"			28340				
3/8"	D.H.	1"		28351					
7/16"	S.H.	1/8"		508399					
7/16"	S.H.	1/4"	28310†	28327	28341	28357	28439		
7/16"	D.H.	1/4"		28334	28342	28358			
7/16"	S.H.	3/8"	28311†	28328	28359		28409		
7/16"	S.H.	1/2"	28312	28329	28343	28360	28405	28410	
7/16"	S.H.	5/8"			28344				
7/16"	D.H.	5/8"		508397					
7/16"	S.H.	3/4"			28361	28411			
7/16"	S.H.	7/8"			28362				
7/16"	D.H.	1"		508398					
1/2"	S.H.	1/8"		508400	28363				
1/2"	D.H.	1/8"		508404					
1/2"	S.H.	1/4"		28345	28364	28406	28412		
1/2"	D.H.	1/4"		28348	28365				
1/2"	S.H.	3/8"		28330	28366		28413	28465	28469
1/2"	S.H.	1/2"			28367	28402	28414		28478
1/2"	D.H.	1/2"		28349	28368				
1/2"	S.H.	5/8"			28369	28401		28466	
1/2"	D.H.	5/8"		28346		28437			
1/2"	S.H.	3/4"			28370	28404	28415		
1/2"	S.H.	7/8"				28416			
1/2"	S.H.	1"			28371				
9/16"	S.H.	1/8"			28372				
9/16"	S.H.	1/4"			28373	28395	28418		28471
9/16"	D.H.	1/4"			28374				
9/16"	S.H.	3/8"			28375†	28396			
9/16"	D.H.	3/8"			28376†	28440			
9/16"	S.H.	1/2"			28377†	28403	28419	28463	
9/16"	D.H.	1/2"			28378†		28420	517065	
9/16"	S.H.	5/8"			28379†	28397			
9/16"	S.H.	3/4"			28393†		28421	28468	
9/16"	D.H.	3/4"				28444	28464		
9/16"	S.H.	7/8"			28280†				
9/16"	D.H.	7/8"		516547					
9/16"	S.H.	1"				517061			
5/8"	S.H.	1/8"				28422			
5/8"	S.H.	1/4"			28381†		28452	28479	
5/8"	D.H.	1/4"				28423			
5/8"	S.H.	3/8"			28382†				
5/8"	S.H.	1/2"			28388†	28399	28424	28453	
5/8"	S.H.	5/8"				28454			
5/8"	S.H.	3/4"			28400	28426	28455		



Termination		12	13	15	16	18	20	25	29
"A"		3/4	13/16	15/16	1	1 1/8	1 1/4	1 9/16	1 13/16
"B"		1/2	1/2	9/16	9/16	9/16	9/16	9/16	5/8
Socket Part Numbers									
5/8"	D.H.	1"						28428	
11/16"	S.H.	1/4"						28438	
11/16"	D.H.	1/4"						28430	
11/16"	S.H.	3/8"						28431	28456
11/16"	S.H.	1/2"						28432	514830
11/16"	S.H.	1"							517062
3/4"	S.H.	1/4"						28433†	
3/4"	S.H.	3/8"							28458
3/4"	S.H.	1/2"						28434	
3/4"	S.H.	3/4"						28435	28459 28476
3/4"	S.H.	1"						28436	28470
7/8"	S.H.	1/4"							517063
7/8"	D.H.	5/8"							28461
7/8"	S.H.	1"							28462
15/16"	S.H.	1/2"							28474
1"	S.H.	1/2"							28472
1-1/8"	S.H.	1/2"							28477
6 MM	S.H.	1/4"							
6 MM	S.H.	1/2"							
7 MM	S.H.	1/4"						516554	
7 MM	S.H.	1/2"						516553	
8 MM	S.H.	1/4"						516558	
8 MM	S.H.	1/2"						516555	
10 MM	S.H.	1/4"						516559	
10 MM	S.H.	3/8"						516559	
10 MM	S.H.	1/2"						533472	28390
10 MM	S.H.	1/2"						508405	516556
11 MM	S.H.	1/4"							530515
11 MM	S.H.	1/2"							530517
12 MM	S.H.	1/2"							530520
13 MM	S.H.	1/8"							28391
13 MM	S.H.	1/4"							28394
13 MM	S.H.	3/8"							525137
13 MM	S.H.	1/2"							516552
13 MM	S.H.	1"							530519
14 MM	S.H.	1/4"							530516
14 MM	S.H.	1/2"							28449 517070
15 MM	S.H.	1/4"							530517
15 MM	D.H.	1/4"							530518
15 MM	S.H.	3/8"							28451
15 MM	D.H.	3/8"							28630
15 MM	S.H.	1/2"							516551
15 MM	D.H.	1/2"							28447 517066
15 MM	S.H.	3/4"							
17 MM	S.H.	1/4"							28446
17 MM	S.H.	3/8"							517068 514831
17 MM	S.H.	1/2"							28429 517060 514829
17 MM	D.H.	1"							28445
18 MM	S.H.	3/4"							543176 17069

Termination		12	13	15	16	20	25	29
"A"		3/4	13/16	15/16	1	1 1/4	1 9/16	1 13/16
"B"		1/2	1/2	9/16	9/16	9/16	9/16	5/8
Socket Part Numbers								
1/4"		28741						
5/16"		28740						
3/8"		28739						
7/16"		28742	504772	28745	28750	28751		25737
1/2"			28746	28748	28752	28766		
9/16"					28753	28768		
5/8"					28754			
3/4"					28755	28767		

* S.H. = Single Hex; D.H. = Double Hex

† FRAGILE: For light duty operations only.



Termination		12	13	15	16	18	20	25	29
"A"		3/4	13/16	15/16	1	1 1/8	1 1/4	1 9/16	1 13/16
"B"		1/2	1/2	9/16	9/16	9/16	9/16	9/16	5/8

<tbl_r cells="9" ix="3" maxcspan="2" maxrspan="1" usedcols="1

Pulse Nutrunners

Cleco®

Cleco Pulse Tools = Productivity

The Cleco D Series pulse tool family combines our legendary durability with our customer's increasing demands for productivity.

Industry first motor design and revolutionary preventative maintenance distance the new D Series from the competition. With outstanding ergonomics, you'll never want to put this tool down.

D Series redefines productivity by performing the job faster and staying on the job longer.

Designed to assemble products where quality, high production and efficiency are paramount, these tools prove their value over and over. Consistent performance, unmatched durability and ease of use and maintenance make these tools the tools of choice.

■ Broad Tool Selection


With a variety of shut-off and nonshut-off pulse tools to choose from you're sure to find just the right Cleco pulse tool for the job.



3X Increase Between Oil Changes

- Adjustable pulse chamber volume
- Tool achieves full torque after preventative maintenance
- No special tools required

The average tool is out of service almost 20 minutes for maintenance of hydraulic impulse unit.




Average Tool

With Cleco's patented design, maintenance time is only 2 minutes!



New Cleco D Series

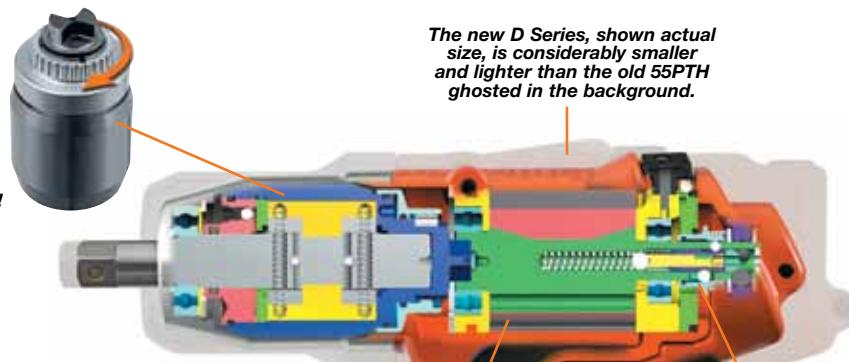


Inertial Shut-off System.

- Onboard shut-off simplifies pulse unit
- Inertial shut-off removes variability due to pulse fluid

Low Vibration Levels

Double chamber hydraulic units and 3-chamber motors mean extremely low vibration levels are achieved. This aids in preventing Cumulative Trauma Disorders (CTDs).



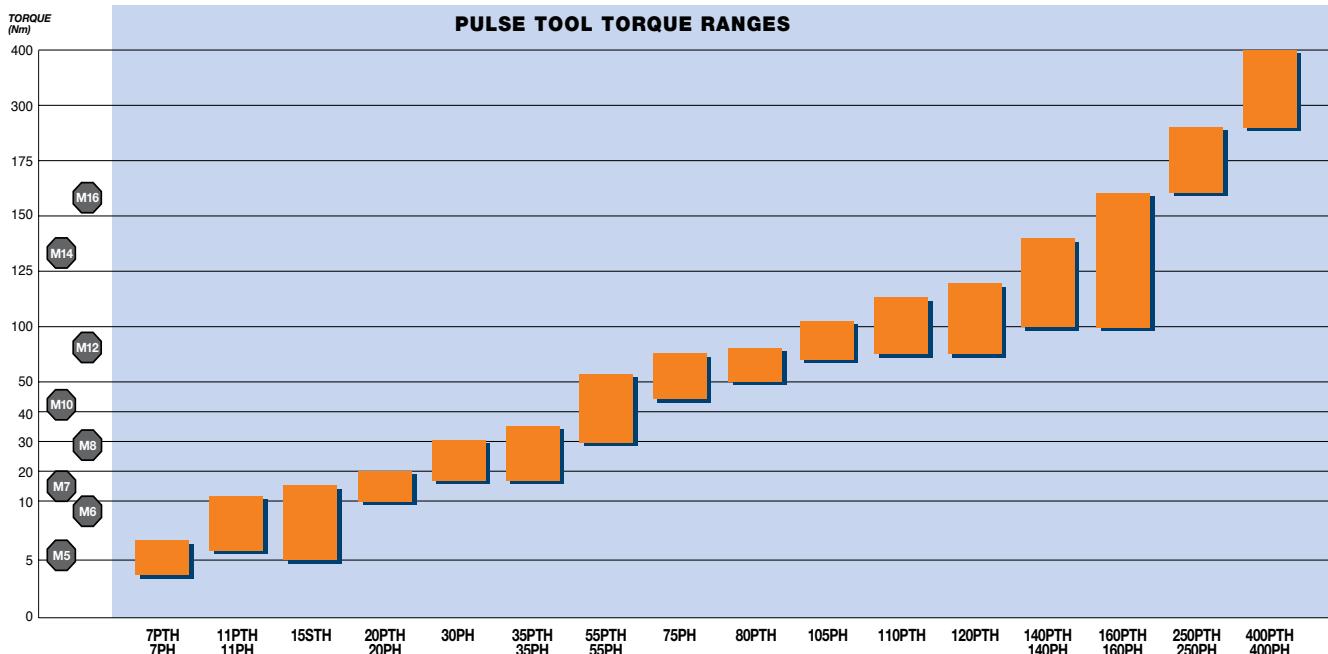

Low Noise Levels

Noise levels of these tools are well below standard air tools for an operator-friendly environment. There is no loud metallic hammering under load.



Ships Ready For Error Proofing

- Works with existing TVP torque verifier
- Located near air inlet to maximize ergonomics



Standard air signal indicating tool shutoff for use with Cleco TVP Error Proofing System.

Easy Set-Up

- Insert 2mm hex into rear port of tool
- Positive stops in both directions to prevent loss and/or damage



Adjustable Motor Speed

- Easily adjustable motor speed to insure accuracy on hard joints
- Can be locked in place to prevent accidental adjustment



Pulse Nutrunners

Hydraulic Pulse Shut-Off & Non Shut-Off

Cleco®

D-Series

Torque Range: Bolt Size:
6 - 120 Nm M5 - M12
4.4 - 88.5 Ft. Lbs #10 - 1/2"

- Inertia shut-off
- External torque adjustment
- External speed control
- Reversible
- Torque signal port
- Adjustable pulse unit volume simplifies maintenance
- Oilless blades 



C-Series PTH & STH

Torque Range: Bolt Size:
100 - 400 Nm M12 - M20
74 - 295 Ft. Lbs 1/2" - 3/4"

- Hydraulic pulse shut-off
- Motor governor equipped
- External torque adjustment
- External speed control
- Reversible
- Oilless blades 
- Torque signal port



C-Series PH Non-Shut-Off

Torque Range: Bolt Size:
4 - 400 Nm M5 - M18
3 - 295 Ft. Lbs #10 - 3/4"

- External speed control
- Reversible
- Oilless blades 

Model Number Nomenclature

120	P	T	H	L	F	D	55	4	
Maximum Torque Output 7 - 400 Nm							Vintage	RPM x 100	Output Termination
Tool Configuration P - Pistol S - Inline									Q - Quick-change 2 - 1/4" Sq. Dr. 3 - 3/8" Sq. Dr. 4 - 1/2" Sq. Dr. 6 - 3/4" Sq. Dr.
Torque Control (-) - Non-Shut-Off T - Air Shut-Off							Pulse Control*		
Torque Delivery H - Hydraulic							(-) - Non-Frequency F - Frequency		
							*Not available in D vintage.		
							Handle Size*		
							(-) - Normal L - Large		
							*Not available in D vintage.		

Model Number	Drive Type*	Torque Range		Free Speed	Weight*		Air Consumption		
		Ft.Lbs.	Nm		RPM	Ibs.	kg	NPT	Hose I.D.
D-Series – Pistol Grip – Shut-off Models									
11PTH65Q	1/4" QC	4.4-8.1	6-11	6500	1.87	0.85	1/4"	3/8"	12.3
11PTH652	1/4" Sq.Dr.	4.4-8.1	6-11	6500	1.87	0.85	1/4"	3/8"	12.3
11PTH653	3/8" Sq.Dr.	4.4-8.1	6-11	6500	1.87	0.85	1/4"	3/8"	12.3
20PTH75Q	1/4" QC	7.3-14.7	10-20	7500	1.92	0.87	1/4"	3/8"	12.3
20PTH753	3/8" Sq.Dr.	7.3-14.7	10-20	7500	1.90	0.86	1/4"	3/8"	12.3
35PTH65Q	1/4" QC	14.7-25.8	20-35	6500	2.2	1.0	1/4"	3/8"	16.0
35PTH653	3/8" Sq.Dr.	14.7-25.8	20-35	6500	2.2	1.0	1/4"	3/8"	16.0
55PTH603	3/8" Sq.Dr.	22.1-40.5	30-55	6000	2.4	1.1	1/4"	3/8"	19.0
80PTH60Q	7/16" QC	36.9-59.0	50-80	6000	3.2	1.45	1/4"	3/8"	19.0
80PTH604	1/2" Sq.Dr.	36.9-59.0	50-80	6000	3.1	1.4	1/4"	3/8"	19.0
110PTH55Q	7/16" QC	55.3-81.1	75-110	5500	3.75	1.7	3/8"	1/2"	30.0
120PTH554	1/2" Sq.Dr.	55.3-81.1	75-120	5500	3.75	1.7	3/8"	1/2"	30.0
C-Series – Pistol Grip – Shut-off Models									
140PTHC25Q	7/16" QC	74-103	100-140	2500	5.7	2.6	3/8"	1/2"	25.4
160PTHC256	3/4" Sq.Dr.	74-118	100-160	2500	5.7	2.6	3/8"	1/2"	25.4
C-Series – Pistol Grip – Shut-off Models – Trigger Throttle									
250PTHFC226	3/4" Sq.Dr.	118-184	160-250	2200	8.8	4.0	3/8"	1/2"	33.5
400PTHFC206	3/4" Sq.Dr.	185-295	250-400	2000	11.7	5.3	3/8"	1/2"	33.5
C-Series – In-Line – Push-to-Start									
7STHFA55Q	1/4" QC	1.9-4.9	2.6-6.6	5500	1.8	0.83	1/8"		7.0
35STHFA40Q	7/16" QC	12-26	15-35	4000	3.1	1.4	1/4"	3/8"	15.9
35STHFA404	1/2" Sq.Dr.	12-26	15-35	4000	2.9	1.3	1/4"	3/8"	15.9
C-Series – In-Line – Lever									
7STHFC55Q	1/4" QC	1.9-4.9	2.6-6.6	5500	2.1	0.93	1/8"		7.0
15STHFC40Q	1/4" QC	3.6-11	5.0-15	4000	2.4	1.1	1/4"	3/8"	16.5
35STHFC40Q	7/16" QC	12-26	15-35	4000	3.3	1.5	1/4"	3/8"	15.9
35STHFC404	1/2" Sq.Dr.	12-26	15-35	4000	3.3	1.5	1/4"	3/8"	15.9
15STHFC40Q	1/4" QC	3.6-11	5.0-15	3000	2.4	1.1	1/4"	3/8"	16.5

(*) Approximate values. Some variance may occur between square and Q drives.

General:
Tool performance rated @ 87 psi (6 bar) air pressure.

Standard Equipment:
Suspension bail and torque adjusting wrench.
Torque signal port (pistol grip models only)

Optional Equipment:
Additional accessories: Page 62

Model Number	Drive Type*	Torque Range		Free Speed	Weight*		Air Consumption		
		Ft.Lbs.	Nm		RPM	Ibs.	kg	NPT	Hose I.D.
C-Series – Pistol Grip – Non-Shut-off Models									
7PHL90Q	1/4" QC	3.0-5.2	4-7	9000	1.8	0.8	1/4"	3/8"	8.8
11PHL80Q	1/4" QC	4.4-8.1	6-11	8000	1.9	0.9	1/4"	3/8"	8.8
11PHL802	1/4" Sq.Dr.	4.4-8.1	6-11	8000	1.9	0.9	1/4"	3/8"	8.8
20PHL70Q	1/4" QC	7.4-14	10-20	7000	2.3	1.1	1/4"	3/8"	15.9
20PHL703	3/8" Sq.Dr.	7.4-14	10-20	7000	2.3	1.1	1/4"	3/8"	15.9
30PHL70Q	1/4" QC	13-22	17-30	7000	2.6	1.2	1/4"	3/8"	15.9
35PHL703	3/8" Sq.Dr.	13-26	17-35	6500	2.6	1.2	1/4"	3/8"	15.9
55PHL60Q	7/16" QC	22-40	30-55	6000	3.7	1.7	1/4"	3/8"	21.2
55PHL604	1/2" Sq.Dr.	22-40	30-55	6000	3.7	1.7	1/4"	3/8"	21.2
75PHL50Q	7/16" QC	33-55	45-75	5000	4.0	1.8	1/4"	3/8"	19.4
75PHL504	1/2" Sq.Dr.	33-55	45-75	5000	4.0	1.8	1/4"	3/8"	19.4
105PH55Q	7/16" QC	52-77	70-105	5500	5.3	2.4	3/8"	1/2"	24.7
105PH554	1/2" Sq.Dr.	52-77	70-105	5500	5.3	2.4	3/8"	1/2"	24.7
140PH45Q	7/16" QC	74-103	100-140	4500	5.7	2.6	3/8"	1/2"	31.7
160PH456	3/4" Sq.Dr.	74-118	100-160	4500	5.7	2.6	3/8"	1/2"	31.7
250PHF406	3/4" Sq.Dr.	118-184	160-250	4000	8.6	3.9	3/8"	1/2"	40.6
400PHF356	3/4" Sq.Dr.	184-295	250-400	3500	11.5	5.2	3/8"	1/2"	42.3

(*) Approximate values. Some variance may occur between square and Q drives. For 7-75 Series Models, small handle can be ordered by substituting "S" for "L" in model number.

General:
Tool performance rated @ 87 psi (6 bar) air pressure.

Standard Equipment:
Suspension bail and torque adjusting wrench.

Optional Equipment:
Additional accessories: Page 60

Pulse Tool Accessories

D Series Maintenance Items

Pulse Tool	Pulse Unit	Air Motor	Pulse Repair Kit	Motor Repair Kit	Filler Connector
7PTHD602	935953	935955	935717	935957	931968
7PTHD60Q	935952	935955	935717	935957	931968
11PTHD75Q	935701	935958	935717	935716	931968
11PTHD752	935700	935958	935717	935716	931968
11PTHD753	935702	935958	935717	935716	931968
20PTHD75Q	935703	935687	935717	935716	931968
20PTHD753	935704	935687	935717	935716	931968
35PTHD65Q	935485	935408	935495	935494	931968
35PTHD653	935484	935408	935495	935494	931968
55PTHD603	935483	935408	935493	935492	931968
80PTHD60Q	935640	935635	935656	935655	935718
80PTHD604	935641	935635	935656	935655	935718
110PTHD55Q	935642	935657	935654	935653	935718
120PTHD554	935643	935657	935654	935653	935718

Rubber Tool Stand



Part Number	Tool Series
931041 (one piece)	C Series 7PTH – 105PTH/PH D Series 7PTH – 120PTH
930119 (two pieces)	C Series 140/160PTH/PH/ 250PTH / 400PTH



Hydraulic Oil

Part Number	Container Size
539317	One Quart

Torque Signal Kit

Air signal to indicate shut-off.

Part Number	Tool Series
934918	PTH series pulse tools (C & D vintage shut-off tools only)

7/16" Quick Change Chuck Adapter

Part Number	Tool Series
935472	To convert 55PTHD603 to a Quick-Change chuck

Hydraulic Filler Unit

Part Number			C Series Tools
Filler Unit Only	Connector Only	Filler Unit Complete	
928483	931968	542523	7/11PTH/PH/SH 20/35PTH/PH/SH
928483	932072	928477	55/75PTH/PH 105/140/160PTH/PH



Covers


Part Number	Fits Model
544074-1	11PTHD, 20PTHD
544074-2	35PTHD, 55PTHD
544074-3	90PTHD, 110PTHD, 120PTHD



Impact Wrenches

Cleco®

Telescopic Impact Wrenches



Positive Lock Socket Retainer

With the positive lock socket retainer, sockets snap on... and stay on until released. Offered on spline drives, the retainer can be serviced without disassembling the tool.

Exclusive through-bolt construction reduces replacement costs

Steel front end/motor housing/handle are clamped together by four high-strength steel bolts. This exclusive feature provides better tool performance, eliminates stripped threads and loose inserts in motor housing.



Positive oil-foam lubrication system reduces major cause of impact wrench maintenance.


Cleco impact wrenches feature a unique oil-foam bath that provides positive lubrication for the hammer, anvil and other working parts.



The system is designed so that if the impact mechanism runs low on 30 wt. oil, the tool will stop running, thus eliminating one of the major causes of impact wrench failure ... lack of lubrication. By simply refilling the oil reservoir, the tool can be returned to service. Other impact wrenches soon throw off grease; run dry causing extra wear that shortens tool life and increases maintenance cost.

Proven heavy-duty telescoping impact mechanism adds power...cuts weight... reduces shock to the operator.


The smooth-hitting Cleco telescopic impact mechanism has only three major parts - hammer, anvil and rotor... providing

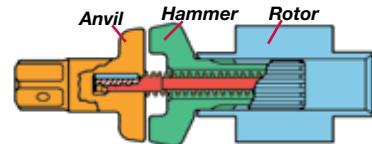

more power directly to the fastener. The hammer is splined to the inside of the motor, which then impacts directly on the anvil, delivering more power per blow.

Other important features include:

- Comfortable grip handle
- Outside, inside triggers and pistol grip models
- Multiposition dead handle, and spade type "D" handle available
- Throttle can be feathered for speed control
- Simple face-type reversing valve simplifies maintenance
- Forged hammer and anvil for greater durability
- Rotor bearings and steel motor end plates fit either end of motor, reducing spare parts inventory and repair time.

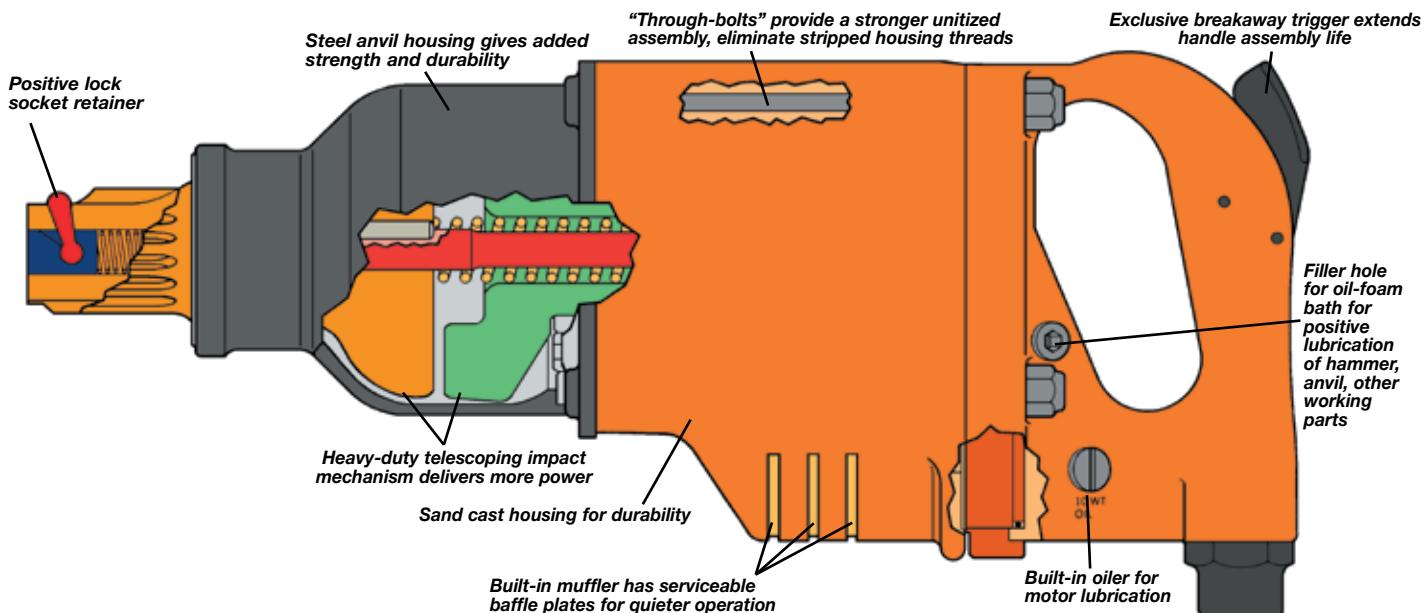

Bolt Selection Chart

Cleco®

The Impact Wrench Bolt Selection Chart will assist you in selecting impact wrenches for specific applications. Torque and tension figures are based on 70% of the proof load of a given size and grade UNC bolt. Torque values are based on non-lubricated (dry) conditions. Bolt grades and sizes are those which are the most commonly secured with impact wrenches.

SAE Grade 1

Bolt Diameter		1/4"	5/16"	3/8"	7/16"	1/2"	9/16"	5/8"	3/4"	7/8"	1"	1-1/8"	1-1/4"	1-3/8"	1-1/2"	1-5/8"	1-3/4"
Torque	Ft.-lb. Nm	3 4.1	6 8.1	11 15	18 24	28 38	43 58	55 75	97 132	155 210	230 312	340 460	480 650	660 900	860 1,170	- -	- -
Tension	lb. kN	730 3.24	1,210 5.38	1,800 8.0	2,460 10.9	3,280 14.6	4,200 18.7	5,200 23.1	7,000 31.1	10,000 47.1	14,000 62.3	18,200 81	23,000 102	28,000 126	34,600 154	- -	- -
W-200	1/2" sq. 3/8" sq.	WP-455	1/2" sq.	WP-2050 & WP-2049	3/4" sq. 5/8" sq.	WP-2060 & WP-2059	1" sq. & #4 spline 3/4 sq.	W-2110 & W-2109	#5 spline 1" sq.	W-2120 & W-2119	#5 spline 1-1/2" sq.	#5 spline	#5 spline	#5 spline	#5 spline	#5 spline	

SAE Grade 5

Bolt Diameter		1/4"	5/16"	3/8"	7/16"	1/2"	9/16"	5/8"	3/4"	7/8"	1"	1-1/8"	1-1/4"	1-3/8"	1-1/2"	1-5/8"	1-3/4"
Torque	Ft.-lb. Nm	8 10.8	16 21.7	28 38	46 62	70 95	110 149	140 190	250 340	405 550	600 810	770 1,040	1,080 1,460	1,470 1,930	1,950 2,640	- -	- -
Tension	lb. kN	1,900 8.4	3,100 13.8	4,600 20.4	6,350 28.2	8,450 37.6	10,900 48.5	13,500 60	20,000 89	27,400 122	36,000 160	41,000 182	52,000 231	64,000 285	77,000 342	- -	- -
W-200	1/2" sq. 3/8" sq.	WP-455	1/2" sq.	WP-2050 & WP-2049	3/4" sq. 5/8" sq.	WP-2060 & WP-2059	1" sq. & #4 spline 3/4 sq.	W-2110 & W-2109	#5 spline 1" sq.	W-2120 & W-2119	#5 spline 1-1/2" sq.	#5 spline	#5 spline	#5 spline	#5 spline	#5 spline	

SAE Grade 8 / ASTM-A354 Grade BD

Bolt Diameter		1/4"	5/16"	3/8"	7/16"	1/2"	9/16"	5/8"	3/4"	7/8"	1"	1-1/8"	1-1/4"	1-3/8"	1-1/2"	1-5/8"	1-3/4"
Torque	Ft.-lb. Nm	11 14.9	23 31.2	40 54.2	65 88	99 134	159 216	198 268	350 475	566 767	848 1,150	1,245 1,690	1,750 2,370	2,375 3,220	3,135 4,250	- -	- -
Tension	lb. kN	2,740 12.2	4,400 19.6	6,510 28.9	8,930 39.7	11,920 53	15,290 68	18,980 84.4	28,050 125	38,800 172	50,900 226	66,360 295	84,000 374	103,570 461	125,330 557	- -	- -
W-200	1/2" sq. 3/8" sq.	WP-455	1/2" sq.	WP-2050 & WP-2049	3/4" sq. 5/8" sq.	WP-2060 & WP-2059	1" sq. & #4 spline 3/4 sq.	W-2110 & W-2109	#5 spline 1" sq.	W-2120 & W-2119	#5 spline 1-1/2" sq.	#5 spline	#5 spline	#5 spline	#5 spline	#5 spline	

ASTM A325*

Bolt Diameter		1/4"	5/16"	3/8"	7/16"	1/2"	9/16"	5/8"	3/4"	7/8"	1"	1-1/8"	1-1/4"	1-3/8"	1-1/2"	1-5/8"	1-3/4"
Torque	Ft.-lb. Nm	1						200 271	355 481	570 773	850 1,150	1,060 1,440	1,495 2,030	1,960 2,660	2,600 3,530	- -	- -
Tension	lb. kN							10,000 44.5	28,000 124	39,000 173	51,000 227	56,000 249	71,000 316	85,000 378	103,000 458	- -	- -
WP-2050	3/4" sq.	WP-2060	1" sq. 7 #4 spline	WS-2110	#5 spline	WS-2120	#5 spline	WS-2120	#5 spline	WS-2120	#5 spline	WS-2120	#5 spline	WS-2120	#5 spline		

ASTM A490*

Bolt Diameter		1/4"	5/16"	3/8"	7/16"	1/2"	9/16"	5/8"	3/4"	7/8"	1"	1-1/8"	1-1/4"	1-3/8"	1-1/2"	1-5/8"	1-3/4"
Torque	Ft.-lb. Nm	1						250 339	435 590	715 970	1,070 1,451	1,580 2,125	2,125 2,882	2,780 3,770	3,700 5,020	- -	- -
Tension	lb. kN							24,000 107	35,000 156	49,000 218	64,000 285	80,000 356	102,000 454	121,000 538	148,000 658	- -	- -
WP-2050	3/4" sq.	WP-2060	1" sq. 7 #4 spline	WS-2110	#5 spline	WS-2120	#5 spline	WS-2120	#5 spline	WS-2120	#5 spline	WS-2120	#5 spline	WS-2120	#5 spline		

*Note: ASTM-325 and ASTM A490 bolts are used on structural steel applications. Torque and tension values are based on running the nut beyond the proof load of the bolt by the turn-of-the-nut method. For detailed information, consult the bolt manufacturer.

Impact Wrenches

Inline, Pistol Grip & Spade Handle

Cleco®

WL & WP Series

Torque Range: Bolt Size:
20 - 2450 Nm M10 – M30
15 - 1800 Ft. Lbs 7/16" – 1 1/2"

- Lever and trigger start
- Reverse or forward bias
- 6" extended and spline drives available



WT Series Spade Handle

Torque Range: Bolt Size:
1000 - 4000 Nm M30 – M36
750 - 3000 Ft. Lbs 1 3/8" – 1 1/2"

- Inside or outside lever
- Positive lock socket retainer (spline drive)
- Multiposition dead handle
- Oil foam bath
- Reverse or forward bias



Model Number	Bolt Size		Square Drive	Recommended Torque Range		Impacts per Minute	Free Speed RPM	Length		Weight		Side to Center		Air Consumption		
	Gr. 5	Gr. 9.8		in.	ft.-lbs.			in.	mm	lbs.	kg	in.	mm	NPT	Hose I.D.	SCFM
	in.	mm														

Inline – Lever Start

WL-200-BQ	7/16	M10	7/16*	15-50	20-68	3,200	3,000	8.5	216	3.1	1.4	1	25	1/4"	1/4"	18
WL-200-3	7/16	M10	3/8	15-50	20-68	3,200	3,000	8.5	216	3.1	1.4	1	25	1/4"	1/4"	18
WL-200-4	1/2	M10	1/2	15-60	20-81	3,200	3,000	8.5	216	3.4	1.5	1	25	1/4"	1/4"	18

Pistol Grip – Trigger Start

WP-255-3P	7/16	M10	3/8	60-75	80-100	1,150	9,500	5.7	145	2.6	1.2	1	25	1/4"	1/4"	30
WP-455-4R	1/2	M20	1/2	37-370	50-502	1,400	6,500	7	176	5.3	2.4	–	–	1/4"	1/4"	40
WP-455-4P***	1/2	M20	1/2	37-370	50-502	1,400	6,500	7	176	5.3	2.4	–	–	1/4"	1/4"	40
WP-2050-6	7/8	M20	3/4	125-600	170-800	1,000	6,000	6.4	162	7.8	3.5	1.6	42	3/8"	3/8"	45
WP-2060B-6	1 1/8	M24	3/4	250-700	350-950	1,000	4,000	7.8	197	12	5.4	1.8	46	3/8"	3/8"	60
WP-2060B-8	1 1/8	M24	1	250-900	350-1200	1,000	4,000	7.8	197	12.1	5.5	1.8	46	3/8"	3/8"	60
WP-2110B-8	1 3/8	M30	1	750-1650	1000-2250	880	4,600	9.5	241	20.8	9.4	2.2	56	1/2"	3/8"	100

Pistol Grip – Trigger Start – Biased Reverse Power****

WP-2049-6	7/8	M20	3/4	125-550	170-750	1,000	6,200	6.4	162	7.8	3.5	1.6	42	3/8"	3/8"	45
WP-2059-6	1 1/8	M24	3/4	250-700	350-950	1,000	4,000	7.8	197	12	5.4	1.8	46	3/8"	3/8"	60
WP-2059-8	1 1/8	M24	1	250-800	350-1100	1,000	4,000	7.8	197	12.1	5.5	1.8	46	3/8"	3/8"	60
WP-2059-8-6E**	1 1/8	M24	1	250-750	350-1000	1,000	4,000	13.8	350	14.3	6.5	1.8	46	3/8"	3/8"	60
WP-2109B-8	1 3/8	M30	1	750-1650	1000-2250	880	4,300	9.5	241	20.8	9.4	2.2	56	1/2"	3/8"	100
WPS-2109B	1 3/8	M30	#5 Spl.	750-1800	1100-2450	880	4,300	9.8	248	21.3	9.6	2.2	56	1/2"	3/8"	100

* Quick change chuck

** 6" Extended spindle

*** Pin retainer

****Breakaway torque capacity in reverse:

2049 Series: 750 ft-lbs. (1000 Nm)

2059 Series: 1200 ft-lbs. (1600 Nm)

2109 Series: 2500 ft-lbs. (3400 Nm)

General:

Tool performance rated at 90 psi (620kPa) air pressure.

Optional Equipment:

86909 Suspension bail for WL-200.

Additional accessories: Pages 68-73

Standard Equipment:

Operating instructions & service manual

Model Number	Suitable for Bolt Size		Square Drive	Recommended Torque Range		Impacts Per Minute	Free Speed RPM	Length		Weight		Side to Center		Air Consumption		
	Inside Trigger	Outside Trigger		in.	mm			in.	mm	lbs.	kg	in.	mm	NPT	Hose I.D.	SCFM
WT-2110-8	1 1/2	M30	1	750-1650	1000-2250	880	4,600	12.9	327	21	9.5	2.2	56	1/2"	1/2"	100

WTS-2120	1 1/2	M36	#5 Spl.	1200-2800	1600-3800	850	3,300	14.3	362	27.6	12.5	2.3	59	1/2"	5/8"	105	
WT-2120-12	W-2120-12	1 1/2	M36	1 1/2	1200-3000	1600-4000	850	3,300	14.3	362	27.6	12.5	2.3	59	1/2"	5/8"	105

Trigger Start - Spade Handle - Biased Reverse Power**

WT-2109-8	W-2109-8	1 3/8	M30	1	750-1650	1000-2250	880	4,300	12.9	327	21	9.5	2.2	56	1/2"	1/2"	100
WTS-2109		1 3/8	M30	#5 Spl.	800-1800	1100-2450	880	4,300	13.1	333	21.5	9.8	2.2	56	1/2"	1/2"	100
WT-2119-12		1 1/2	M36	1 1/2	1200-2600	1600-3500	820	3,300	14.3	362	29	13.1	2.3	59	1/2"	5/8"	105
WTS-2119	WS-2119	1 1/2	M36	#5 Spl.	1200-2500	1600-3400	820	3,300	14.3	362	29	13.1	2.3	59	1/2"	5/8"	105

*6" Extended spindle

**Breakaway torque capacity in reverse:

2109 Series: 2500 ft-lbs. (3400 Nm)

2119 Series: 3500 ft-lbs. (4700 Nm)

Standard Equipment:

Operating instructions & service manual

Dead handle bracket

Dead Handle

Optional Equipment:

Additional accessories: Pags 66-71

General:
Tool performance rated at 90 psi (620kPa) air pressure.

General Accessories

Balancers



Ergonomic Tool Balancers


Capacity:

0.5 - 20.5 kg
1.0 - 45 Lbs.


External tension adjustment

■ 360° Swivel


■ Retracting in-line cable



Light Duty (PL Series)



Light Duty (BL Series)



Medium & Heavy Duty

Model Number	Lock Feature	Capacity		"A"		"B"		"C"		Weight	
		lbs.	kg	in.	mm	in.	mm	in.	mm	lbs.	kg
Light Duty - 4.6 ft. (1.4m) Cable Travel											
PL-12A	-	12.0-1.0	5.5-0.5	6.8	171	5.1	130	2.3	58	-	-
Light Duty - 5.0 ft. (1.5m) Cable Travel											
200427	-	2.0-0	.9-0	10.9	277	4.4	112	1.6	41	1.3	0.6
200428	-	4.0-2.0	1.8-.9	10.9	277	4.4	112	1.6	41	1.3	0.6
200429	-	5.0-3.0	2.3-1.4	10.9	277	4.4	112	1.6	41	1.3	0.6
Light Duty - 5.2 ft. (1.6m) Cable Travel											
BL-2A	-	2.0-1.0	0.9-0.5	10.4	263	4.0	102	2.2	56	1.1	0.5
BL-4A	-	4.0-2.0	1.8-0.9	10.4	263	4.0	102	2.2	56	1.1	0.5
Light Duty - 6.7 ft. (2.0m) Cable Travel											
BL-6A	-	6.0-4.0	2.7-1.8	12.9	327	5.5	140	3.1	79	3.3	1.5
BLL-6A	Ratchet	6.0-4.0	2.7-1.8	12.9	327	5.5	140	3.1	79	3.3	1.5
BL-8A	-	8.0-6.0	3.6-2.7	12.9	327	5.5	140	3.1	79	3.3	1.5
BLL-8A	Ratchet	8.0-6.0	3.6-2.7	12.9	327	5.5	140	3.1	79	3.3	1.5
Medium Duty - 6.6ft. (2.0m) Cable Travel											
BM-13A	Automatic	13-9.0	5.9-4.1	13.8	350	6.9	175	4.5	114	9.0	4.1
BML-13A	Automatic/Ratchet	13-9.0	5.9-4.1	13.8	350	6.9	175	4.5	114	9.0	4.1
BM-18A	Automatic	18-13	8.2-5.9	13.8	350	6.9	175	4.5	114	9.0	4.1
Medium Duty - 6.0ft. (1.8m) Cable Travel											
BM-25A	Automatic	25-18	11.4-8.2	20.7	527	7.8	197	6.6	169	19	8.6
BM-35A	Automatic	35-25	15.9-11.4	20.7	527	7.8	197	6.6	169	19	8.6
BM-45A	Automatic	45-35	20.5-15.9	20.7	527	7.8	197	6.6	169	19	8.6

Air Hoses

Part Number	Hose I.D.		Fittings (NPT)		Length	
	in.	mm	in.	mm	ft.	m
A139856	3/16	4.7	1/8	1/8	6.0	1.8
45-1307	3/16	4.7	1/8	1/4	7.0	2.1
45-1408	1/4	6.4	1/4	1/4	8.0	2.4
45-1409	1/4	6.4	1/8	1/4	8.0	2.4
45-1508	5/16	7.9	1/4	1/4	8.0	2.4
45-1610	3/8	9.5	3/8	3/8	10	3.0
45-1810	1/2	12.7	3/8	1/2	10	3.0
45-1812	1/2	12.7	1/2	1/2	12	3.7
45-1825	1/2	12.7	1/2	1/2	25	7.6

General: 3/16" & 1/4" hoses have braided covers, all others have neoprene covers.

Note: 3/8"-24 is a straight thread



Activeswivel

Part No.	NPT in.	Air Flow		Max. Pressure		Weight	
		SCFM	m³/min	psig	bar	lbs.	kg
SW-102	1/4	25	7.1	150	10.4	0.20	0.09
SW-103	3/8	45	12.7	150	10.4	0.40	0.18
SW-104	1/2	65	18.4	150	10.4	0.80	0.36
SWR-102*	1/4	25	7.1	150	10.4	0.25	0.11

* NOTE: Equipped with built-in flow regulator.

Quick Disconnect Fittings

Fitting Type*	NPT in.	Nominal Size		
		1/4"	3/8"	1/2"
Coupler (male NPT)	1/8	45-0710	-	-
	1/4	45-0711	45-0713	-
	3/8	45-0712	-	-
	1/2	-	-	45-0717
Coupler (female NPT)	1/4	-	-	-
	3/8	45-0732	45-0734	45-0736
Nipple (male NPT)	1/8	45-0720	-	-
	1/4	-	45-0724	-
	3/8	45-0722	45-0725	45-0726
	1/2	-	-	45-0727
Nipple (female NPT)	1/4	-	45-0744	-
	3/8	45-0742	45-0745	45-0746
	1/2	-	-	45-0747
Nipple (with hose barbs)	1/4**	45-0748	-	-
	1/2**	-	-	45-0753

* NOTE: Nipples of one size will not fit couplers of another size.

** NOTE: Indicates inside diameter of hose.

NOTE: 1/4" nominal will pass 49 cfm free air @ 90 psi, but pressure drop exceeds 10 psi with air flow over 30 cfm.

3/8" nominal will pass 90 cfm free air @ 90 psi, but pressure drop exceeds 10 psi with air flow over 53 cfm.

1/2" nominal will pass 168 cfm free air @ 90 psi, but pressure drop exceeds 10 psi with air flow over 109 cfm.

Lubricants

Part Number	Size	Description	M.S.D.S. No.
Oils			
540397	1 qt. plastic	Air line oil	CPT-153
533485	1 gal. metal	Air line oil	CPT-153
536333	1 gal. metal	High film strength	CPT-154
45-0918	1 qt. plastic	Air line oil (Dotco)	CPT-155
45-0919	1 gal. metal	Air line oil (Dotco)	CPT-155
539317	1 qt. plastic	Hydraulic oil (Pulse)	CPT-157
Greases			
513156	18 oz. can	Teflon grease	CPT-145
540394	2.8 oz. tube	Teflon grease	CPT-145
45-0983	2 oz. tube	Dotco gear grease	CPT-147
45-0980	2 oz. tube	Dotco gear lube	CPT-148

NOTE: Under normal conditions of use, lubrication products sold separately for or used within these tools should not cause an exposure hazard.

Refer to the Material Safety Data Sheet (M.S.D.S.) for Safety and Disposal information. M.S.D.S. sheets shown in the chart are available upon request from Cooper Tools.

Push Type Grease Gun

Part Number: 45-1982



General Accessories

Apex Fastener Tools



Quality Fastener Tools

For more than half a century Apex has maintained the position of world leader in industrial fastening tools. Many power and insert bits, socket combinations and other drivers/adapters pioneered by Apex have today become industry standards, while Apex quality, service and selection give you unsurpassed value.

More Quality For Your Money

Apex quality starts with the selection of raw materials. Only carefully chosen, high grade tool steel is used to make Apex industrial fastener tools. Next, each tool is precision machined from solid bar stock to exacting standards of accuracy. You always get a snug, secure fit – a fit that is not possible from stamped tools.

Finally, each Apex fastener tool is tempered with our exclusive heat treating process. During this step the degree of hardness is determined based upon the application.

Fast Delivery


All Apex standard catalog items are available off-the-shelf for immediate delivery. If you need special assistance with your order, your Apex manufacturer's representative can handle any questions you may have.

Special Orders

Apex offers the broadest selection of screw driver and nut runner tools available, from bits, sockets and universal wrenches to extensions, adapters and nut setters. If you have a special application, contact your Apex representative. We may have what you need in stock, or can design and produce special fastener tools for almost any application.

Ordering Information

Apex products are distributed world-wide. For a catalog of the complete line of Apex quality fastener tools or to locate your nearest Apex distributor, visit our website at www.apex-tools.com.

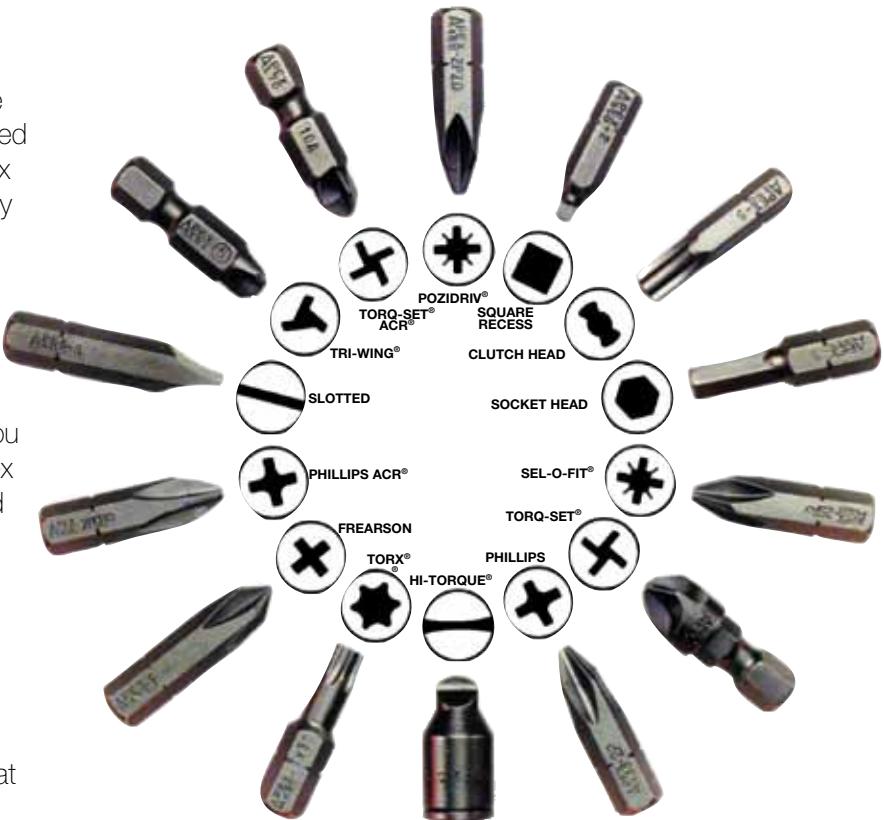

Insert Bits


(1/4" hex for socket head cap screws and set screws)



Part Number	Hex Size (in.)	"A"		Cap Screw	Set Screw
		in.	mm		
185-00	1/16	1.00	25.4	1	5.6
185-0	5/64	1.00	25.4	2.3	8
185-1	3/32	1.00	25.4	4.5	10
185-9	7/64	1.00	25.4	6	—
185-2	1/8	1.00	25.4	8	1/4
185-10	9/64	1.00	25.4	8	—
185-3	5/32	1.31	33.3	10	5/16
185-4	3/16	1.31	33.3	1/4	3/8
185-5	7/32	1.31	33.3	—	7/16
185-6	1/4	1.31	33.3	5/16	1/2
185-7	5/16	1.25	31.8	3/8	5/8
185-8	3/8	1.25	31.8	7/16, 1/2	3/4

Square Drive Adapter

(1/4" hex drive sockets) Use with Quick Change and Bit & Finder Models, except as noted.



Part Number	"A"	"B"		Bushing Number
		Sq. Drive	in.	mm
EX250-2	1/4	2.00	50.8	—
EX250-3	1/4	3.00	76.2	847295*
EX250-4	1/4	4.00	101.6	—
EX250-6	1/4	6.00	152.4	—
EX370	3/8	1.63	41.3	—
EX370-3	3/8	3.00	76.2	847295*
EX500-2	1/2	2.00	50.8	—
EX500-3	1/2	3.00	76.2	—

*Note: Required for bit and finder models.

Hex Extensions

Part Number	Hex Drive (in.)	Type of Lock	Overall Length	
			in.	mm

Male Hex Drive with 1/2" Male Square

EX-501-3	7/16	Pin	3	76
EX-501-4	7/16	Pin	4	102
EX-501-6	7/16	Pin	6	152

**Male Hex Drive with 3/8" Male Square**

EX-371-3	7/16	Pin	3	76
EX-371-4	7/16	Pin	4	102
EX-371-6	7/16	Pin	6	152

**Hex Drive Nutsetters**

Part Number	Size (in.)	Overall Length (in.)	Socket Nose Diameter (in.)
-------------	------------	----------------------	----------------------------

7/16" 6 Point

6N-1416-3	1/2	3	13/16
6N-1416-4	1/2	4	13/16
6N-1418-3	9/16	3	7/8
6N-1418-4	9/16	4	7/8
6N-1420-3	5/8	3	1
6N-1420-6	5/8	6	1

**Insert Bits**Used with Bit Holders
(all bits are 1.0" (25.4 mm) long)

Point Size	Part Number		Wood		Machine & Self-Tapping			
	Phillips	Pozi-Drive	Flat & Oval	Round	Flat, Oval & Pan	Fillister	Truss	Binding
0	446-0	446-1P2D	0.1	0.1	0.1	0.1	0.1	0.1
1	HPL-1	440-1PZD	2-4	2-4	2-4	2-4	2-4	2-4
2	HPI-2	440-2PZD	5-8	5-10	5-10	5-10	6-10	5-10
3	HPI-3	440-3PZD	10-16	12-16	12-16	12-5/16	12-16	12-1/4

6 Point Sockets

Part No.	Hex Opening	Overall Length	Nose End Diameter	Drive End Diameter	Opening Depth
----------	-------------	----------------	-------------------	--------------------	---------------

3/8" Square Drive Sockets, SAE

3112	3/8	1 1/4	19/32	3/4	1/4
3114	7/16	1 1/2	11/16	3/4	9/32
3116	7/16	1/2	1 1/2	13/16	11/32
3118	7/16	9/16	1-1/2	7/8	7/16

**1/2" Square Drive Sockets, SAE**

5112	3/8	1 1/2	5/8	15/16	1/4
5114	7/16	1 1/2	11/16	15/16	9/32
5116	1/2	1 1/2	13/16	15/16	11/32
5120	5/8	1 1/2	1	1	7/16
5122	11/16	1 1/2	1 1/8	1 1/8	7/16
5124	3/4	1 1/2	1 1/8	1 1/8	15/32

3/4" Square Drive Sockets, SAE

7128	7/8	2	1 1/2	1 1/2	9/16
7132	1	2	1 5/8	1 5/8	5/8
7136	1 1/8	2 1/8	1 3/4	1 3/4	3/4
7140	1 1/4	2 1/8	2	1 3/4	13/16
7144	1 3/8	2 1/8	2 1/8	2 1/8	13/16
7148	1 1/2	2 1/4	2 1/4	2 1/8	1

1" Square Drive Sockets, SAE

8132	1	2 1/8	1 5/8	2	13/16
8140	1 1/4	2 1/8	2 1/8	2 1/8	13/16
8144	1 3/8	2 1/8	2 1/8	2 1/8	13/16
8148	1 1/2	2 1/4	2 1/4	2 1/8	15/16
8156	1 3/4	2 3/8	2 5/8	2 5/8	11/16
8164	2	2 5/8	3	2 5/8	1 3/16

1 1/2" Square Drive Sockets, SAE

9156	1 3/4	2 7/8	2 7/8	3	1 1/8
9160	1 7/8	3	3 1/8	3	1 1/4
9164	2	3 1/8	3 1/4	3 1/4	1 3/8
9172	2 1/4	3 1/4	3 3/8	3 1/4	1 1/2

3/8" Square Drive Sockets, Metric

12mm13	12	38.1	19.1	19.1	7.2
14mm13	14	38.1	22.2	22.2	11.1
16mm13	16	38.1	23.8	23.8	11.1

1/2" Square Drive Sockets, Metric

16mm15	16	38.1	25.4	25.4	11.1
18mm15	18	38.1	28.6	28.6	11.1
20mm15	20	38.1	31.7	31.7	11.9
22mm15	22	38.1	33.3	33.3	14.3

5/8" Square Drive Sockets, Metric

24mm16	24	51	38.1	38.1	15.9
--------	----	----	------	------	------

3/4" Square Drive Sockets, Metric

28mm17	28	54	44.4	44.4	19.1
30mm17	30	54	47.6	44.4	19.1
32mm17	32	54	50.8	44.4	20.6
34mm17	34	54	54.0	54.0	20.6

36mm17	36	57	57.1	54.0	23.8
--------	----	----	------	------	------

1" Square Drive Sockets, Metric

32mm18	32	54	54.0	54.0	20.6
34mm18	34	54	54.0	54.0	20.6
36mm18	36	57	57.1	54.0	23.9
38mm18	38	57	57.1	54.0	23.9
42mm18	42	60	63.5	54.0	23.9
46mm18</td					

General Accessories

Apex μ -Guard



Quality Anti-Mar Fastener Tools Begin With Quality Fastener Tools.

Apex μ -Guard™ provides a protective barrier between genuine Apex fastener tools and your finely finished workpiece. The free-spinning patent-pending design provides maximum protection for polished and highly sensitive surfaces.

Apex μ -Guard™ covering is made of a thermo plastic urethane (TPU elastomer) which cushions against costly incidental side impacts. It offers the lowest coefficient of friction for maximum tool efficiency. It is also non-removable for tamper resistance.

With Apex μ -Guard™ you get the proven Apex fastener tool fit and performance plus the best protection available against marring and in-system damage.

μ -Guard™ is your guard against the potential hazards caused by rotational friction.



If it doesn't say Apex on the outside, how can you be sure of what's on the inside?



Prevents Side Impact Damage



Free-Spinning Design



Virtually Damage Free

μ -Guard Sockets

(Includes socket and cover)



Part Number	Socket	Drive End			Socket Length	Fastener End			Assembly Features
		Size	Type	Sex		Size	Type	Sex	
UGS-AB710	10MM21	1/4	Square	F	standard	10 mm	Hex	F	FS
UGS-AB710-01	M-10MM21	1/4	Square	F	standard	10 mm	Hex	F	FS, M
UGS-AB710-02	MB-10MM21	1/4	Square	F	standard	10 mm	Hex	F	FS, M, B
UGS-BA610	10MM13	3/8	Square	F	standard	10 mm	Hex	F	FS
UGS-BA610-01	M-10MM13	3/8	Square	F	standard	10 mm	Hex	F	FS, M
UGS-BB710	10MM23	3/8	Square	F	long	10 mm	Hex	F	FS
UGS-BB710-01	M-10MM23	3/8	Square	F	long	10 mm	Hex	F	FS, M
UGS-BB710-02	MB-10MM23	3/8	Square	F	long	10 mm	Hex	F	FS, M, B
UGS-BB713	13MM23	3/8	Square	F	long	13 mm	Hex	F	FS
UGS-BB713-01	M-13MM23	3/8	Square	F	long	13 mm	Hex	F	FS, M
UGS-BB713-02	MB-13MM23	3/8	Square	F	long	13 mm	Hex	F	FS, M, B
UGS-CB713	13MM25	1/2	Square	F	long	13 mm	Hex	F	FS
UGS-CB713-03	SF-13MM25	1/2	Square	F	long	13 mm	Hex	F	FS, SF
UGS-CB715	15MM25	1/2	Square	F	long	15 mm	Hex	F	FS
UGS-CB715-03	SF-15MM25	1/2	Square	F	long	15 mm	Hex	F	FS, SF
UGS-CB718	18MM25	1/2	Square	F	long	18 mm	Hex	F	FS
UGS-CB718-03	SF-18MM25	1/2	Square	F	long	18 mm	Hex	F	FS, SF

If your tool is not shown in the table of representative products above, please contact your Apex representative.

 μ -Guard Extensions

(Includes extension and cover)



Part Number	Extension	Drive End			Extension Length	Socket End			Assembly Features*
		Size	Type	Sex		Size	Type	Sex	
UGE-A2A	EX-250-2	1/4	Hex	M	2	1/4	Square	M	FS
UGE-A4A	EX-250-4	1/4	Hex	M	4	1/4	Square	M	FS
UGE-A6A	EX-250-6	1/4	Hex	M	6	1/4	Square	M	FS
UGE-B2A	EX-370-2	1/4	Hex	M	2	3/8	Square	M	FS
UGE-B4A	EX-370-4	1/4	Hex	M	4	3/8	Square	M	FS
UGE-B6A	EX-370-6	1/4	Hex	M	6	3/8	Square	M	FS
UGE-B3C	EX-376-3	3/8	Square	F	3	3/8	Square	M	FS
UGE-B6C	EX-376-6	3/8	Square	F	6	3/8	Square	M	FS
UGE-B12C	EX-376-12	3/8	Square	F	12	3/8	Square	M	FS
UGE-C4C	EX-508-4	1/2	Square	F	4	1/2	Square	M	FS
UGE-C8C	EX-508-8	1/2	Square	F	8	1/2	Square	M	FS
UGE-C12C	EX-508-12	1/2	Square	F	12	1/2	Square	M	FS

If your tool is not shown in the table of representative products above, please contact your Apex representative.

 μ -Guard Bit Holders

(Includes bit holder and cover)



Part Number	Bit Holder	Drive End			Socket Length	Fastener End			Assembly Features
		Size	Type	Sex		Size	Type	Sex	
UGH-1NAA	M-490	1/4	Hex	M	2 31/32	1/4	Hex	F	FS, M, ET
UGH-1AAA	M-490-2	1/4	Hex	M	2	1/4	Hex	F	FS, M, ET
UGH-2NBG	838	3/8	Square	F	1 1/2	1/4	Hex	F	FS, ET
UGH-1N BG	M-838	3/8	Square	F	2 5/8	1/4	Hex	F	FS, M, ET
UGH-2NBC	835	3/8	Square	F	1 1/2	5/16	Hex	F	FS, ET
UGH-1NBC	M-835	3/8	Square	F	2 3/4	5/16	Hex	F	FS, M, ET
UGH-2NBD	855	1/2	Square	F	1 1/2	5/16	Hex	F	FS, ET
UGH-1NBD	M-855	1/2	Square	F	2 3/4	5/16	Hex	F	FS, M, ET
UGH-2NCK	QR-308	3/8	Square	F	1 3/4	1/4	Hex	F	FS, QR
UGH-2NCF	QR-508	1/2	Square	F	2 1/8	1/4	Hex	F	FS, QR
UGH-2NCJ	QR-314	3/8	Square	F	2	7/16	Hex	F	FS, QR
UGH-2NCL	QR-514	1/2	Square	F	2 1/8	7/16	Hex	F	FS, QR

If your tool is not shown in the table of representative products above, please contact your Apex representative.

***Features Abbreviations**

- FS** Free Spinning Tool is able to rotate independently of Cover
M Magnetic Tool includes magnet to hold the position of the fastener during fastening operation
B Bolt Clearance Tool is spring-loaded to allow bolt or nut to retract into the socket body
SF Surface Drive Tool has radiused corners to allow easier alignment and engagement of fastener
ET Exposed Tip Cover extends beyond end of Bit Holder to shield the majority of a standard 1 inch long Insert Bit.

Tip of Insert Bit will not be covered to allow easier fastener engagement.
QR Quick Release Tool has tension feature to allow quick & easy change between bits
 Cover will not extend beyond end of Bit Holder

Notes:
 Reported lengths are based on uncovered tool length only for reference. Cover may extend beyond end of tool by 2 mm unless otherwise noted.

Conversion Tables

Millimeter – Decimal – Fraction

mm	Dec.	in.	mm	Dec.	in.	mm	Dec.	in.	mm	Dec.	in.	mm	Dec.	in.m
0.100	.0039		5.159	.2031	13/64	10.300	.4055		15.400	.6063		20.400	.8031	
0.200	.0079		5.200	.2047		10.319	.4063	13/32	15.478	.6094	39/64	20.500	.8071	
0.300	.0118		5.300	.2087		10.400	.4094		15.500	.6102		20.600	.8110	
0.397	.0156	1/64	5.400	.2126		10.500	.4134		15.600	.6142		20.638	.8125	13/16
0.400	.0157		5.500	.2165		10.600	.4173		15.700	.6181		20.700	.8150	
0.500	.0197		5.556	.2188	7/32	10.700	.4219		15.800	.6220		20.800	.8189	
0.600	.0236		5.600	.2205		10.716	.4219	27/64	15.875	.6250	5/8	20.900	.8228	
0.700	.0276		5.700	.2244		10.800	.4252		15.900	.6250		21.000	.8268	
0.794	.0313	1/32	5.800	.2283		10.900	.4291		16.000	.6299		21.034	.8182	53/64
0.800	.0315		5.900	.2323		11.000	.4331		16.100	.6339		21.100	.8307	
0.900	.0354		5.953	.2344	15/64	11.100	.4370		16.200	.6378		21.200	.8307	
1.000	.0394		6.000	.2362		11.113	.4375	7/16	16.272	.6406	41/64	21.200	.8346	
1.100	.0433		6.100	.2402		11.200	.4409		16.300	.6417		21.300	.8386	
1.191	.0469	3/64	6.200	.2441		11.300	.4449		16.400	.6457		21.400	.8425	
1.200	.0472		6.300	.2480		11.400	.4488		16.500	.6496		21.431	.8438	27/32
1.300	.0512		6.350	.2500	1/4	11.500	.4528		16.600	.6535		21.500	.8465	
1.400	.0551		6.400	.2520		11.509	.4531	29/64	16.669	.6563	21/32	21.600	.8504	
1.500	.0591		6.500	.2559		11.600	.4567		16.700	.6575		21.700	.8543	
1.588	.0625	1/16	6.600	.2598		11.700	.4606		16.800	.6614		21.800	.8583	
1.600	.0630		6.700	.2638		11.800	.4646		16.900	.6654		21.828	.8594	55/94
1.700	.0669		6.747	.2656	17/64	11.900	.4685		17.000	.6693		21.900	.8622	
1.800	.0709		6.800	.2677		11.906	.4688	15/32	17.066	.6719	43/64	22.000	.8661	
1.900	.0748		6.900	.2717		12.000	.4724		17.100	.6732		22.100	.8701	
1.984	.0781	5/64	7.000	.2756		12.100	.4764		17.200	.6772		22.200	.8740	
2.000	.0878		7.100	.2795		12.200	.4803		17.300	.6811		22.225	.8750	7/8
2.100	.0827		7.144	.2813	9/32	12.300	.4843		17.400	.6850		22.300	.8780	
2.200	.0866		7.200	.2835		12.303	.4844	31/64	17.463	.6875	11/16	22.400	.8819	
2.300	.0906		7.300	.2874		12.400	.4882		17.500	.6890		22.500	.8858	
2.381	.0938	3/32	7.400	.2913		12.500	.4921		17.600	.6929		22.600	.8898	
2.400	.0945		7.500	.2953		12.600	.4961		17.700	.6968		22.622	.8906	57/64
2.500	.0984		7.541	.2969	19/64	12.700	.5000	1/2	17.800	.7008		22.700	.8937	
2.600	.1024		7.600	.2992		12.800	.5039		17.859	.7031	45/64	22.800	.8976	
2.700	.1063		7.700	.3031		12.900	.5079		17.900	.7047		22.900	.9016	
2.778	.1094	7/64	7.800	.3071		13.000	.5118		18.000	.7087		23.000	.9055	
2.800	.1102		7.900	.3110		13.097	.5156	33/64	18.100	.7126		23.019	.9063	29/32
2.900	.1142		7.938	.3125	5/16	13.100	.5157		18.200	.7165		23.100	.9094	
3.000	.1181		8.000	.3150		13.200	.5197		18.256	.7188	23/32	23.200	.9134	
3.100	.1220		8.100	.3189		13.300	.5236		18.300	.7205		23.300	.9173	
3.175	.1250	1/8	8.200	.3228		13.400	.5276		18.400	.7244		23.400	.9213	
3.200	.1260		8.300	.3268		13.494	.5313	17/32	18.500	.7283		23.416	.9219	59/64
3.300	.1299		8.334	.3281	21/64	13.500	.5315		18.600	.7323		23.500	.9252	
3.400	.1339		8.400	.3307		13.600	.5354		18.653	.7344	47/64	23.600	.9291	
3.500	.1378		8.500	.3346		13.700	.5394		18.700	.7362		23.700	.9331	
3.572	.1406	9/64	8.600	.3386		13.800	.5433		18.800	.7402		23.800	.9370	
3.600	.1417		8.700	.3425		13.891	.5469	35/64	18.900	.7441		23.900	.9409	
3.700	.1457		8.731	.3438	11/32	13.900	.5472		19.000	.7480		24.000	.9449	
3.800	.1496		8.800	.3465		14.000	.5512		19.050	.7500	3/4	24.100	.9488	
3.900	.1535		8.900	.3504		14.100	.5551		19.100	.7520		24.200	.9528	
3.969	.1563	5/32	9.000	.3543		14.200	.5591		19.200	.7559		24.209	.9531	61/64
4.000	.1575		9.100	.3583		14.288	.5625	9/16	19.300	.7598		24.300	.9567	
4.100	.1624		9.128	.3594	23/64	14.300	.5630		19.400	.7638		24.400	.9606	
4.200	.1654		9.200	.3622		14.400	.5669		19.447	.7656	49/64	24.500	.9646	
4.300	.1693		9.300	.3661		14.500	.5709		19.500	.7677		24.600	.9685	
4.366	.1719	11/64	9.400	.3701		14.600	.5748		19.600	.7717		24.606	.9688	31/32
4.400	.732		9.500	.3740		14.684	.5781	37/64	19.700	.7756		24.700	.9724	
4.500	.1772		9.525	.3750	3/8	14.700	.5787		19.800	.7795		24.800	.9764	
4.600	.1811		9.700	.3819		14.800	.5827		19.844	.7813	25/32	24.900	.9803	
4.700	.1850		9.800	.3858		14.900	.5866		19.900	.7835		25.000	.9843	
4.763	.1875	3/16	9.900	.3898		15.000	.5906		20.000	.7874		25.003	.9844	63/64
4.800	.1890		9.922	.3902	25/64	15.081	.5938	19/32	20.100	.7913		25.100	.9882	
4.900	.1929		10.000	.3937		15.100	.5945		20.200	.7953		25.200	.9921	
5.000	.1969		10.100	.3976		15.200	.5984		20.241	.7969	51/64	25.300	.9961	
5.100	.2008		10.200	.4016		15.300	.6024		20.300	.7992		25.400	1.000	1

Conversion Tables

Torque – Air Pressure – Miscellaneous

Cleco®

Torque Conversion Factors		
To Convert	Into	Multiply By
Inch Pounds	Foot Pounds	0.0835
Inch Pounds	Newton meters	0.1130
Inch Pounds	Kg-meters	0.0115
Inch Pounds	Kg-Cm	1.1519
Foot Pounds	Inch Pounds	12.000
Foot Pounds	Newton meters	1.3560
Foot Pounds	Kg-meters	0.1382
Foot Pounds	Kg-Cm	13.8240
Newton Meters	Inch Pounds	8.8440
Newton Meters	Foot Pounds	0.7370
Newton Meters	Kg-meters	0.1020
Newton Meters	Kg-Cm	10.2000
Kg meters	Inch Pounds	86.8100
Kg meters	Foot Pounds	7.2340
Kg meters	Newton-meters	9.8040
Kg Cm	Inch Pounds	0.8681
Kg Cm	Foot Pounds	0.0723
Kg Cm	Newton-meters	0.0980

Torque Conversion – In. Lbs. (Nm)					
In. Lbs.	Nm	In. Lbs.	Nm	In. Lbs.	Nm
5	0.6	50	5.7	140	15.8
10	1.1	60	6.8	150	17.0
15	1.7	70	7.9	160	18.1
20	2.3	80	9.0	170	19.2
25	2.8	90	10.2	180	20.3
30	3.4	100	11.3	190	21.5
35	4.0	110	12.4	200	22.6
40	4.5	120	13.6		
45	5.1	130	14.7		

Torque Conversion – Ft. Lbs. (Nm)					
Ft. Lbs.	Nm	Ft. Lbs.	Nm	Ft. Lbs.	Nm
1	1.36	33	44.8	65	88.1
2	2.7	34	46.1	66	90.0
3	4.1	35	47.5	67	90.9
4	5.4	36	48.8	68	92.2
5	6.8	37	50.2	69	93.6
6	8.1	38	52.0	70	94.9
7	9.5	39	52.9	71	96.3
8	10.9	40	54.2	72	97.6
9	12.2	41	55.6	73	99.0
10	13.6	42	57.0	74	100.3
11	14.9	43	58.3	75	102.0
12	16.3	44	60.0	76	103.1
13	17.6	45	61.0	77	104.4
14	19.0	46	62.4	78	105.8
15	20.3	47	63.7	79	107.1
16	21.7	48	65.1	80	108.5
17	23.1	49	66.4	81	110.0
18	24.4	50	67.8	82	111.2
19	25.8	51	69.2	83	112.6
20	27.1	52	70.5	84	114.0
21	28.5	53	71.9	85	115.3
22	29.8	54	73.2	86	117.0
23	31.2	55	74.6	87	118.0
24	32.5	56	75.9	88	119.3
25	33.9	57	77.3	89	121.0
26	35.3	58	78.7	90	122.0
27	36.6	59	80.0	91	123.4
28	38.0	60	81.4	92	125.0
29	39.3	61	82.7	93	126.1
30	40.7	62	84.1	94	127.5
31	42.0	63	85.4	95	129.0
32	43.4	64	86.8	96	130.2

Inch Bolt Torque Table

SAE J429 and ASME 574

Steel Grade	SAE 5		SAE 8		Socket Head Cap Screws	
	Nom Dia - Pitch	Dry	Lubed	Dry	Lubed	Dry
1/4-20	(101)	(76)	(143)	(107)	(168)	(120)
1/4-28	(116)	(87)	(147)	(123)	(192)	(144)
5/16-18	(209)	(157)	(295)	(221)	(348)	(264)
5/16-24	(231)	(174)	(327)	(245)	(384)	(288)
3/8-16	(372)	(276)	44	33	51	38
3/8-24	(420)	(312)	49	37	58	43
7/16-14	49	37	70	52	81	61
7/16-20	55	41	78	58	91	68
1/2-13	75	57	106	80	124	93
1/2-20	85	64	120	90	140	105
5/8-11	150	113	212	159	238	179
5/8-18	170	127	240	180	270	202
3/4-10	267	200	376	282	423	317
3/4-16	297	223	420	315	472	354
7/8-9	429	322	606	455	682	511
7/8-14	474	355	669	502	752	564
1-8	644	483	909	681	1022	767
1-12	722	542	1020	765	1147	860

Metric Bolt Torque Table

ISO 898

Property Class	8.8		10.9		12.9 Socket Head Cap Screw	
	Torque in Newton Meter - Nm					
Nom Size x Pitch	Dry	Lubed	Dry	Lubed	Dry	Lubed
M5 x 0.80	6.1	4.6	8.8	6.7	10.3	7.7
M6 x 1.00	10.4	7.8	15	11.2	17.6	13.1
M7 x 1.00	17.6	13.1	25.1	18.9	29.4	22
M8 x 1.25	25.4	19.1	37.6	27.3	42.6	32.1
M10 x 1.50	50	38	72	54	84	64
M12 x 1.75	88	66	126	94	146	110
M14 x 2.00	141	106	201	150	235	176
M16 x 2.00	218	164	312	233	365	274
M18 x 2.50	301	226	431	323	504	378
M20 x 2.50	426	319	609	457	712	534
M22 x 2.50	580	435	831	624	971	728
M24 x 3.00	736	552	1052	789	1231	923
M27 x 3.00	1079	809	1544	1158	1805	1353
M30 x 3.50	1463	1097	2092	1570	2446	1834
M33 x 3.50	1990	1493	2849	2137	3328	2497
M36 x 4.00	2557	1918	3659	2744	4276	3208

Lubed means cleaned dry bolts lubricated with a standard medium viscosity machine oil. Lubricate all contact areas of the bolts and washers. Lubricating the bolts is the suggested method.

Miscellaneous Conversion Factors

To Convert Into Multiply By

Inches	Millimeters	25.4000	85	586	5.9
Millimeters	Inches	0.0394	90	620	6.2
Pounds	Kilograms	0.4536	95	655	6.6
Kilograms	Pounds	2.2050	100	690	6.9
psi	bar	0.069	125	860	8.6
bar	psi	14.5			

*Preferred: Approximate to the nearest 5 kPa.

**Approximate to the nearest 0.5 Bar.

Sales & Service Centers

Note: All locations may not service all products. Please contact the nearest Sales & Service Center for the appropriate facility to handle your service requirements.

DALLAS, TEXAS

Apex Tool Group
Sales & Service Center
1470 Post & Paddock
Grand Prairie, TX 75050
Tel: (972) 641 9563
Fax: (972) 641 9674

DETROIT, MICHIGAN

Apex Tool Group
Sales & Service Center
2630 Superior Court
Auburn Hills, MI 48326
Tel: (248) 391 3700
Fax: (248) 391 7824

HOUSTON, TEXAS

Apex Tool Group
Sales & Service Center
6550 West Sam Houston
Parkway North, Suite 200
Houston, TX 77041
Tel: (713) 849 2364
Fax: (713) 849 2047

SEATTLE, WASHINGTON

Apex Tool Group
Sales & Service Center
2865 152nd Ave N.E.
Redmond, WA 98052
Tel: (425) 497 0476
Fax: (425) 497 0496

LEXINGTON, SC

Apex Tool Group
670 Industrial Drive
Lexington, SC 29072
Tel: (800) 845 5629
Tel: (803) 951 7544
Fax: (803) 358 7681

LOS ANGELES, CALIFORNIA

Apex Tool Group
Sales & Service Center
15503 Blackburn Avenue
Norwalk, CA 90650
Tel: (562) 623 4457
Fax: (562) 802 1718

YORK, PENNSYLVANIA

Apex Tool Group
Sales & Service Center
York Service Center
3990 E. Market Street
York, PA 17402
Tel: (717) 755 2933
Fax: (717) 757 5063

BRAZIL

Cooper Tools Industrial Ltda.
An Apex Tool Group, LLC company
Av. Liberdade, 4055
Zona Industrial - Iporanga
18087-170 Sorocaba
SP Brazil
Tel: +55 15 2383929
Fax: +55 15 2383260

CANADA

Apex Tool Group
Sales & Service Center
5925 McLaughlin Road
Mississauga, Ont. L5R 1B8
Canada
Tel: (905) 501 4785
Fax: (905) 501 4786

CHINA

Cooper (China) Co., Ltd.
An Apex Tool Group, LLC company
955 Sheng Li Road,
Heping Pudong, Shanghai
China 201201
Tel: +86 21 28994176
Fax: +86 21 51118446

ENGLAND

Cooper Power Tools
GmbH & Co. OHG
An Apex Tool Group, LLC company
C/O Spline Gauges
Piccadilly, Tamworth,
Staffordshire B78 2ER
United Kingdom
Tel: +44 1827 8741 28
Fax: +44 1827 8741 28

FRANCE

Cooper Power Tools SAS
An Apex Tool Group, LLC company
25 rue Maurice Chevalier
77330 Ozoir-La-Ferrière
France
Tel: +33 1 6443 2200
Fax: +33 1 6443 1717

GERMANY

Cooper Power Tools
GmbH & Co. OHG
An Apex Tool Group, LLC company
Industriestraße 1
73463 Westhausen
Germany
Tel: +49 (0) 73 63 81 0
Fax: +49 (0) 73 63 81 222

HUNGARY

Cooper Tools Hungaria Kft.
An Apex Tool Group, LLC company
Berkenyefá sor 7
Pf: 640
9027 Györ
Hungary
Tel: +36 96 66 1383
Fax: +36 96 66 1135

MEXICO

Cooper Tools
de México S.A. de C.V.
An Apex Tool Group, LLC company
Vialidad El Pueblito #103
Parque Industrial Querétaro
Querétaro, QRO 76220
Mexico
Tel: +52 (442) 211 3800
Fax: +52 (442) 103 0443

www.apextoolgroup.com

www.apextoolgroup.eu

One Of The Broadest Range Of Tools In The World Is At Your Fingertips!

Apex Tool Group covers a wide range of industrial markets, including aerospace, automotive, foundries, furniture, general industry, metal fabrication, petroleum, power generation, shipbuilding, and transportation. These markets have been served by Apex Tool Group's brands for many decades, by offering our customers solutions and products that meet their demanding productivity requirements.

To receive a product catalog quickly, just go to www.apextoolgroup.com. Select the literature you want. Then complete the "Contact Information" form, hit "Submit Request" and your order will be processed immediately. Materials normally arrive within 48 hours.

Below are a few of our more popular power tools catalogs



Apex Fastener Tools

A comprehensive line of industrial quality bits, finders, sockets and extensions.

(Catalog # TC-100)

www.apextools.com



Dotco/Cleco Material Removal Tools

A full line of pneumatic material removal tools including drills, sanders, and grinders.

(Catalog # SP-102)

www.dotco-tools.com



Master Power Industrial Air Tools

A complete line of industrial pneumatic tools for assembly and material removal applications.

(Catalog # SP-904)

www.masterpowertools.com



Apex Universal Joints

Industrial quality universal joints that can be custom designed for most any application.

(Catalog # SP-1400)

www.apexuniversal.com



DGD Assembly Systems

A complete line of spindles, D.C. electric assembly tools and controllers for the MVI.

(Catalog # SP-703DE/EN)

www.coopertools.com



Utica Torque Products

A full line of torque measuring products including torque screwdrivers, torque wrenches and analyzers.

(Catalog # SP-301)

www.uticatools.com



Cleco Pneumatic Assembly Tools

A full line of industrial pneumatic assembly tools from screwdrivers to nutrunners to impacts.

(Catalog # SP-1000)

www.clecotools.com



Cleco Power Motors

A comprehensive line of industrial pneumatic motors for a multitude of applications.

(Catalog # SP-104)

www.clecotools.com



Airetool Tube Cleaners & Expanders

A complete line of industrial tube cleaners, expanders and installation tools.

(Catalog # SP-1100)

www.airetools.com



Cleco D.C. Electric Assembly Tools

A complete line of industrial D.C. electric assembly tools and controllers.

(Catalog # SP-1020)

www.clecotools.com

Notes

Power Tools Sales & Service Centers

Please note that all locations may not service all products. Please contact the nearest Apex Tool Group Sales & Service Center for the appropriate facility to handle your service requirements.

DALLAS, TEXAS

**Apex Tool Group
Sales & Service Center**
1470 Post & Paddock
Grand Prairie, TX 75050
Tel: (972) 641 9563
Fax: (972) 641 9674

DETROIT, MICHIGAN

**Apex Tool Group
Sales & Service Center**
2630 Superior Court
Auburn Hills, MI 48326
Tel: (248) 391 3700
Fax: (248) 391 7824

HOUSTON, TEXAS

**Apex Tool Group
Sales & Service Center**
6550 West Sam Houston Parkway North, Suite 200
Houston, TX 77041
Tel: (713) 849 2364
Fax: (713) 849 2047

SEATTLE, WASHINGTON

**Apex Tool Group
Sales & Service Center**
2865 152nd Ave N.E.
Redmond, WA 98052
Tel: (425) 497 0476
Fax: (425) 497 0496

LEXINGTON, SC

Apex Tool Group
670 Industrial Drive
Lexington, SC 29072
Tel: (800) 845 5629
Tel: (803) 951 7544
Fax: (803) 358 7681

LOS ANGELES, CALIFORNIA

**Apex Tool Group
Sales & Service Center**
15503 Blackburn Avenue
Norwalk, CA 90650
Tel: (562) 623 4457
Fax: (562) 802 1718

YORK, PENNSYLVANIA

**Apex Tool Group
Sales & Service Center**
York Service Center
3990 E. Market Street
York, PA 17402
Tel: (717) 755 2933
Fax: (717) 757 5063

BRAZIL

Cooper Tools Industrial Ltda.
An Apex Tool Group, LLC company
Av. Liberdade, 4055
Zona Industrial - Iporanga
18087-170 Sorocaba
SP Brazil
Tel: +55 15 2383929
Fax: +55 15 2383260

CANADA

**Apex Tool Group
Sales & Service Center**
5925 McLaughlin Road
Mississauga, Ont. L5R 1B8
Canada
Tel: (905) 501 4785
Fax: (905) 501 4786

CHINA

Cooper (China) Co., Ltd.
An Apex Tool Group, LLC company
955 Sheng Li Road,
Heping Pudong, Shanghai
China 201201
Tel: +86 21 28994176
Fax: +86 21 51118446

ENGLAND

Cooper Power Tools
GmbH & Co. OHG
An Apex Tool Group, LLC company
C/O Spline Gauges
Piccadilly, Tamworth,
Staffordshire B78 2ER
United Kingdom
Tel: +44 1827 8741 28
Fax: +44 1827 8741 28

FRANCE

Cooper Power Tools SAS
An Apex Tool Group, LLC company
25 rue Maurice Chevalier
77330 Ozoir-La-Ferrière
France
Tel: +33 1 6443 2200
Fax: +33 1 6443 1717

GERMANY

Cooper Power Tools
GmbH & Co. OHG
An Apex Tool Group, LLC company
Industriestraße 1
73463 Westhausen
Germany
Tel: +49 (0) 73 63 81 0
Fax: +49 (0) 73 63 81 222

HUNGARY

Cooper Tools Hungaria Kft.
An Apex Tool Group, LLC company
Berkenyefa sor 7
Pf: 640
9027 Györ
Hungary
Tel: +36 96 66 1383
Fax: +36 96 66 1135

MEXICO

Cooper Tools
de México S.A. de C.V.
An Apex Tool Group, LLC company
Vialidad El Pueblito #103
Parque Industrial Querétaro
Querétaro, QRO 76220
Mexico
Tel: +52 (442) 211 3800
Fax: +52 (442) 103 0443

www.apextoolgroup.com

www.apextoolgroup.eu

Apex Tool Group, LLC
1000 Lufkin Road
Apex, NC 27539
Phone: 919-387-0099
Fax: 919-387-2614
www.clecotools.com

Cleco®