

Instrument Ball Valves



40 Series

- On-off, switching, and crossover flow paths
- Working pressures up to 3000 psig (206 bar)
- Temperatures from 50 to 150°F (10 to 65°C)
- Low-temperature service option from -65 to 150°F (-53 to 65°C)
- 1/16 to 3/4 in. and 3 to 12 mm end connections
- Virtually no dead space

Features


Directional handle indicates position of orifice.

Top-loaded design allows adjustment with the valve in-line.

Panel nut secures valve to panel or actuator.

End connections include gaugeable^① Swagelok® tube fittings and a variety of others.

① Stainless steel and alloy 400 Swagelok tube fittings are gaugeable.

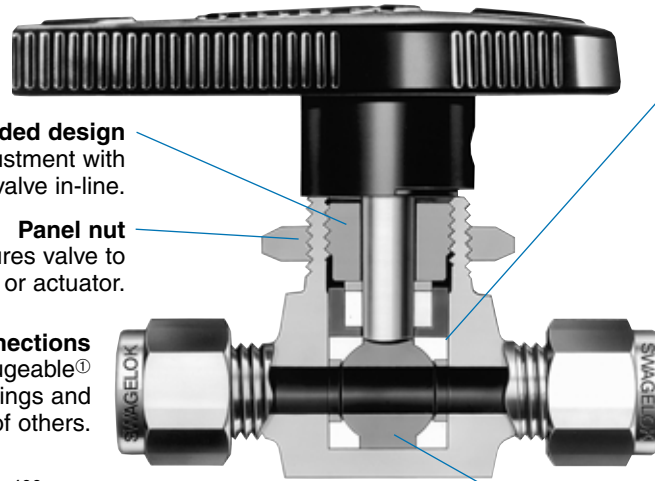


Capsule seat packing

- does not require system pressure to make a seal
- allows bidirectional flow
- has virtually no dead space
- is easily cleaned and purged
- is available in optional materials for system compatibility.

One-piece body eliminates multiple seal points.

One-piece ball stem ensures alignment of ball and orifice.

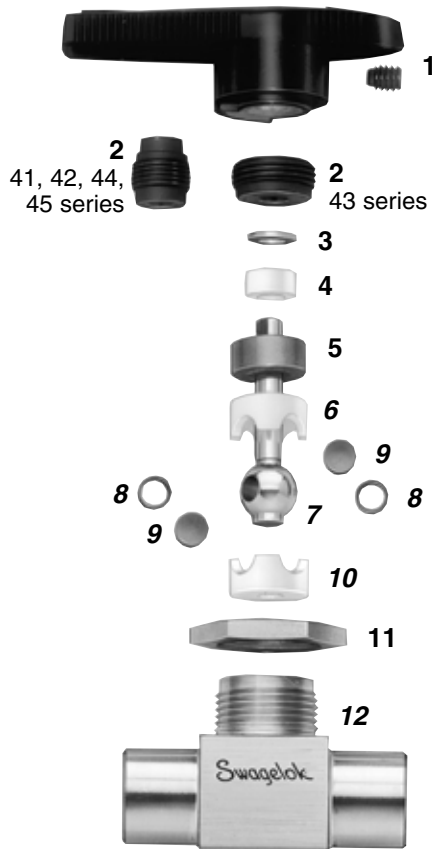

Materials of Construction

Component	Valve Body Materials		
	Stainless Steel	Brass	Alloy 400
1 Handle Set screw	Nylon with brass insert S17400 SS/A564		
2 Packing bolt ^①	316 SS powdered metal or 316 SS/A276 and A479	Brass CDA 360/B16	Alloy 405/B164
3 Upper gland	316 SS/A240	41, 42, 45 series—brass 260/B36; 43, 44 series—316 SS/A240	Alloy 400/B127
4 Bushing	PTFE/D1710		
5 Lower gland	316 SS powdered metal	Brass CDA 360/B16	Alloy 400/B164
6 Upper packing	PTFE/D1710		
7 Ball stem	316 SS/A276 and A479	Brass CDA 360/B16 ^②	Alloy 405/B164
8 Side rings	Fluorocarbon-coated 316 SS powdered metal/B783	Fluorocarbon-coated brass powdered metal ^②	Fluorocarbon-coated alloy 400 powdered metal
9 Side discs			
10 Lower packing	PTFE/D1710		
11 Panel nut	316 SS powdered metal	Brass CDA 360/B16	316 SS powdered metal
12 Body ^③	316 SS/A276 and A479	Brass CDA 360/B16	Alloy 400/B164
Lubricant^④	41, 42, 43 series—silicone-based; 44, 45 series—silicone- and fluorinated-based		

Wetted components listed in *italics*.

① Molybdenum disulfide with hydrocarbon binder coating.

② 4-way, 5-way, 6-way, and 7-way valves contain stainless steel stem, rings, and discs.

③ Bodies with VCO® end connections have fluorocarbon FKM O-rings.

④ For valves assembled without lubrication, see **Options**, page 8.

Important Information about Packed Valves



- Packing adjustment may be required during the valve's service life.
Warning: Failure to periodically inspect and maintain valve packing may result in leakage. Service instructions are shipped with each 40 series ball valve.
- Swagelok ball valves are designed to be used in a fully open or fully closed position.

- Valves that have not been cycled for a period of time may have a higher initial actuation torque.
- 43 series ball valves require an adapter to adjust the packing bolt. Ordering number: **MS-WK-43**
For all other 40 series ball valves, packing adjustments can be made with standard wrenches.

Testing

Every 40 series ball valve is adjusted for factory testing at 1000 psig (69 bar) with nitrogen or at its maximum rated pressure if less than 1000 psig (69 bar). Seat tests have a maximum allowable leak rate of 0.1 std cm³/min.

Switching (3-Way, 5-Way, and 7-Way) Valves

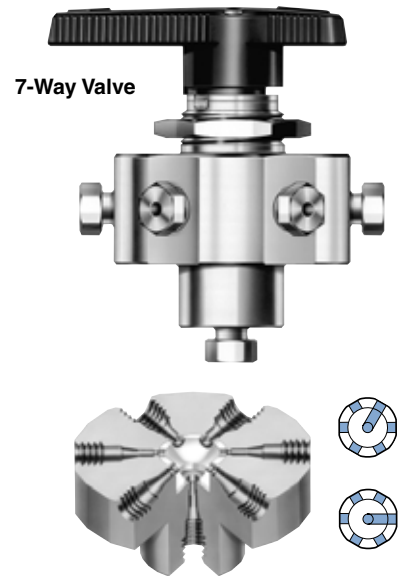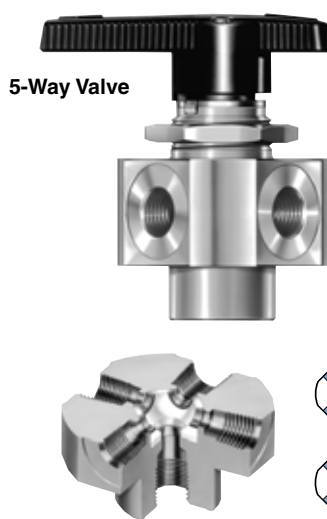

Features

- Unique, top-loaded capsule packing allows reliable switching.
- Flow can be switched from a single inlet to multiple outlets or from multiple inlets to a common outlet.
- 3-way valve has a center-off position.
- 5- and 7-way 43 series valves have a spring-loaded detent for exact port positioning.
 - Detent handle components:
 - Handle: nylon with brass insert
 - Set screw: S17400 stainless steel
 - Pins, detent plate: nickel-plated steel
 - Springs: steel/ASTM A228

Pressure-Temperature Ratings

Valve Series	Flow Pattern	Temperature Rating °F (°C)	Pressure Rating ^① psig (bar)
41X, 42X, 43X	3-way	50 to 150 (10 to 65)	2500 (172)
44X, 45X			1500 (103)
43Z	5-way		2500 (172)
45Z			1500 (103)
43Z6	7-way		500 (34.4)

① Pressure ratings for valves with Swagelok tube fitting ends may be lower. See Swagelok *Tube Fitting Data*.

Flow Data at 70°F (20°C)

C _v	Pressure Drop to Atmosphere (Δp) psi					
	10	50	100	10	50	100
	Air Flow, std ft ³ /min			Water Flow, U.S. gal/min		
2-Way Angle Pattern and 3-Way Valves						
0.08	0.9	2.4	4.3	0.3	0.6	0.8
0.15	1.7	4.5	8.0	0.4	1.0	1.5
0.30	3.4	9.0	16	0.9	2.1	3.0
0.35	4.0	10	19	1.1	2.4	3.5
0.75	8.5	22	40	2.3	5.3	7.5
0.80	9.0	24	42	2.5	5.6	8.0
0.90	10	27	48	2.8	6.3	9.0
1.5	17	45	80	4.7	11	15
1.7	19	51	90	5.3	12	17
2.0	22	60	100	6.3	14	20
3.5	39	100	180	11	25	35
3.8	43	110	200	12	27	38
4.6	52	140	240	15	33	46
5-Way Valves						
0.07	0.8	2.1	3.7	0.2	0.5	0.7
3.5	39	100	180	11	25	35
7-Way Valves						
0.05	0.6	1.5	2.6	0.1	0.3	0.5
0.07	0.8	2.1	3.7	0.2	0.5	0.7


Ordering Information and Dimensions

Add **SS** for 316 stainless steel, **B** for brass, or **M** for alloy 400 to the basic ordering number.


Example: **SS-43XS4**

Dimensions are for reference only and are subject to change.


3-Way Valve



5-Way Valve



7-Way Valve



① 1/8 in. (3.2 mm) minimum panel thickness.

End Connections		Basic Ordering Number	C _v	Orifice		Dimensions, in. (mm)									
Inlet/Outlet	Size			in.	mm	A	B	C	D	F	G	H	J	W	
3-Way Valves															
Fractional Swagelok tube fittings	1/16	-41XS1	0.08	0.052	1.3	1.68 (42.7)	0.84 (21.3)	0.81 (20.6)	0.34 (8.6)	1.13 (28.7)	1/4 (6.4)	19/32 (15.0)	1.36 (34.5)	0.58 (14.7)	
	1/8	-41XS2	0.15	0.093	2.4	2.01 (51.1)	1.01 (25.7)	0.97 (24.6)							
	1/4	-42XS4	0.35	0.125	3.2	2.21 (56.1)	1.10 (27.9)	1.07 (27.2)							
		-43XS4	0.90	0.187	4.8	2.39 (60.7)	1.20 (30.5)	1.17 (29.7)	0.44 (11.2)	1.53 (38.9)	3/16 (4.8)	25/32 (19.8)	1.56 (39.6)	0.78 (19.8)	
	3/8	-44XS6	2.0	0.281	7.1	2.89 (73.4)	1.45 (36.8)	1.43 (36.3)	0.56 (14.2)	2.00 (50.8)	3/8 (9.7)	1 1/8 (28.7)	2.07 (52.6)	1.12 (28.4)	
	1/2	-45XS8	4.6	0.406	10.3	3.48 (88.4)	1.74 (44.2)		0.69 (17.5)	3.00 (76.2)		1 1/2 (38.1)	2.43 (61.7)	1.50 (38.1)	
3/4	-45XS12	3.8													
Metric Swagelok tube fittings	3 mm	-41XS3MM	0.15	0.093	2.4	2.01 (51.1)	1.01 (25.7)	0.97 (24.6)	0.34 (8.6)	1.13 (28.7)	1/4 (6.4)	19/32 (15.0)	1.36 (34.5)	0.58 (14.7)	
	6 mm	-42XS6MM	0.35	0.125	3.2	2.21 (56.1)	1.10 (27.9)	1.07 (27.2)							
		-43XS6MM	0.90	0.187	4.8	2.39 (60.7)	1.20 (30.5)	1.17 (29.7)							0.44 (11.2)
	8 mm	-43XS8MM	0.80			2.46 (62.5)	1.23 (31.2)	1.20 (30.5)	0.56 (14.2)	2.00 (50.8)	3/8 (9.7)	1 1/8 (28.7)	2.07 (52.6)	1.12 (28.4)	
	10 mm	-44XS10MM	2.0	0.281	7.1	2.89 (73.4)	1.45 (36.8)	1.43 (36.3)				0.69 (17.5)	3.00 (76.2)	1 1/2 (38.1)	2.43 (61.7)
12 mm	-45XS12MM	4.6	0.406	10.3	3.48 (88.4)	1.74 (44.2)		0.69 (17.5)	3.00 (76.2)						
Female NPT	1/8	-42XF2	0.30	0.125	3.2	1.63 (41.4)	0.81 (20.6)		0.34 (8.6)	1.13 (28.7)	1/4 (6.4)	19/32 (15.0)	1.36 (34.5)	0.58 (14.7)	
	1/4	-43XF4	0.75	0.187	4.8	2.06 (52.3)	1.03 (26.2)		0.44 (11.2)	1.53 (38.9)	3/16 (4.8)	25/32 (19.8)	1.56 (39.6)	0.78 (19.8)	
		-44XF4	1.7	0.281	7.1	2.50 (63.5)	1.25 (31.8)		0.56 (14.2)	2.00 (50.8)	3/8 (9.7)	1 1/8 (28.7)	2.07 (52.6)	1.12 (28.4)	
	3/8	-44XF6	1.5			3.13 (79.5)	1.56 (39.6)		0.69 (17.5)	3.00 (76.2)		1 1/2 (38.1)	2.43 (61.7)	1.50 (38.1)	
	1/2	-45XF8	3.5	0.406	10.3	3.13 (79.5)	1.56 (39.6)		0.69 (17.5)	3.00 (76.2)					
Male NPT/ Swagelok tube fittings	1/4	-43XS4-S4-M4	0.80	0.187	4.8	2.40 (61.0)	1.20 (30.5)	1.03 (26.2)	0.44 (11.2)	1.53 (38.9)	3/16 (4.8)	25/32 (19.8)	1.56 (39.6)	0.78 (19.8)	
Female ISO tapered	1/4	-43XF4RT	0.75	0.187	4.8	2.06 (52.3)	1.03 (26.2)		0.44 (11.2)	1.53 (38.9)	3/16 (4.8)	25/32 (19.8)	1.56 (39.6)	0.78 (19.8)	
	3/8	-44XF6RT	1.5	0.281	7.1	2.50 (63.5)	1.25 (31.8)		0.56 (14.2)	2.00 (50.8)	3/8 (9.7)	1 1/8 (28.7)	2.07 (52.6)	1.12 (28.4)	
	1/2	-45XF8RT	3.5	0.406	10.3	3.13 (79.5)	1.56 (39.6)		0.69 (17.5)	3.00 (76.2)		1 1/2 (38.1)	2.43 (61.7)	1.50 (38.1)	
Male VCR fittings	1/4	-42XVCR4	0.35	0.125	3.2	2.13 (54.1)	1.06 (26.9)	1.09 (27.7)	0.44 (11.2)	1.13 (28.7)	3/16 (4.8)	19/32 (15.0)	1.36 (34.5)	0.78 (19.8)	
		-43XVCR4	0.90	0.187	4.8		1.53 (38.9)	25/32 (19.8)	1.56 (39.6)						
5-Way Valves															
Female Swagelok tube fittings	1/8	-43ZFS2 ^①	0.07	0.062	1.6	1.94 (49.3)	0.97 (24.6)		0.44 (11.2)	1.53 (38.9)	5/32 (4.1)	29/32 (23.1)	1.69 (42.9)	—	
Female NPT	1/8	-43ZF2 ^①	0.07	0.062	1.6	1.55 (39.4)	0.78 (19.8)	0.88 (22.4)	0.44 (11.2)	1.53 (38.9)	5/32 (4.1)	29/32 (23.1)	1.69 (42.9)	—	
	1/2	-45ZF8-ND ^②	3.5	0.406	10.3	3.13 (79.5)	1.56 (39.6)		0.69 (17.5)	3.00 (76.2)	3/8 (9.7)	1 1/2 (38.1)	2.43 (61.7)	—	
7-Way Valves															
Female Swagelok tube fittings	1/16	-43Z6FS1	0.05	0.052	1.3	1.94 (49.3)	0.97 (24.6)		0.44 (11.2)	1.53 (38.9)	5/32 (4.1)	29/32 (23.1)	1.69 (42.9)	—	
	1/8	-43Z6FS2	0.07	0.062	1.6										


Dimensions shown with Swagelok tube fitting nuts finger-tight.

① Cross-port flow may occur during switching. If cross-port flow is unacceptable, specify a 0.049 in. ball orifice. Example: SS-43ZF2-049


② Cross-port flow may occur during switching. If cross-port flow is unacceptable, specify a 0.093 in. ball orifice. Example: SS-45ZF8-ND-093

Crossover (4-Way and 6-Way) Valves

4-Way Valve

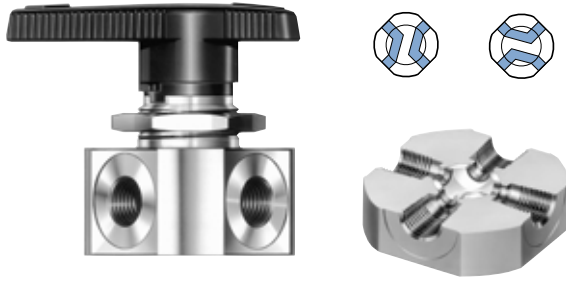

6-Way Valve

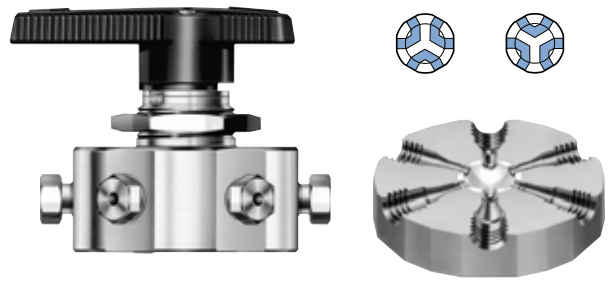

Features

- Capsule packing allows crossover of two or three streams.
- Machined stops provide positive port positioning.
 - Stop plate material: aluminum/ASTM B209 or B211.

Pressure-Temperature Ratings

Valve Series	Flow Pattern	Temperature Rating °F (°C)	Working Pressure psig (bar)
43Y	4-way	50 to 150 (10 to 65)	2500 (172)
45Y			1500 (103)
43Y6	6-way		500 (34.4)

Flow Data at 70°F (20°C)

C _v	Pressure Drop to Atmosphere (Δp), psi					
	10	50	100	10	50	100
	Air Flow, std ft ³ /min			Water Flow, U.S. gal/min		
4-Way Valves						
0.06	0.7	1.8	3.2	0.2	0.4	0.6
0.08	0.9	2.4	4.2		0.5	0.8
1.6	18	48	85	5.0	11	16
6-Way Valves						
0.06	0.7	1.8	3.2	0.2	0.4	0.6
0.08	0.9	2.4	4.2		0.5	0.8


Ordering Information and Dimensions

Dimensions are for reference only and are subject to change.


Add **SS** for 316 stainless steel, **B** for brass, or **M** for alloy 400 to the basic ordering number.

Example: **SS-43YF2**

4-Way Valve



6-Way Valve



① 1/8 in. (3.2 mm) minimum panel thickness.


End Connection	Type	Size	Basic Ordering Number	C _v	Orifice		Dimensions, in. (mm)							
					in.	mm	A	B	D	E	F	G	H	J
4-Way Valves														
Female Swagelok tube fitting	1/16	-43YFS1 ①	0.06	0.052	1.3	1.55 (39.4)	0.78 (19.8)	0.44 (11.2)	0.44 (11.2)	1.53 (38.9)	3/16 (4.8)	29/32 (23.1)	1.68 (42.7)	
	1/8	-43YFS2 ①	0.08	0.062	1.6	1.95 (49.5)	0.98 (24.9)							
Female NPT	1/8	-43YF2 ①				1.6	0.281	7.1	1.55 (39.4)	0.78 (19.8)	0.44 (11.2)	0.44 (11.2)	1.53 (38.9)	3/16 (4.8)
	1/2	-45YF8 ②	3.13 (79.5)	1.56 (39.6)	0.69 (17.5)				0.69 (17.5)	3.00 (76.2)				
6-Way Valves														
Female Swagelok tube fitting	1/16	-43Y6FS1	0.06	0.052	1.3	1.95 (49.5)	0.97 (24.6)	0.44 (11.2)	0.44 (11.2)	1.53 (38.9)	3/16 (4.8)	29/32 (23.1)	1.68 (42.7)	
	1/8	-43Y6FS2	0.08	0.062	1.6									

① Cross-port flow may occur during switching. If cross-port flow is unacceptable, specify a 0.049 in. ball orifice. Example: **SS-43YFS2-049**

② Cross-port flow may occur during switching. If cross-port flow is unacceptable, specify a 0.093 in. ball orifice. Example: **SS-45YF8-093**

Pneumatic Actuators

Rack and pinion actuators are compact, lightweight, easy to mount and can operate with standard shop air. For technical data, including actuator types, materials of construction, and pressure-temperature ratings, see the Swagelok *Rack and Pinion Pneumatic Actuators* catalog.

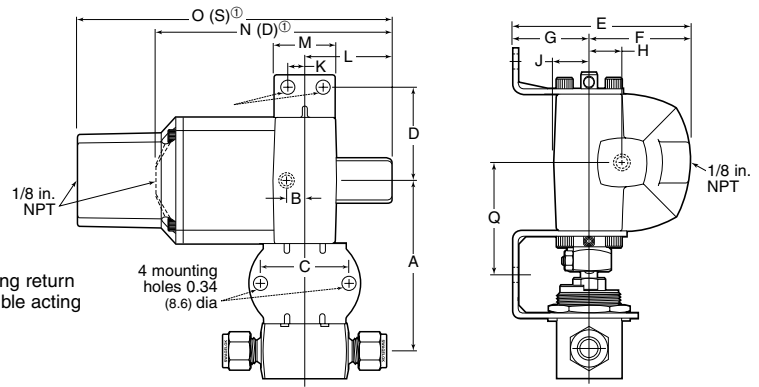

Dimensions

Valve Series	Actuator Model	Dimensions, in. (mm)														
		A	B	C	D	E	F	G	H	J	K	L	M	N	O	Q
41, 41-A, 41X, 42, 42-A, 42X	-131	2.81 (71.4)	0.34 (8.6)	2.00 (50.8)	1.75 (44.5)	3.04 (77.2)	1.73 (43.9)	1.31 (33.3)	0.60 (15.2)	0.52 (13.2)	0.31 (7.9)	1.46 (37.1)	1.25 (31.8)	4.09 (104)	4.91 (125)	1.80 (45.7)
	-151	2.91 (73.9)			2.31 (58.7)	4.07 (103)	2.32 (58.9)	1.75 (44.5)	0.75 (19.1)	0.81 (20.6)	0.44 (11.2)	2.16 (54.9)	1.56 (39.6)	5.89 (150)	7.86 (200)	2.30 (58.4)
43, 43-A, 43X, 43Y	-133 -153	3.72 (94.5)	0.48 (12.2)	2.00 (50.8)	2.31 (58.7)	4.07 (103)	2.32 (58.9)	1.75 (44.5)	0.75 (19.1)	0.81 (20.6)	0.44 (11.2)	2.16 (54.9)	1.56 (39.6)	5.89 (150)	7.86 (200)	2.56 (65.0)
		4.13 (104)		2.19 (55.6)	4.25 (108)	2.32 (58.9)	1.75 (44.5)	0.75 (19.1)	0.81 (20.6)	0.44 (11.2)	2.16 (54.9)	1.56 (39.6)	5.89 (150)	7.86 (200)	2.56 (65.0)	
44, 44-A, 44X	-133 -153	4.13 (104)	0.48 (12.2)	2.00 (50.8)	2.31 (58.7)	4.07 (103)	2.32 (58.9)	1.75 (44.5)	0.75 (19.1)	0.81 (20.6)	0.44 (11.2)	2.16 (54.9)	1.56 (39.6)	5.89 (150)	7.86 (200)	2.56 (65.0)
45, 45-A, 45X, 45Y	-133 -153	4.25 (108)	0.48 (12.2)	2.19 (55.6)	2.31 (58.7)	4.07 (103)	2.32 (58.9)	1.75 (44.5)	0.75 (19.1)	0.81 (20.6)	0.44 (11.2)	2.16 (54.9)	1.56 (39.6)	5.89 (150)	7.86 (200)	2.56 (65.0)

Actuator Pressure at Maximum System Pressure

Required pressures based on valve performance using pressurized air or nitrogen.

Actuator Model	Actuator Designator	Valve Series	Actuation Modes			
			Double Acting		Spring Return	
			Single	Dual	Single	Dual
			Minimum Actuator Pressure, psig (bar)			
-131 (90°)	-31	41, 41-A, 42, 42-A	20 (1.4)	35 (2.5)	60 (4.2)	70 (4.9)
		43, 43-A, 43Y	50 (3.5)	80 (5.6)	80 (5.6)	—
-151 (180°)	-51	41X, 42X	20 (1.4)	35 (2.5)	60 (4.2)	70 (4.9)
		43X	50 (3.5)	80 (5.6)	70 (4.9)	—
-133 (90°)	-33	43, 43-A, 43Y	20 (1.4)	35 (2.5)	65 (4.5)	75 (5.2)
		44, 44-A	25 (1.8)	50 (3.5)	70 (4.9)	90 (6.3)
		45, 45-A, 45Y	60 (4.2)	100 (6.9)	90 (6.3)	—
-153 (180°)	-53	43X	20 (1.4)	35 (2.5)	65 (4.5)	70 (4.9)
		44X	25 (1.8)	50 (3.5)	70 (4.9)	80 (5.6)
		45X	60 (4.2)	100 (6.9)	85 (5.9)	—

Other Actuator Options

For Field Assembly or Factory Assembly

Electric Actuators

For information on electric actuators, see the *Electric Actuators* catalog.

Solenoid Valves

attach to the actuator to create an electropneumatically actuated ball valve assembly.

Limit Switches

indicate actuator position by means of an electrical signal. They meet a variety of NEMA ratings such as NEMA 4 (weatherproof) and NEMA 7 (explosion proof). For more information, see the *Limit Switches* catalog.

Position Indicators

provide visual status of a valve.

ISO 5211-Compliant Actuator Mounting Bracket Kits

For information, see the *Actuated Ball Valve Selection Guide*.

Ordering Information

Factory-Assembled Actuators

Typical Ordering Number

SS - 43S4 - 31D

Valve Ordering Number

Actuator Designator
Determine valve series, then select actuator model (see **Actuator Pressure** table).

Actuation Mode

- D = double acting
- C = spring return, normally closed
- O = spring return, normally open
- S = spring return, 3- and 4-way valves

For dual-mounted assemblies (two valves mounted to one actuator), add **DM** to the ordering number.

Example: SS-43S4-31DDM

Actuators for Field Assembly

Typical Ordering Number

MS - 131 - DA

Actuator Model

Determine valve series, then select actuator model (see **Actuator Pressure** table).

Actuation Mode

- DA = double acting
- SR = spring return

Mounting Bracket Kits

Valve Series	Actuator Model	Ordering Number
41, 41-A, 42, 42-A	-131	MS-MB-41 ^①
41X, 42X	-151	
43, 43-A	-131	MS-MB-43
43X	-151	
43, 43-A	-133	MS-MB-43-133
43X	-153	
43Y	-131	MS-MB-43Y
	-133	MS-MB-43Y-133
44, 44-A	-133	MS-MB-44 ^②
44X	-153	
45, 45-A	-133	MS-MB-45
45X	-153	
45Y	-133	MS-MB-45Y

^① 42 series valves with VCO or VCR end connections mounted to an actuator are only available factory assembled.

^② 44 series valves with VCR end connections require kit **MS-MB-44-VCR**.

Options

Handles

Factory-Assembled Nylon

Black is standard. For other colors, add a handle color designator to the valve ordering number.

Example: SS-43S4-**BL**

Handle Color	Designator
Black	-BK
Blue	-BL
Green	-GR
Orange	-OG
Red	-RD
Yellow	-YW



316 Stainless Steel Bar

Add **-SH** to the valve ordering number.

Example: SS-43S4-**SH**



Aluminum Bar

Add **-BKB** to the valve ordering number.

Example: SS-43S4-**BKB**



Nylon Oval (2- and 3-Way)

Add **-K** to the valve ordering number.

Example: SS-43S4-**K**

Nylon oval handles are available factory assembled only.

Handle Kits

include handle and set screw.

Valve Series	Nylon Directional Handle Basic Ordering Number ^①	Stainless Steel Bar Handle Ordering Number	Aluminum Bar Handle Ordering Number
41, 41-A, 41X, 42, 42-A, 42X	BZ-5K-42	SS-5K-42B	A-5S-42B-BK
43, 43-A, 43X, 43Y	BZ-5K-43	SS-5K-43B	A-5S-43B-BK
43Z	BZ-5K-43Z	—	A-5S-43ZB-BK
44, 44-A, 44X	BZ-5K-44	SS-5K-44B	A-5S-44B-BK
45, 45-A, 45X, 45Y	BZ-5K-45	SS-5K-45B	A-5S-45B-BK

^① For a complete ordering number, add a handle color designator to the basic ordering number. Example: BZ-5K-42-**BK**

Safe Product Selection

When selecting a product, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user.

Caution: Do not mix or interchange parts with those of other manufacturers.

Vented Valves

2-Way, Straight-Pattern Valves

When the valve is closed, the downstream port vents to atmosphere through a vent hole in the side of the valve body.

2-Way, Angle-Pattern and 3-Way Valves

When the valve is closed, the bottom port vents to atmosphere through a vent hole in the side of the valve body.

To order, insert **V** into the valve ordering number.

Example: SS-43VS4

Pressure rating for vented valves is 500 psig (34.4 bar).

Valves Assembled Without Lubrication

40 series ball valves assembled without lubricant are cleaned and packaged in accordance with *Special Cleaning and Packaging (SC-11)* and are adjusted for factory testing at 200 psig (13.7 bar). Valves have a pressure rating of 200 psig (13.7 bar). Brass valves are assembled with stainless steel rings, discs, and stem. To order, add **-1466** to the valve ordering number.

Example: SS-43S4-**1466**

Low-Temperature Service

Live-loaded packing option extends the temperature range to -65 to 150°F (-53 to 65°C).

For more information, see the *Live-Loaded 40 Series Ball Valves for Low-Temperature Service* catalog.

Oxygen Service

For more information about hazards and risks of oxygen-enriched systems, see the *Oxygen System Safety* technical report.

Sour Gas Service

40 series ball valves with female pipe ends are available for sour gas service. Materials for wetted valve components are selected in accordance with NACE Standard MR0175 for sulfide stress cracking resistant materials. Stem, rings, and discs are alloy 400. To order, add **-SG** to the valve ordering number.

Example: SS-43F4-**SG**

Directional Name Plates

Directional name plates indicate the direction of flow.

A matte surface accepts ink or labels. To order, add **-WN1** (blank nameplate) or **-WN2** (marked nameplate) to the valve ordering number.

Example: SS-43S4-**WN1**

Optional Flow Paths

40 series ball valves are available with a variety of flow paths to accommodate many special applications.

For more information, see the *40 Series Ball Valve Flow Path Options* selection guide.