



# Flatdecks



- CLASSIC FLATDECK W/ SINGLES (FS)
- CLASSIC FLATDECK W/ DUALS (FD)
- FLATDECK WITH HYDRAULIC DOVE (FY)
- LOW-PRO FLATDECK W/ DUALS (LD)
- LOW-PRO W/ HYDRAULIC DOVE (LY)
- 8" I-BEAM DECKOVER (F8)





# Classic Flatdeck with Singles (FS)



Also Available with a Bumper Pull or Pintle Coupler.



**Lengths**  
20' - 40'

## Standard Features

- 15,680 lb. G.V.W.R.
- 7,000 lb. x 2 G.A.W.R.
- 2 5/16" Gooseneck Ball Coupler (25,000 lb.)
- Safety Chains
- 2 - Drop Leg Jacks (10,000 lb.)
- 2 - Posi-lube Brake Axles (7,000 lb.)
- 6 Leaf Slipper Spring Suspension
- 4 - 16" White Spoke Wheels
- 4 - 235/80R16 Radial Tires (3,520 lb.)
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Side Steps on Both Sides
- Front Toolbox (GN Only)
- 8' Ramps w/ Holders
- 12" x 14 lb. I-Beam Main Frame, Riser & Neck
- Frame Bridge Standard on 30' and up.
- 3" Channel Crossmembers 16" on Center
- 2 x 6 x 1/8" Square Tubing Outer Deck Frame
- 2" Treated Pine Lumber Deck
- 102" Wide Deck
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- Sealed Wire Harness
- Sand Blasted, Acid Washed, Powder Coated

### Notes:

- 30' and up, upgrade to triple axle recommended
- 30' and up, upgrade to 19 lb. I-Beam recommended

**POWDER COATED**

At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.

## Coupler Options

- GN 2 5/16" Round (25,000 lb.) w/ Toolbox \*
- Rigid mount 2-5/16 (25,000 lb.)
- GN 2 5/16" Round (30,000 lb.) w/ Toolbox
- GN Load-Leveling 2 5/16" Square (30,000 lb.) & Tbx
- 3" Pintle Eye - Face-mount (36,000 lb.)
- GN 2 5/16" Square (30,000 lb.) w/ Toolbox
- GN 2 5/16" Square (25,000 lb.) w/ Toolbox

## Axle Options

- (2) 7,000# Electric / Spring \*
  - (2) 7,000# Electric / Torsion
  - (2) 7,000# Elec/Hyd Disk / Spring
  - (2) 7,000# Elec/Hyd Disk / Torsion
  - (3) 7,000# Electric / Spring
  - (3) 7,000# Electric / Torsion
  - (2) 7,000# Load Range G 14ply Tires Electric / Spring
  - (2) 7,000# Load Range G 14ply Tires Electric / Torsion
  - (2) 7,000# Load Range G 14ply Tires Elec/Hyd Disk / Spring
  - (2) 7,000# Load Range G 14ply Tires Elec/Hyd Disk / Torsion
  - (3) 7,000# Load Range G 14ply Tires Electric / Spring
  - (3) 7,000# Load Range G 14ply Tires Electric / Torsion
- Consult Your Sales Rep. for Additional Available Axles

## Tail Options

- Straight Deck w/ 8' Slide-in Ramps \*
- 5' Dovetail w/ 5' Slide-in Ramps
- 5' Dovetail w/ 2 Flip-over Ramps
- 5' Split Pop-up Dove w/ 5' Slide-in Ramps
- 5' Center Pop-up Dove w/ 2 Flip-over Ramps
- 5' Dovetail w/ 3 Flip-over Ramps

## Color Options

- Black Powdercoat \*
- Equipment Yellow Powdercoat
- Grey Powdercoat
- Red Powdercoat
- White Powdercoat


## Other Options

- Cold Weather Wiring Harness (7-Way RV)
- Plate for Winch
- Spare Tire Mount
- 6" Taller GN Riser
- Douglas Fir Lumber
- 1/4" Diamond Plate Steel Floor <sup>2</sup>
- Under Frame Tie Down Flat
- 19 lb. I-Beam Main Frame, Riser & Neck
- 22 lb. I-Beam Main Frame, Riser & Neck <sup>2</sup>
- 12" oc Crossmembers
- 1 Pair D-Rings
- Rough Oak Floor
- Weld-On Strap Ratchets (2)
- Hydraulic Jacks (12,000 lb.) <sup>2</sup>
- Receiver Hitch
- Goodyear G Rated Tires
- 4" Ratchets every 4ft w/ Slide Track
- Steel Floor & 4 D-Rings
- Front Toolbox (PH Only)
- Frame Bridging
- Diamond Plate Ramp Bottoms
- Torque Tube
- Deck on the Neck 8x8 ft
- Side-mount Toolbox
- Winch 12VDC (12,000 lb.)
- 2-speed Jacks (12,000 lb.)
- HD Semi Trailer 2x Jacks (25,000 lb.) No Frt T/box
- Ramp Support Arms

\* Standard Feature

<sup>2</sup> Special Order Option: Requires additional lead-time

## Drawings and Specifications

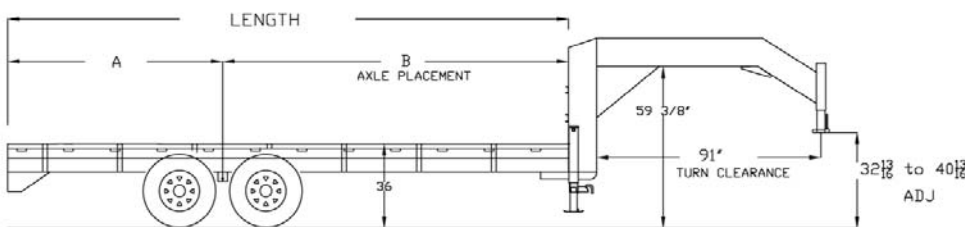

Classic Flatdeck with Singles		
Length	A	B
20'	92"	148"
22'	102"	162"
24'	112"	176"
25'	115"	185"
26'	114"	198"
28'	123"	213"
29'	127"	221"

Classic Flatdeck with Singles		
Length	A	B
30'	124"	236"
32'	131"	253"
34'	140"	268"
35'	136"	284"
36'	140"	292"
38'	148"	308"
40'	144"	336"



AIR RIDE SUSPENSION AVAILABLE



# Classic Flatdeck with Duals (FD)



Also Available with a Bumper Pull or Pintle Coupler.



**Lengths**  
20' - 40'

## Standard Features

- 22,400 lb. G.V.W.R.
- 10,000 lb. x 2 G.A.W.R.
- 2 5/16" Gooseneck Ball Coupler (25,000 lb.)
- Safety Chains
- 2 - Drop Leg Jacks (10,000 lb.)
- 2 - Oil Bath Brake Axles (10,000 lb.)
- 6 Leaf Slipper Spring Suspension
- 8 - 16" Grey Dual Wheels w/ 8 on 6.5" BP
- 8 - 16" 235/80R16 Radial Tires (3,090 lb.)
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Side Steps on Both Sides
- Front Toolbox (GN Only)
- 8' Ramps w/ Holders
- 12" x 14 lb. I-Beam Main Frame, Riser & Neck
- Frame Bridge Standard on 30' and up.
- 3" Channel Crossmembers 16" on Center
- 2 x 6 x 1/8" Square Tubing Outer Deck Frame
- 2" Treated Pine Lumber Deck
- 102" Wide Deck
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- Sealed Wire Harness
- Sand Blasted, Acid Washed, Powder Coated

## Notes:

- 25' and up includes 19 lb. I-Beam Frame, Riser & Neck
- Pintlehooks must upgrade to 19 lb. I-Beam



At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.

## Coupler Options

- GN 2 5/16" Round (25,000 lb.) w/ Toolbox \*
- BP 2 5/16" Adjustable (25,000 lb.)
- GN 2 5/16" Round (30,000 lb.) w/ Toolbox
- GN Load-Leveling 2 5/16" Square (30,000 lb.) & Tbx
- 3" Pintle Eye - Face-mount (36,000 lb.)
- GN 2 5/16" Square (30,000 lb.) w/ Toolbox
- GN 2 5/16" Square (25,000 lb.) w/ Toolbox

## Axle Options

- (2) 10,000# Air / Spring
  - (2) 10,000# Elec / Spring \*
  - (2) 10,000# Elec / Torsion
  - (2) 10,000# Elec/Hyd Disk / Spring
  - (3) 10,000# Air / Spring
  - (3) 10,000# Elec / Spring
  - (3) 10,000# Elec / Torsion
  - (2) 12,000# Air / Spring
  - (2) 12,000# Elec / Spring
  - (2) 12,000# Elec/Hyd Disk / Spring
  - (3) 12,000# Elec / Spring
  - (3) 12,000# Elec/Hyd Disk / Spring
  - (2) 12,000#, 14ply Air / Spring
  - (2) 12,000#, 14ply Elec / Spring
  - (2) 12,000#, 14ply Elec/Hyd Disk / Spring
  - (3) 12,000#, 14ply Elec / Spring
  - (3) 12,000#, 14ply Elec/Hyd Disk / Spring
  - (2) 16,000# 17.5" wheel, Air / Spring
  - (2) 16,000# 17.5" wheel, Elec / Spring
- Consult Your Sales Rep. for Additional Available Axles


## Tail Options

- Straight Deck w/ 8' Slide-in Ramps \*
- 5' Dovetail w/ 5' Slide-in Ramps
- 5' Dovetail w/ 2 Flip-over Ramps
- 5' Split Pop-up Dove w/ 5' Slide-in Ramps
- 5' Center Pop-up Dove w/ 2 Flip-over Ramps
- 5' Dovetail w/ 3 Flip-over Ramps

## Other Options

- Cold Weather Wiring Harness (7-Way RV)
- Hutch suspension H9700-Underslung Tandem Axle <sup>2</sup>
- AL-KO Axles <sup>2</sup>
- Hutch suspension H9700-Underslung Triple Axle <sup>2</sup>
- Plate for Winch
- Spare Tire Mount
- 6" Taller GN Riser
- Douglas Fir Lumber
- 1/4" Diamond Plate Steel Floor <sup>2</sup>
- Under Frame Tie Down Flat
- 19 lb. I-Beam Main Frame, Riser & Neck
- 22 lb. I-Beam Main Frame, Riser & Neck <sup>2</sup>
- 12" oc Crossmembers
- 1 Pair D-Rings
- Rough Oak Floor
- Weld-On Strap Ratchets (2)
- Hydraulic Jacks (12,000 lb.) Incl. Front Toolbox <sup>2</sup>
- Receiver Hitch
- Goodyear G Rated Tires
- 4" Ratchets every 4ft w/ Slide Track
- 6" Axle Spread (Longer Equalizer)
- 72" Axle Spread
- Steel Floor & 4 D-Rings ( Cut Fenders )
- Front Toolbox (PH Only)
- Frame Bridging
- Diamond Plate Ramp Bottoms
- Torque Tube
- Deck on the Neck 8x8 ft
- Side-mount Toolbox
- Winch 12VDC (12,000 lb.) Incl. Front Toolbox
- 2-speed Jacks (12,000 lb.)
- HD Semi Trailer 2x Jacks (25,000 lb.) No Frt T/box
- Ramp Support Arms

## Drawings and Specifications

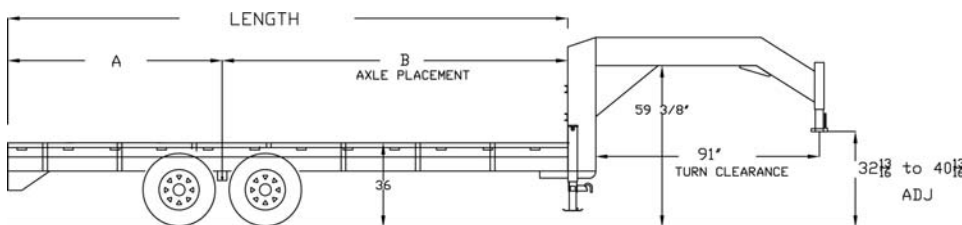

Classic Flatdeck with Duals		
Length	A	B
20'	92"	148"
22'	102"	162"
24'	112"	176"
25'	115"	185"
26'	114"	198"
28'	123"	213"
30'	124"	236"
32'	131"	253"

Classic Flatdeck with Duals		
Length	A	B
34'	140"	268"
35'	136"	284"
36'	140"	292"
38'	148"	308"
40'	144"	336"



AIR RIDE SUSPENSION AVAILABLE

\* Standard Feature

<sup>2</sup> Special Order Option: Requires additional lead-time



# Flatdeck with Hydraulic Dove (FY)



Also Available with a Bumper Pull or Pintle Coupler.



**Lengths**  
30' - 40'

## Standard Features

- 22,400 lb. G.V.W.R.
- 10,000 lb. x 2 G.A.W.R.
- 2 5/16" Gooseneck Ball Coupler (25,000 lb.)
- Safety Chains
- 2 - Drop Leg Jacks (10,000 lb.)
- 2 - Oil Bath Brake Axles (10,000 lb.)
- 6 Leaf Slipper Spring Suspension
- 8 - 16" Grey Dual Wheels w/ 8 on 6.5" Bolt Pattern
- 8 - 16" 235/80R16 Radial Tires (3,090 lb.)
- Interstate Deep Cycle Battery
- Self Contained Hydraulic Unit
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Side Steps on Both Sides
- Front Toolbox (GN Only)
- 10' Hydraulic Dovetail
- 12" x 19 lb. I-Beam Main Frame, Riser & Neck
- Frame Bridging
- 3" Channel Crossmembers 16" on Center
- 2 x 6 x 1/8" Square Tubing Outer Deck Frame
- 2" Treated Pine Lumber Deck
- 102" Wide Deck
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- Sealed Wire Harness
- Sand Blasted, Acid Washed, Powder Coated

**POWDER COATED**

At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.

## Coupler Options

- GN 2 5/16" Round (25,000 lb.) w/ Toolbox \*
- Ball Coupler 2 5/16" Adjustable (25,000 lb.)
- GN 2 5/16" Round (30,000 lb.) w/ Toolbox
- GN Load-Leveling 2 5/16" Square (30,000 lb.) & Tbx
- 3" Pintle Eye - Face-mount (36,000 lb.)
- GN 2 5/16" Square (30,000 lb.) w/ Toolbox
- GN 2 5/16" Square (25,000 lb.) w/ Toolbox

## Axle Options

- (2) 10,000# Air / Spring
- (2) 10,000# Electric / Spring \*
- (2) 10,000# Electric / Torsion
- (2) 10,000# Elec/Hyd Disk / Spring
- (3) 10,000# Air / Spring
- (3) 10,000# Electric / Spring
- (3) 10,000# Electric / Torsion
- (2) 10,000# Axle w/Single 17.5 Tires Electric / Spring
- (3) 10,000# Axle w/Single 17.5 Tires Electric / Spring
- (2) 10k Dexter Axles Electric / Spring
- (2) 12,000# Air / Spring
- (2) 12,000# Electric / Spring
- (2) 12,000# Elec/Hyd Disk / Spring
- (3) 12,000# Air / Spring
- (3) 12,000# Electric / Spring
- (3) 12,000# Elec/Hyd Disk / Spring
- (2) 12,000# Load Range G Tires Air / Spring
- (2) 12,000# Load Range G Tires Electric / Spring
- (2) 12,000# Load Range G Tires Elec/Hyd Disk / Spring
- (2) 12k Dexter Axles Electric / Spring
- (2) 16000# 215/75R17.5 Tires Air / Spring
- (2) 16000# 215/75R17.5 Tires Electric / Spring
- Consult Your Sales Rep. for Additional Available Axles

## Tail Options

- 10' Hydraulic Dovetail \*

## Color Options

- Black Powdercoat \*
- Equipment Yellow Powdercoat
- Grey Powdercoat
- Red Powdercoat
- White Powdercoat


## Other Options

- Cold Weather Wiring Harness (7-Way RV)
- Hutch suspension H9700-Underslung Tandem Axle <sup>2</sup>
- AL-KO Axles <sup>2</sup>
- Hutch suspension H9700-Underslung Triple Axle <sup>2</sup>
- Plate for Winch
- 6" Taller GN Riser
- Douglas Fir Lumber
- Under Frame Tie Down Flat
- Battery Charger 12V
- 22 lb. I-Beam Main Frame & Neck <sup>2</sup>
- 12" oc Crossmembers
- 1 Pair D-Rings
- Rough Oak Floor
- Weld-On Strap Ratchets (2)
- Hydraulic Jacks (12,000 lb.) Incl. Front Toolbox <sup>2</sup>
- Goodyear G Rated Tires
- 4" Ratchets every 4ft w/ Slide Track
- 6" Axle Spread (Longer Equalizer)
- 72" Axle Spread
- Steel Floor
- Front Toolbox (PH Only)
- Torque Tube
- Deck on the Neck 8x8 ft
- Side-mount Toolbox
- Winch 12VDC (12,000 lb.) Incl. Front Toolbox
- 2-speed Jacks (12,000 lb.)
- HD Semi Trailer 2x Jacks (25,000 lb.) No Frt T/box

\* Standard Feature

<sup>2</sup> Special Order Option: Requires additional lead-time

## Drawings and Specifications

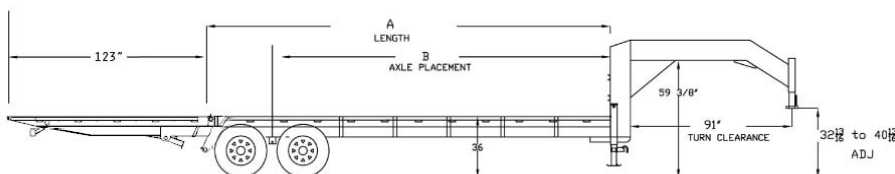

Flatdeck with Hydraulic Dove		
Length	A	B
28'	228"	192"
30'	252"	216"
32'	276"	240"
34'	300"	264"
35'	312"	276"
36'	324"	288"
38'	348"	312"
40'	372"	336"

**TRAILER FLEX**



AIR RIDE SUSPENSION AVAILABLE



# Low-Pro Flatdeck with Duals (LD)



Also Available with a Bumper Pull or Pintle Coupler.



**Lengths**  
20' - 40'

## Standard Features

- 22,400 lb. G.V.W.R.
- 10,000 lb. x 2 G.A.W.R.
- 2 5/16" Gooseneck Ball Coupler (25,000 lb.)
- Safety Chains
- 2 - Drop Leg Jacks (10,000 lb.)
- 2 - Oil Bath Brake Axles (10,000 lb.)
- 6 Leaf Slipper Spring Suspension
- 8 - 16" Grey Dual Wheels w/ 8 on 6.5" BP
- 8 - 16" 245/75R16 Radial Tires (2,778 lb.)
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Side Steps on Both Sides
- 2" x 6" Square Tubing
- Front Toolbox (GN Only)
- 8' Ramps w/ Holders
- 12" x 14 lb. I-Beam Tongue (to 27')
- 12" x 14 lb. I-Beam Main Frame (to 27')
- 3" Channel Crossmembers 16" on Center
- 2" Treated Pine Lumber Deck
- 102" Wide Deck
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- Sealed Wire Harness
- Sand Blasted
- Acid Washed



At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.

## Coupler Options

- GN 2 5/16" Round (25,000 lb.) \*
- BP 2 5/16" Adjustable (25,000 lb.)
- GN 2 5/16" Round (30,000 lb.)
- GN Load-Leveling 2 5/16" Square (30,000 lb.)
- 3" Pintle Eye - Face-mount (36,000 lb.)
- GN 2 5/16" Square (30,000 lb.)
- GN 2 5/16" Square (25,000 lb.)

## Axle Options

- (2) 10,000# Air / Spring
- (2) 10,000# Elec / Spring \*
- (2) 10,000# Elec / Torsion
- (2) 10,000# Elec/Hyd Disk / Spring
- (3) 10,000# Air / Spring
- (3) 10,000# Elec / Spring
- (3) 10,000# Elec / Torsion
- (3) 10,000# Elec/Hyd Disk / Spring
- (2) 12,000# Air / Spring
- (2) 12,000# Elec / Spring
- (2) 12,000# Elec/Hyd Disk / Spring
- (3) 12,000# Air / Spring
- (3) 12,000# Elec / Spring
- (3) 12,000# Elec/Hyd Disk / Spring
- (2) 16,000# 17.5" wheel, Air / Spring
- (2) 16,000# 17.5" wheel, Elec / Spring

## Tail Options

- Straight Deck w/ 2 Slide-in Ramps \*
- 5' Dovetail w/ 2 Flip-over Ramps
- 5' Center Pop-up Dove w/ 2 Flip-over Ramps
- 5' Dovetail w/ 3 Flip-over Ramps


## Color Options

- Black Powdercoat \*
- Grey Powdercoat
- Red Powdercoat
- White Powdercoat

## Other Options

- 6" Taller GN Riser
- 19 lb. I-Beam MainFrame & Neck
- 22 lb. I-Beam MainFrame & Neck (from 19 lb.)
- 12"oc Crossmembers
- 1 Pair D-Rings
- Rough Oak Floor
- Weld-On Strap Ratchets (2)
- Receiver Hitch
- 4" Ratchets every 4ft w/ Slide Rack
- 6" Axle Spread (Longer Equalizer)
- 72" Axle Spread
- Steel Floor & 4 D-Rings
- Diamond Plate Ramp Bottoms
- Torque Tube
- Deck on the Neck
- Side-mount Toolbox
- Winch 12VDC (12,000 lb.)
- 2-speed Jacks (12,000 lb. rating)

## Drawings and Specifications

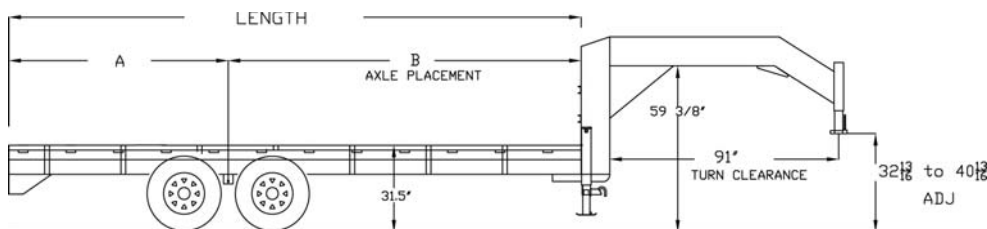

LowPro Flatdeck with Duals		
Length	A	B
20'	92'	148'
22'	102'	162'
24'	112'	176'
25'	115'	185'
26'	114'	198'
28'	123'	213'
30'	124'	236'
32'	131'	253'

LowPro Flatdeck with Duals		
Length	A	B
34'	140'	268'
35'	136'	284'
36'	140'	292'
38'	148'	308'
40'	144'	336'

## Notes:

- 30' and up includes Frame Bridging

\* Standard Feature

<sup>2</sup> Special Order Option: Requires additional lead-time



AIR RIDE SUSPENSION AVAILABLE



# Low-Pro with Hydraulic Dove (LY)



Also Available with a Bumper Pull or Pintle Coupler.



**Lengths**  
30' - 40'

## Standard Features

- 22,400 lb. G.V.W.R.
- 10,000 lb. x 2 G.A.W.R.
- 2 5/16" Gooseneck Ball Coupler (25,000 lb.)
- Safety Chains
- 2 - Drop Leg Jacks (10,000 lb.)
- 2 - Oil Bath Brake Axles (10,000 lb.)
- 6 Leaf Slipper Spring Suspension
- 8 - 16" Grey Dual Wheels w/ 8 on 6.5" Bolt Pattern
- 8 - 16" 245/75R16 Radial Tires (2,778 lb.)
- Interstate Deep Cycle Battery
- Self Contained Hydraulic Unit
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Side Steps on Both Sides
- Front Toolbox (GN Only)
- 10' Hydraulic Dovetail
- 12" x 19 lb. I-Beam Main Frame, Riser & Neck
- 3" Channel Crossmembers 16" on Center
- 2 x 6 x 1/8" Square Tubing Outer Deck Frame
- 2" Treated Pine Lumber Deck
- 102" Wide Deck
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- Sealed Wire Harness
- Sand Blasted, Acid Washed, Powder Coated

**POWDER COATED**

At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.

## Coupler Options

- GN 2 5/16" Round (25,000 lb.) w/ Toolbox \*
- Ball Coupler 2 5/16" Adjustable (25,000 lb.)
- GN 2 5/16" Round (30,000 lb.) w/ Toolbox
- GN Load-Leveling 2 5/16" Square (30,000 lb.) & Tbx
- 3" Pintle Eye - Face-mount (36,000 lb.)
- GN 2 5/16" Square (30,000 lb.) w/ Toolbox
- GN 2 5/16" Square (25,000 lb.) w/ Toolbox

## Axle Options

- (2) 10,000# Air / Spring
- (2) 10,000# Electric / Spring \*
- (2) 10,000# Electric / Torsion
- (2) 10,000# Elec/Hyd Disk / Spring
- (3) 10,000# Air / Spring
- (3) 10,000# Electric / Spring
- (3) 10,000# Electric / Torsion
- (3) 10,000# Elec/Hyd Disk / Spring
- (2) 10k Dexter Axles Electric / Spring
- (2) 12,000# Air / Spring
- (2) 12,000# Electric / Spring
- (2) 12,000# Elec/Hyd Disk / Spring
- (3) 12,000# Air / Spring
- (3) 12,000# Electric / Spring
- (3) 12,000# Elec/Hyd Disk / Spring
- (2) 12k Dexter Axles Electric / Spring

## Tail Options

- 10' Hydraulic Dovetail \*


## Color Options

- Black Powdercoat \*
- Equipment Yellow Powdercoat
- Grey Powdercoat
- Red Powdercoat
- White Powdercoat

## Other Options

- Cold Weather Wiring Harness (7-Way RV)
- Hutch suspension H9700-Underslung Tandem Axle <sup>2</sup>
- AL-KO Axles <sup>2</sup>
- Hutch suspension H9700-Underslung Triple Axle <sup>2</sup>
- Plate for Winch
- 6" Taller GN Riser
- Douglas Fir Lumber
- Under Frame Tie Down Flat
- Battery Charger 12V
- 22 lb. I-Beam Main Frame & Neck <sup>2</sup>
- 12" oc Crossmembers
- 1 Pair D-Rings
- Rough Oak Floor
- Weld-On Strap Ratchets (2)
- Hydraulic Jacks (12,000 lb.) Incl. Front Toolbox <sup>2</sup>
- 4" Ratchets every 4ft w/ Slide Track
- 6" Axle Spread (Longer Equalizer)
- 72" Axle Spread
- Front Toolbox (PH Only)
- Torque Tube
- Deck on the Neck 8x8 ft
- Side-mount Toolbox
- Winch 12VDC (12,000 lb.) Incl. Front Toolbox
- 2-speed Jacks (12,000 lb.)
- HD Semi Trailer 2x Jacks (25,000 lb.) No Frt T/box

## Drawings and Specifications

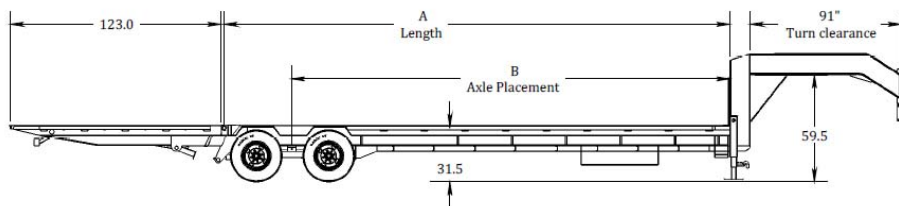

LowPro with Hydraulic Dove		
Length	A	B
28'	228"	192"
30'	252"	216"
32'	276"	240"
34'	300"	264"
35'	312"	276"
36'	324"	288"
38'	348"	312"
40'	372"	336"

**TRAILER FLEX**



AIR RIDE SUSPENSION AVAILABLE

\* Standard Feature

<sup>2</sup> Special Order Option: Requires additional lead-time



# 8" I-Beam Deckover (F8)



Also Available with a Gooseneck Coupler.



**Lengths**  
16' - 26'


## Standard Features

- Front Toolbox (GN Only)
- 14,000 lb. G.V.W.R.
- 7,000 lb. x 2 G.A.W.R.
- 2 5/16" Adjustable Ball Coupler
- Safety Chains
- 1 - Drop Leg Jack (10,000 lb.)
- 2 - Posi-lube Brake Axles (7,000 lb.)
- 6 Leaf Slipper Spring Suspension
- 4 - 16" White Spoke Wheels
- 4 - 235/80R16 Radial Tires (3,520 lb.)
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Tool Tray
- 6' 6" Slide in Ramps w/ Holders
- 8" x 10 lb. I-Beam Tongue
- 8" x 10 lb. I-Beam Main Frame
- 3" Channel Crossmembers 16" on Center
- 2" Treated Pine Lumber Deck
- 96" Wide Deck
- 2 x 6 x 1/8" Square Tubing Outer Deck Frame
- DOT Approved Flushmount Lifetime LED Lights
- Amber Side Turn Flashers
- Sealed Wire Harness
- Sand Blasted, Acid Washed, Powder Coated



At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.

## Drawings and Specifications

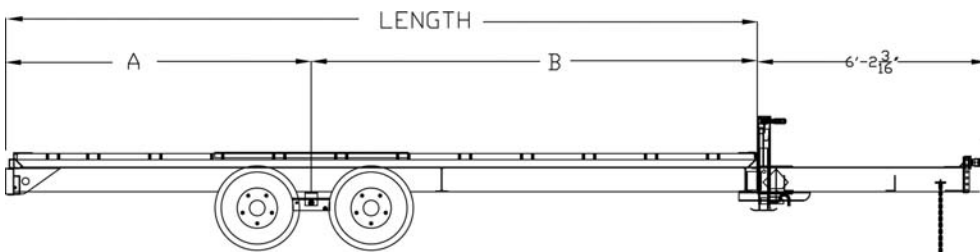

8" I-Beam Deckover		
Length	A	B
16'	77"	115"
18'	86"	130"
20'	92"	148"
22'	102"	162"
24'	112"	176"
26'	114"	198"



AIR RIDE SUSPENSION AVAILABLE

## Coupler Options

- BP 2 5/16" Adjustable (14,000 lb.) \*
- Rigid mount 2-5/16 (25,000 lb.)
- GN 2 5/16" Round (30,000 lb.) w/ Toolbox
- GN Load-Leveling 2 5/16" Square (30,000 lb.) & Tbx
- 3" Pintle Eye - Channel-mount (21,000 lb.)
- GN 2 5/16" Square (30,000 lb.) w/ Toolbox
- GN 2 5/16" Round (25,000 lb.) w/ Toolbox
- GN 2 5/16" Square (25,000 lb.) w/ Toolbox

## Axle Options

- (2) 5,200# Electric / Spring
- (3) 5,200# Electric / Spring
- (2) 7,000# Electric / Spring \*
- (2) 7,000# Electric / Torsion
- (2) 7,000# Hydraulic Drum / Spring
- (2) 7,000# Elec/Hyd Disk / Spring
- (2) 7,000# Elec/Hyd Disk / Torsion
- (3) 7,000# Electric / Spring
- (3) 7,000# Electric / Torsion
- (3) 7,000# Elec/Hyd Disk / Spring
- (2) 7,000# Load Range G 14ply Tires Electric / Spring
- (3) 7,000# Load Range G 14ply Tires Electric / Spring
- (2) 8,000# Oil Bath Axles w/ 235-80 Tires Electric / Spring
- (2) 8,000# Load Range G Tires Electric / Spring

## Tail Options

- Straight Deck w/ 6'6" Slide-in Ramps \*
- 3' Dovetail w/ 5' Slide-in Ramps (18' and up)
- 3' Dovetail w/ 2, 18"x60" Foldup Ramps
- 3' Dovetail w/ 3, 18"x60" Foldup Ramps
- 3' Dovetail w/ 2, 31"x66" Foldup Ramps
- 5' dove with 2 Flipover Ramps (Must Have R option)
- 5' dove with 3 Flipover Ramps (Must Have R option)

## Color Options

- Black Powdercoat \*
- Equipment Yellow Powdercoat
- Grey Powdercoat
- Red Powdercoat
- White Powdercoat

## Other Options

- Cold Weather Wiring Harness (7-Way RV)
- Plate for Winch
- 6" Taller GN Riser
- Douglas Fir Decking
- 9,990 G.V.W.R.
- 12"oc Crossmembers
- 1 Pair D-Rings
- Rough Oak Floor
- Weld-On Strap Ratchets (2)
- 2nd Jack
- Receiver Hitch
- Goodyear G Rated Tires
- 4" Ratchets every 4ft w/ Slide Track
- Mount Only for Spare Tire
- 1/4" Diamond Plate Steel Floor
- Steel Floor & 4 D-Rings
- Front Toolbox (Bumper Pull)
- 102" Deck Width
- Rear Support Jacks (Dovetail and 96" Only)
- Spare Tire and Mount (Bumper Pull)
- Deck on the Neck (GN Only)
- Side-mount Toolbox
- Winch 12VDC (12,000 lb.) Incl. Front Toolbox
- 2-speed Jacks (12,000 lb.)

\* Standard Feature

² Special Order Option: Requires additional lead-time

# Flatdeck Options Guide

## Tail Options



Straight Deck w/ 8' Slide-in Ramps



5' Dovetail w/ 2 Flip-Over Ramps



5' Center Pop-up Dove w/ 2 Flip-Over Ramps



5' Split Pop-up Dove w/ 5' Slide-in Ramps



5' Dovetail w/ 3 Flip-Over Ramps

## Color Options



Black Powder Coat



Eq. Yellow Powder Coat



Grey Powder Coat



White Powder Coat



Red Powder Coat

## Other Options



12"oc Crossmembers



D-Rings



Rough Oak Floor



Weld On Strap Ratchets (2)



Receiver Hitch



72" Axle Spread



Sliding Strap Ratchets



Steel Floor & 4 D-rings



2 Speed Jacks



Diamond Plate Ramp Bottoms



Torque Tube



Deck On The Neck



Side-Mount Toolbox



Wood Rack



**TRAILER FLEX** TrailerFlex Air Ride Suspension



## PJ TRAILERS

- #1 Professional Grade Open Trailer Manufacturer
- Broad Line of Dumps, Flatdecks, Utilities, Tilts & Equipment Trailers
- Over 300 Independent PJ Trailers Dealer Locations in the US & Canada

Visit Us Online at [www.pjtrailers.com](http://www.pjtrailers.com)

