

**MICHELIN**<sup>®</sup>

**XL**<sup>™</sup>

The tactical vehicle radial  
engineered for rugged,  
dependable mobility  
on all types of terrain.



**MICHELIN**

# MICHELIN® XL™

A rugged, dependable all-terrain tactical vehicle radial.

**Self-cleaning tread pattern** with buttressed shoulders delivers enhanced traction in the mud.

**Cut-resistant tread compound** is reinforced with durable steel-belted radial construction to provide excellent puncture and damage resistance.

**Tubeless construction** compatible with central tire inflation systems as well as bead locks and/or run-flat devices.\*

**Full-width, elastic protector ply** helps protect the working plies from bruising and penetrations, lowering downtime.

**Sidewall design** allows for the low-pressure operation necessary to provide floatation and traction in soft soil.

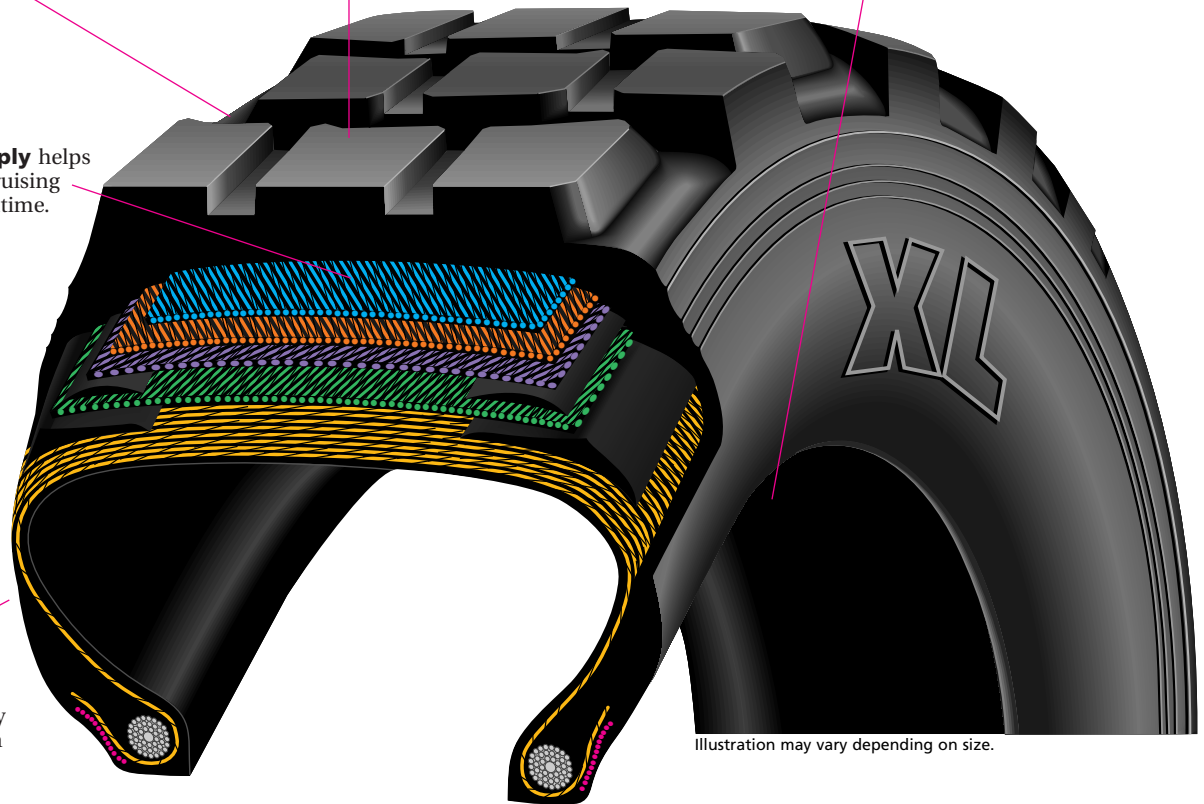


Illustration may vary depending on size.

## Specifications for Tread Design: XL™

\* Except for 16.00 R20 XL. May be used with tube.

| Size        | Tread | Load Range | Catalog Number | Loaded Radius in. | Overall Diameter in. | Overall Width ‡ in. | Approved Rims width | Min. Dual Spacing ‡ in. | Revs Per Mile | Tread Depth 32nds | Max Speed mph <sup>(1)</sup> | Max Tire Load Single |     | Max Tire Load Dual |     |
|-------------|-------|------------|----------------|-------------------|----------------------|---------------------|---------------------|-------------------------|---------------|-------------------|------------------------------|----------------------|-----|--------------------|-----|
|             |       |            |                |                   |                      |                     |                     |                         |               |                   |                              | lbs.                 | PSI | lbs.               | PSI |
| 9.00R16     | XL    | D          | 07576          | 16.6              | 36.1                 | 9.8                 | 6.50                | —                       | 577           | 17                | 62                           | 3970                 | 80  | —                  | —   |
| 11.00R16    | XL    | E          | 64618          | 17.8              | 38.7                 | 10.9                | 6.50                | —                       | 538           | 17                | 62                           | 4520                 | 80  | —                  | —   |
| 14.75/80R20 | XL    | J          | 83430          | 20.5              | 45.1                 | 14.4                | 10.00               | —                       | 464           | 28                | 50                           | 10150                | 125 | —                  | —   |
| 15.5/80R20  | XL    | J          | 04852          | 21.3              | 46.6                 | 15.5                | 10.00               | —                       | 448           | 30                | 50                           | 12125                | 125 | —                  | —   |
| 11.00R20    | XL    | H          | 35071          | 20.1              | 43.1                 | 11.1                | 8.00, 7.50          | 12.6                    | 481           | 23                | 65                           | 7200                 | 115 | 6360               | 115 |
| 14.00R20    | XL    | J          | 12876          | 22.6              | 49.4                 | 14.7                | 10.00               | 16.7                    | 422           | 31                | 56                           | 9920                 | 100 | 8900               | 100 |
| 14.5R20     | XL    | L          | 15668          | 19.8              | 43.4                 | 14.4                | 11.00, 12.00        | —                       | 482           | 25                | 56                           | 7165                 | 80  | —                  | —   |
| 16.00R20    | XL    | J          | 00451          | 24.3              | 53.1                 | 16.0                | 10.00               | —                       | 391           | 31                | 55                           | 10000                | 100 | —                  | —   |

Note: Rim listed first is the measuring rim.

‡ Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly.

Michelin tires and tubes are subject to a continuous development program. Michelin North America reserves the right to change product specifications at any time without notice or obligations.

(1) Exceeding the lawful speed limit is neither recommended nor endorsed.

[www.michelintruck.com](http://www.michelintruck.com)



An Equal Opportunity Employer ©1999 MNA, MWL 41152

MICHELIN NORTH AMERICA (CANADA) INC.  
Laval, Quebec, Canada

MICHELIN NORTH AMERICA, INC.  
Greenville, South Carolina, USA

MICHELIN MEXICO S.A. DE C.V.  
Mexico City, Mexico