

MICHELIN[®]

XML[™]

The all-terrain radial for tactical vehicles designed with the latest high-mobility technology optimized for outstanding mud traction and off-road durability.



MICHELIN

MICHELIN® XML™

The latest in Michelin all-terrain high mobility technology.

Full-width belt protection and elastic protector ply help protect the casing from bruising and penetrations.

All-Terrain non-directional computer enhanced tread design delivers excellent soft soil mobility, through improved self-cleaning capabilities.

Offset shoulder design for increased traction in soft soil.

Radial casing design to operate at lower pressures to offer improved mobility and increased enveloping capabilities to resist impacts.

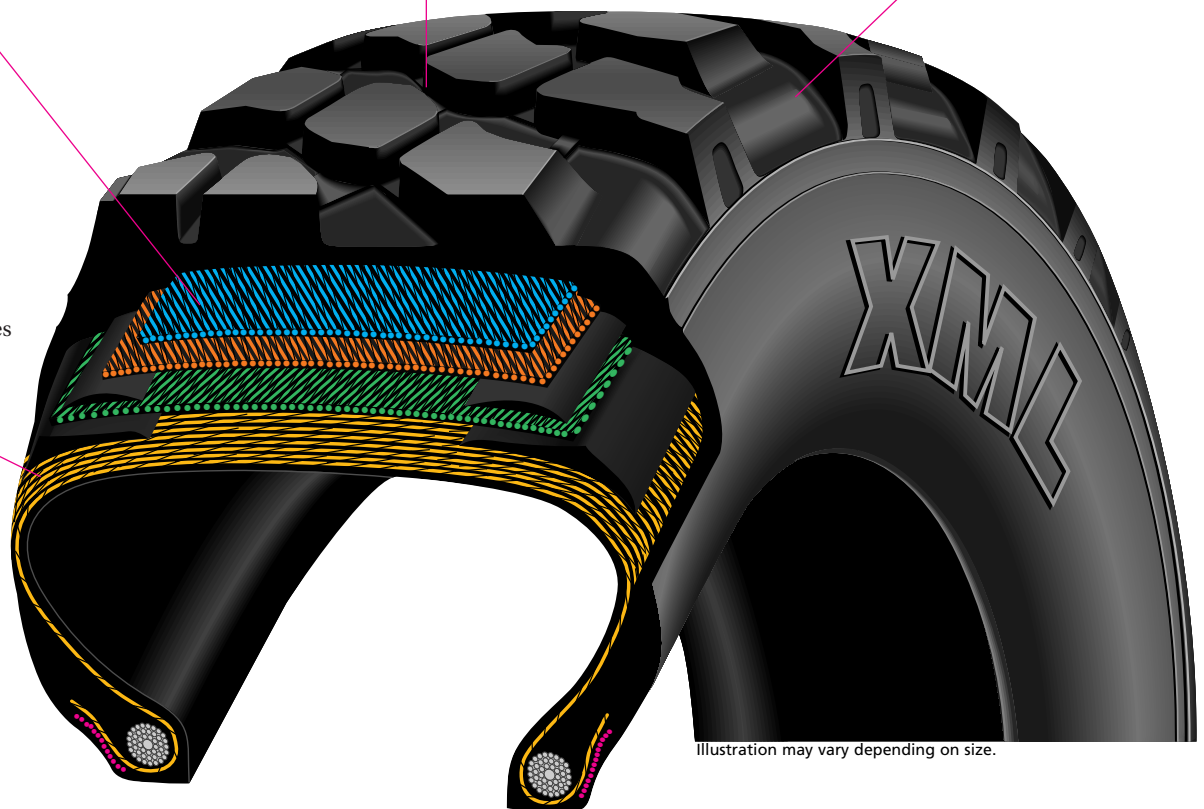


Illustration may vary depending on size.

Specifications for Tread Design: XML™

Size	Tread	Load Range	Catalog Number	Loaded Radius in.	Overall Diameter in.	Overall Width ‡ in.	Approved Rims width	Min. Dual Spacing ‡ in.	Revs Per Mile	Tread Depth 32nds	Max Speed mph ⁽¹⁾	Max Tire Load Single		Max Tire Load Dual	
												lbs.	PSI	lbs.	PSI
325/85R16	XML	D	37984	17.7	38.7	12.9	9.00	—	540	21	62	5070	65	—	—
395/85R20	XML	G	32764	21.3	46.7	15.4	10.00	—	448	30	55	9645	95	—	—
12.00R20	XML	J	63997	20.7	44.5	12.2	8.50	13.7	465	25	62	7165	105	6615	105

Note: Rim listed first is the measuring rim.

‡ Overall widths will change 0.1 inch for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly.

Michelin tires and tubes are subject to a continuous development program. Michelin North America reserves the right to change product specifications at any time without notice or obligations.

(1) Exceeding the lawful speed limit is neither recommended nor endorsed.

www.michelintruck.com



An Equal Opportunity Employer ©1999 MNA, MWL 41151

MICHELIN NORTH AMERICA (CANADA) INC.
Laval, Quebec, Canada

MICHELIN NORTH AMERICA, INC.
Greenville, South Carolina, USA

MICHELIN MEXICO S.A. DE C.V.
Mexico City, Mexico